

TLB-220

SPECIFICATIONS
ALLMAND TLB-220

SPECIFICATIONS

Engine	Gasoline: Kohler CH20S, 20 hp, air cooled
Transmission	Hydrostatic
Drive Motor	Ross ME series hydraulic
Power Steering	Load-sensing hydraulic steering with balanced steering cylinder
Differential	Limited slip
Speed Range	0 to 5.5 mph (0 to 8.8 km/h)
Tires	Front: 23 x 8.5 - 12 (std.) 23 x 10.5 - 12 (optional) Rear: 31 x 15.5 - 15
Capacities	Fuel: 12 gal. (45.4 L) Hydraulic oil: 10 gal. (38 L)
Loader	Single-lever joystick with bucket float Bucket: 1/3 cu. yd. (.25 cu. m) Breakout force: 2,600 lbs. (1170 kg) Lift capacity: 1,700 lbs. (765 kg) Digging depth: 4 in. (10.2 cm)
Brakes	Hydrostatic service brake Band type parking brake
Backhoe	Digging force: 2,875 lbs. (1293.75 kg) @ bucket 2,265 lbs. (1019.25 kg) @ dipper Digging depth: 8 ft. 4 in. (2.54 m) (7 ft. 6 in. [2.29 m] 2 ft. flat bottom) Buckets: 9 in. (22.9 cm), 12 in. (std.) (30.5 cm), 16 in. (40.6 cm), 18 in. (45.7 cm), 24 in. (61 cm), 36 in. (91.4 cm) 180-degree swing arc with cushioned swing cylinders Reversible grouser pads Stabilizers extend to 10 in. (25.4 cm) below grade 12 ft. 10 in. (3.91 m)
Transportation	
Length	
Weight	3,115 lbs. (1406 kg)




WORKING RANGE

- A. Maximum lift height (bucket pivot): 90 in. (2.29 m)
- B. Clearance with bucket dumped: 76 in. (1.93 m)
- C. Reach @ maximum height: 30 in. (76.2 cm)
- D. Bucket dump angle: 25 degrees
- E. Reach @ grade: 54 in. (1.37 m)
- F. Bucket rollback angle: 40 degrees
- G. Loader digging depth: 4 in. (10.2 cm)
- H. Backhoe digging depth: 8 ft. 4 in. (2.54 m)
(7 ft. 6 in. [2.29 m] 2 ft. flat bottom)
- I. Straight wall digging depth: 4 ft. 1 in. (1.24 m)
- J. Digging depth (8 ft. flat bottom): 5 ft. 8 in. (1.73 m)
- K. Maximum loading height: 5 ft. 6 in. (1.68 m)
- L. Reach from swing post: 9 ft. 11 in. (3.02 m)

DIMENSIONS

Length	16 ft. (4.87 m)
Height	82.5 in. (2.09 m) (ROPS)
Width	56 in. (1.42 m)
Wheelbase	65 in. (1.65 m)
Bucket width	56 in. (1.42 m)
Ground clearance	9 in. (22.8 cm)

Photos shown
may include
non-standard
equipment.
Specifications
are subject to
change without
prior notice.

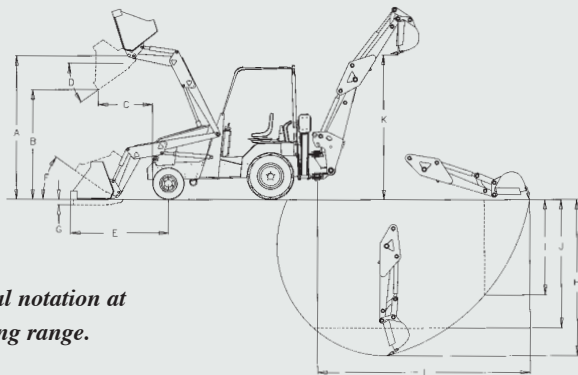

See alphabetical notation at
right for working range.

Sold and serviced by:



Reliability,
performance,
and integrity
since 1938.

Made in USA

Allmand™

Allmand Bros. Inc.
P.O. Box 888
Holdrege, NE 68949
800-562-1373
308-995-4495
Fax: 308-995-5887
www.allmand.com

TLB-225

SPECIFICATIONS
ALLMAND TLB-225

SPECIFICATIONS

Engine	Diesel: Kubota 905 23.5 hp liquid cooled
Transmission	Hydrostatic
Drive Motor	Ross ME series hydraulic
Power Steering	Load-sensing hydraulic steering with balanced steering cylinder
Differential	Limited slip
Speed Range	0 to 5.0 mph (0 to 8.0 km/h)
Tires	Front: 23 x 8.5 - 12 (std.) 23 x 10.5 - 12 (optional) Rear: 31 x 15.5 - 15
Capacities	Fuel: 12 gal. (45.4 L) Hydraulic oil: 10 gal. (38 L)
Loader	Single-lever joystick with bucket float Bucket: 1/3 cu. yd. (.25 cu. m) Breakout force: 2,600 lbs. (1170 kg) Lift capacity: 1,700 lbs. (765 kg) Digging depth: 4 in. (10.2 cm)
Brakes	Hydrostatic service brake Band type parking brake
Backhoe	Digging force: 2,875 lbs. (1293.75 kg) @ bucket 2,265 lbs. (1019.25 kg) @ dipper Digging depth: 8 ft. 4 in. (2.54 m) (7 ft. 6 in. [2.29 m] 2 ft. flat bottom) Buckets: 9 in. (22.9 cm), 12 in. (std.) (30.5 cm), 16 in. (40.6 cm), 18 in. (45.7 cm), 24 in. (61 cm), 36 in. (91.4 cm) 180-degree swing arc with cushioned swing cylinders Reversible grouser pads Stabilizers extend to 10 in. (25.4 cm) below grade 12 ft. 10 in. (3.91 m)
Transportation Length Weight	3,211 lbs. (1460 kg)




WORKING RANGE

- A. Maximum lift height (bucket pivot): 90 in. (2.29 m)
- B. Clearance with bucket dumped: 76 in. (1.93 m)
- C. Reach @ maximum height: 30 in. (76.2 cm)
- D. Bucket dump angle: 25 degrees
- E. Reach @ grade: 54 in. (1.37 m)
- F. Bucket rollback angle: 40 degrees
- G. Loader digging depth: 4 in. (10.2 cm)
- H. Backhoe digging depth: 8 ft. 4 in. (2.54 m)
(7 ft. 6 in. [2.29 m] 2 ft. flat bottom)
- I. Straight wall digging depth: 4 ft. 1 in. (1.24 m)
- J. Digging depth (8 ft. flat bottom): 5 ft. 8 in. (1.73 m)
- K. Maximum loading height: 5 ft. 6 in. (1.68 m)
- L. Reach from swing post: 9 ft. 11 in. (3.02 m)

DIMENSIONS

Length	16 ft. (4.87 m)
Height	82.5 in. (2.09 m) (ROPS)
Width	56 in. (1.42 m)
Wheelbase	65 in. (1.65 m)
Bucket width	56 in. (1.42 m)
Ground clearance	9 in. (22.8 cm)

Photos shown may include non-standard equipment. Specifications are subject to change without prior notice.

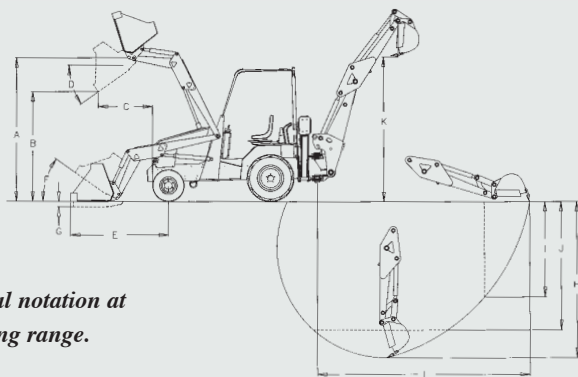

See alphabetical notation at right for working range.

Sold and serviced by:



Reliability,
performance,
and integrity
since 1938.

Made in USA

054KN3.5

Allmand™

Allmand Bros. Inc.
P.O. Box 888
Holdrege, NE 68949
800-562-1373
308-995-4495
Fax: 308-995-5887
www.allmand.com