



**Tank Tops
New Sizes
Available!**

ROLLING SAFETY LADDERS • PERSONNEL LIFTS • WORK PLATFORMS • CARTS



BALLYMORE

ELEVATION THROUGH INNOVATION



TANK TOP LIFT PLATFORM • PAGE 17



STEEL ROLLING LADDERS • PAGE 16



NEW
**MANUFACTURING
FACILITY AND
VERTICAL ACCESS
INNOVATION
CENTER NOW
OPEN!**

We specialize in
Custom Ladders, Lifts
& Platforms to meet
your requirements.
Short lead times,
Uncompromising
Quality & Exceptional
Service!



NEW
**Driveable
Vertical Mast Lift
See Page 19**



LOCK-N-STOCK • PAGE 5



PORTABLE LOADING DOCK • PAGE 26



CANTILEVERS • PAGE 17



DVML-18 • PAGE 22



ELEVATION INNOVATION AND SERVICE

SINCE 1945

when Ballymore began manufacturing rolling safety ladders we've been committed to quality construction, innovative product development and customer service.

EVEN MORE CAPACITY

NEW MANUFACTURING & INNOVATION CENTER

- EXPANDED PRODUCTION & DISTRIBUTION CAPACITY
- INCREASED CUSTOM ENGINEERING CAPABILITIES

TODAY

we build upon our history of growth with the addition of another, state of the art manufacturing facility and innovation center in Coatesville, Pennsylvania.




The new 35,000 sq. ft. plant adds to existing manufacturing & distribution facilities equipping us with the capacity to continue to support our customer's growth needs while improving delivery performance, quality and service.



Coatesville, PA
Manufacturing & Custom
Product Development Facility



Coatesville, PA
Lift Division

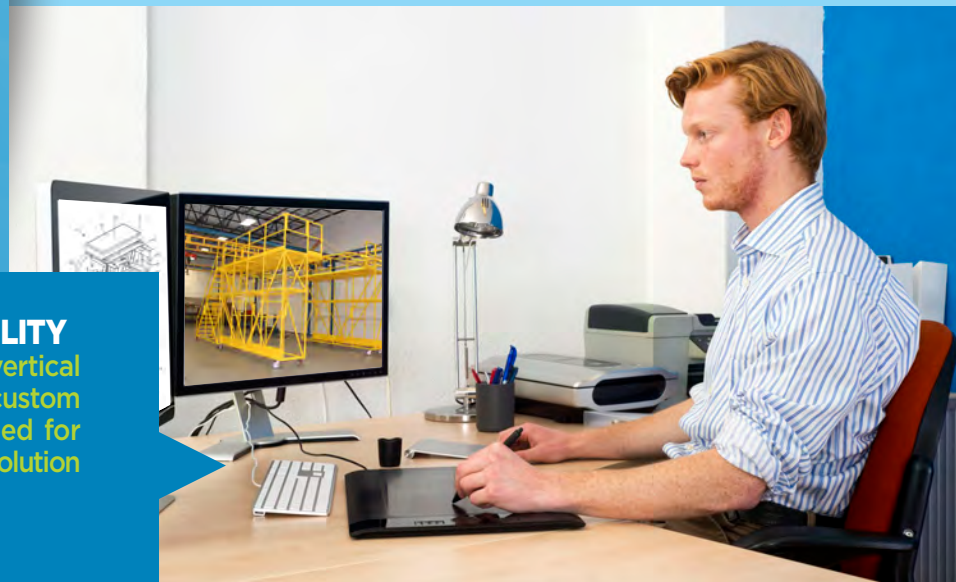

EXPANDED CUSTOM SOLUTION CAPABILITY

Ballymore engineers & manufactures custom vertical access solutions for customers with unique or custom requirements. Don't see exactly what you need for your application? Call today to explore a custom solution to meet your needs: **800-762-8327**

WHY BALLYMORE?

MORE **PATENTED** VERTICAL ACCESS INNOVATIONS

• **Weight Actuated Lockstep**

The safest, most durable Lockstep on the market today. Allows ladder to lock to the floor when 70 lbs. is applied to any of the steps. Prevents workers from hopping over the bottom step and rolling the ladder while they are on it, or have co-workers push them around. The preferred lock step of many Loss Prevention professionals.

• **Boxed Ladders & Platforms**

Patented ladder & work platform designs ship, stack & store in a box.

- Minimizes Risk of Freight Damage
- Lowers shipping costs
- Boxes stack easily allowing cost effective stocking of ladders

• **Power Stocker Lift**

Patented manually propelled and driveable hydraulic order picker with optional sensing system that creates a safety zone around the lift alerting the operator of activity below the lift

• **The Navigator Safety Ladder**

Patented design easily turns through tight aisles on retail floors or in stock rooms.

REPLACEABLE COMPONENTS

Extend ladder life with replaceable locksteps, handrails, base frames & rear verticals. Most parts ship by UPS so your ladders can be back in service quickly.

HEAVY DUTY CONSTRUCTION AND BETTER COMPONENTS

• **Deeper Top Steps**

All ladders 5 steps and above feature a 14" Deep Top Step, compared to competitor's 10" deep top step.

• **High Quality Casters**

Ballymore ladders roll on the best casters in the industry, featuring poly tread, ball bearings, and dust covers

• **Dual Lockstep Pedals**

Our standard lockstep has two release pedals for increased convenience. Some competitor's offer a single pedal only.

• **Heavy Duty Construction**

The base frame and rear verticals of our Monster Line, Heavy Duty Slope Ladder series, Cantilever Ladders and Work Platforms are designed with heavy duty 2" x 1" rectangular tubing.

MORE SAVINGS

BALLYMORE'S PATENTED LADDER IN A BOX

- **LOWERS SHIPPING COSTS**
- **MINIMIZES THE RISK OF FREIGHT DAMAGE**
- **BOXES STACK EASILY**

allowing cost effective stocking of ladders

TABLE OF CONTENTS

How to Select the Right Ladder.....	4
Standard Rolling Ladder	5
Lock-N-Stock Folding Ladder	5
Heavy Duty M-2000 Rolling Ladder.....	6
All Directional Ladder	7
Navigator All Directional Ladder.....	7
Stairway Slope Ladders.....	8
Replacement Parts	8
Extra Heavy Duty Monster Line Ladder.....	9
Stock Picking Ladder.....	9
Weight Actuated Lockstep Ladder	10-11
Tilt & Roll Ladder.....	12
Fold-N-Store Ladder	12
Mobile Work Platform	13
Adjustable Height Work Platform.....	14
Fork Deck Platforms	14
Truck/Dock Ladders.....	14
Aluminum Ladders.....	15
Aluminum Lock-N-Stock.....	15
Wheel Barrow Ladders	15
Stainless Steel Ladder.....	16
Cantilever Series Ladder	17
Tank Top Lift	17
PowerStocker Lifts	19
Mini Scissor Lift.....	20
Merchandise Lift	20
Driveable Scissor Lifts	21
Mobile Vertical Single Person Lift	22
Driveable Vertical Mast Lift	22
BallyLift	23
MR Maintenance Lift	23
Single Person Maintenance Lift...	24
Heavy Duty Lift	24
Industrial Crossover Platforms.....	25
Carts	25
Portable Loading Dock	26
Stackers.....	26
Custom Vertical Access Solutions	27
Policies and Warranties	27

PARTNERSHIP COMMITMENT

Ballymore works closely with our partners to collaboratively develop sales opportunities which include the design and engineering of custom vertical access solutions. We pride ourselves in being a supplier of both standard and custom ladders and lifts.

SELECTING THE RIGHT ROLLING LADDER

What to consider when selecting the proper ladder for your application.

MORE SAVINGS

BALLYMORE'S PATENTED LADDER IN A BOX

- LOWERS SHIPPING COSTS
- MINIMIZES THE RISK OF FREIGHT DAMAGE
- BOXES STACK EASILY
allowing cost effective stocking of ladders

Patent No.:
US 7,828,115 B2




Weight Actuated Lockstep Ladder



Standard Lockstep Ladder



Spring Loaded Caster Ladder

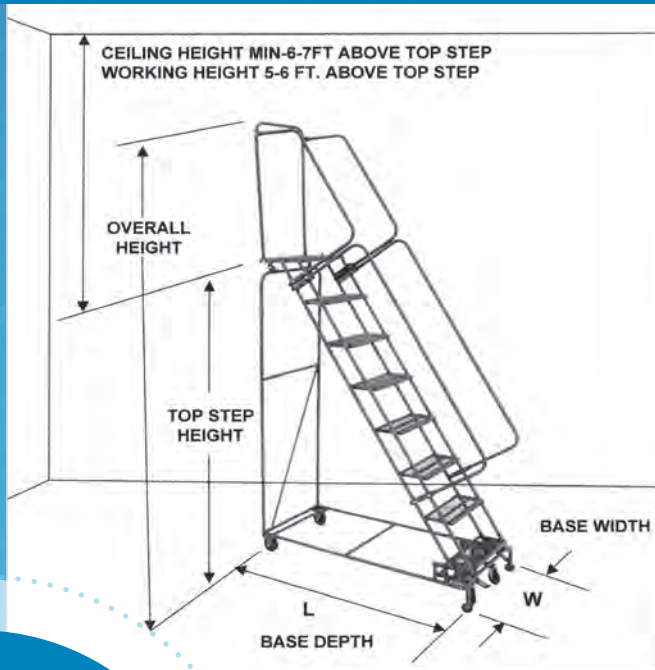

Size Considerations

- Select Platform Height, also known as Top Step Height, based on operations to be performed.
- Platform Height is where the user generally stands. Make sure you have minimum clearance of 6 to 7 feet from the ceiling or any object suspended from the ceiling to insure the user has room to stand safely.
- Maintain maximum working height of 5 feet to 6 feet above the platform height.
- For larger ladders, choose a wide ladder over a narrow one if space permits. For bulky loads, consider a stairway slope ladder and/or deeper top step.

- Consider limitations on ladder dimensions imposed by doorways, aisle width and corners the ladder needs to turn. For tight spaces, select a narrow or all directional ladder for maximum maneuverability.

NOTE: Load capacity (lbs.) is the combined weight of user & materials.

Locking Mechanisms

- **Weight Actuated Lock Step:** This Patented state of the art lock step automatically actuates when 70 lbs. of weight is applied to the stair section. It is the safest and most durable lock step on the market today.
- **Standard Lock Step Ladder:** Ideal for applications 5 steps and above. These ladders are raised into the rolling position when the lock step is actuated. Releasing the lock step drops the ladder into the climbing position with the feet firmly on the floor.
- **Spring-loaded Casters:** Ideal for shorter ladders with 5 steps or less. On this style ladder, the wheels retract under the user's weight securing the ladder safely to the floor.

Climbing Position


The rolling ladder is designed for the worker to face the steps when climbing or descending.

"Stairway Slope" ladders offer a more gradual 50 degree slope, which may be preferable when carrying heavy or bulky items up or down a ladder.

Material Type

- **Steel:** For all around general purpose.
- **Stainless:** For corrosive environment as well as outdoor use.
- **Aluminum:** Like Stainless they are corrosion resistant but approximately 1/3 the weight of steel or stainless.

TREAD SELECTION GUIDE



Abrasive Mat Tread (R):
Provides non-slip footing for safe climbing.
Perfect for clean retail or office environments.



Perforated Tread (P):
Excellent slip resistance. Used extensively in retail and storeroom applications.



Expanded Metal Tread (X):
This aggressive self-cleaning tread is ideal for the warehouse or retail floor & allows debris to fall through the tread



Serrated Tread (G):
This most aggressive tread is ideal for the shop floor or any industrial application where maximum slip resistance is required.

STANDARD ROLLING LADDERS WITH SPRING LOADED CASTERS

- 500 lb. capacity • Working heights up to 12'
- Spring loaded swivel casters retract under user's weight
- 7" deep steps with 10" deep top step on 1 - 4 step models shown with (*) or (**) in the chart below
- 14" deep top step on 4 - 7 step FSH models
- **Specify tread type when ordering**
- 1 - 4 step ladders (*) & (**) ship unassembled in a box, and are eligible for UPS shipping
- 4 - 7 step FSH models ship unassembled
- Specify set-up (SU) if required***
- Available in all welded construction
- Gray powder coat finish
- Built to OSHA and ANSI standards
- CAL OSHA available



FSH526X

STEPS INCLUDING TOP STEP	HEIGHT INCHES		16" WIDE STEP			24" WIDE STEP		
	TOP STEP	OVER ALL	MODEL #	BASE W" x L"	WGT Lbs.	MODEL #	BASE W" x L"	WGT Lbs.
NO HANDRAILS								
1 STEP	12	12	118*	18 x 16	18	126*	26 x 16	20
2 STEP	19	19	218*	20 x 19	22	226*	30 x 19	28
3 STEP	28.5	28.5	318*	20 x 25	31	326*	30 x 25	36
4 STEP	38	38	418*	20 x 31	42	426*	30 x 31	51
WITH HANDRAILS								
2 STEP	19	49	*H218♦	20 x 19	36	*H226♦	30 x 19	42
3 STEP	28.5	58.5	*H318♦	20 x 25	45	*H326♦	30 x 25	50
4 STEP	38	68	*H418♦	20 x 31	56	*H426♦	30 x 31	65
4 STEP	40	73	FSH418	20 x 35	68	FSH426	30 x 35	80
5 STEP	50	83	FSH518	20 x 42	75	FSH526	30 x 42	87
6 STEP	60	93	FSH618	24 x 49	83	FSH626	30 x 49	98
7 STEP	70	103	FSH718	24 x 56	89	FSH726	30 x 56	108

*Eligible for UPS ♦ Handrails may ship in separate box

LOCK-N-STOCK AND NEW MODIFIED LOCK-N-STOCK

Both the Lock-N-Stock and new Modified Lock-N-Stock have a 58° slope and 7" Deep Steps. Our Standard Lock-N-Stock has 7" Deep Top Step where as our Modified Lock-N-Stock has a 10" Deep Top Step. Our Standard Lock-N-Stock has 22" high handles where as our Modified Lock-N-Stock has 30" handrails along with a rear guard rail.

MODEL NUMBER	STEPS INCLUDING TOP STEP	TOP STEP HEIGHT	WEIGHT LBS.	OPEN WIDTH & LENGTH	FOLDED SIZE	SHIPS UPS (Oversize)
LS2247	2 STEP	19"	31 lbs.	24 x 17	10 x 24 x 41	YES
LS3247	3 STEP	28.5"	37 lbs.	24 x 23	10 x 24 x 52	YES
LS4247	4 STEP	38"	44 lbs.	24 x 30	10 x 24 x 65	YES*
LS32410	3 STEP	28.5"	46 lbs.	24 x 28	14 x 24 x 62	YES*
LS42410	4 STEP	38"	52 lbs.	24 x 35	14 x 24 x 72	YES*

Now Available in Aluminum See Page 15 *Climb it, Roll it, Fold it & Store it!*



LS3247
LOCK-N-STOCK



LS42410
MODIFIED LOCK-N-STOCK



No Hinge to Break!

• Heavy duty rated for 350 lbs.

- Welded construction
- 16" wide perforated steps
- Standard Lock-n-Stock folds to approx. 10" deep, modified Lock-n-Stock folds to approx. 14" deep for easy storage
- Locks in the folded or climbing position
- Easy to maneuver in the open or closed positions
- Blue powder coat finish
- Built to ANSI standards



M-2000 SERIES ROLLING SAFETY LADDERS

- **450 LB. CAPACITY**
- Easy to use foot-pedal activated lockstep
- High quality casters with bearing and dust cover
- 14" deep top step
- Ships unassembled for freight savings
- Available fully assembled, specify (SU) set-up
- Specify tread type when ordering
- Rigid 1" OD tubing
- 30" high handrails
- 21" & 28" deep top step available (see below)
- Available with rear guardrail removed for walk through
- Gray powder coat finish
- Built to OSHA and ANSI standards
- CAL OSHA available



**14" DEEP
TOP STEP**

**Ballymore's
Component Design
with Replaceable
Parts!**

**EXTEND LADDER LIFE AND
UTILITY. LOCKSTEPS, HAND-
RAILS, BASE FRAMES AND REAR
VERTICALS CAN BE REPLACED.**

# OF STEPS INCLUDING TOP STEP	HEIGHT INCHES		MODEL #	BASE W" x L"	WGT Lbs.
	TOP STEP	OVER ALL			
16" WIDE STEP WITH 24" WIDE BASE					
5 STEP	50"	83"	052414	24 x 43	91
6 STEP	60"	93"	062414	24 x 49	100
7 STEP	70"	103"	072414	24 x 55	109
8 STEP	80"	113"	082414	24 x 61	127
24" WIDE STEP WITH 32" - 40" WIDE BASE					
5 STEP	50"	83"	053214	32 x 43	110
6 STEP	60"	93"	063214	32 x 49	122
7 STEP	70"	103"	073214	32 x 55	143
8 STEP	80"	113"	083214	32 x 61	160
9 STEP	90"	123"	093214	32 x 68	175
10 STEP	100"	133"	103214	32 x 74	193
11 STEP	110"	143"	113214	32 x 80	205
12 STEP	120"	153"	123214	32 x 87	220
13 STEP*	130"	175"	134014	40 x 94	250
14 STEP*	140"	185"	144014	40 x 100	280
15 STEP*	150 "	195"	154014	40 x 106	310

*Must be skidded. See price sheet for skidding cost.

**Specify
Tread
Type
when
ordering**



Abrasive Mat Tread (R)



Perforated Tread (P)



Expanded Metal Tread (X)



Heavy Duty Serrated Grating (G)

CALL FOR PRICING: (800) 762-8327 OR VISIT OUR WEBSITE: WWW.BALLYMORE.COM

M-2000 SERIES DEEP TOP STEP LADDERS

- **450 LB. CAPACITY**
- All features of the standard M-2000 line with a 21" or 28" Deep Top Step to provide a larger and more comfortable work space
- Available with rear guardrail removed for walk through
- Side exit available on 28" deep top step models



**21" OR 28"
DEEP TOP
STEP**

**Features choice of
21" or 28" deep top step**

# OF STEPS INCLUDING TOP STEP	HEIGHT INCHES		21" DEEP TOP STEP			28" DEEP TOP STEP		
	TOP STEP	OVER ALL	MODEL #	BASE W" x L"	WGT Lbs.	MODEL #	BASE W" x L"	WGT Lbs.
16" WIDE STEP 24" WIDE BASE								
5 STEP	50	83	052421	24 x 50	102	052428	24 x 57	113
6 STEP	60	93	062421	24 x 56	111	062428	24 x 63	122
7 STEP	70	103	072421	24 x 62	120	072428	24 x 69	131
8 STEP	80	113	082421	24 x 68	138	082428	24 x 75	149
24" WIDE STEP 32" - 40" W BASE								
5 STEP	50	83	053221	32 x 50	121	053228	32 x 57	132
6 STEP	60	93	063221	32 x 56	133	063228	32 x 63	144
7 STEP	70	103	073221	32 x 62	154	073228	32 x 69	165
8 STEP	80	113	083221	32 x 68	171	083228	32 x 75	182
9 STEP	90	123	093221	32 x 75	186	093228	32 x 82	197
10 STEP	100	133	103221	32 x 81	204	103228	32 x 88	215
11 STEP	110	143	113221	32 x 87	216	113228	32 x 94	227
12 STEP	120	153	123221	32 x 94	231	123228	32 x 101	242
13 STEP*	130	175	134021	40 x 101	261	134028	40 x 108	272
14 STEP*	140	185	144021	40 x 107	291	144028	40 x 115	302
15 STEP*	150	195	154021	40 x 113	321	154028	40 x 120	332

MOVES Laterally TO FIT IN TIGHT CORNERS AND CLOSE TO SHELVES

# OF STEPS INCLUDING TOP STEP	HEIGHT INCHES				
	TOP STEP	OVER ALL	MODEL #	BASE W" x L"	WGT Lbs.
16" WIDE STEP					
6 STEP	60	93	PIP-6	24 x 49	110
7 STEP	70	103	PIP-7	24 x 55	125
8 STEP	80	113	PIP-8	24 x 61	140
24" WIDE STEP					
6 STEP	60	93	PIP-6-32	32 x 49	133
7 STEP	70	103	PIP-7-32	32 x 55	154
8 STEP	80	113	PIP-8-32	32 x 61	171
9 STEP	90	123	PIP-9	32 x 68	186
10 STEP	100	133	PIP-10	32 x 74	204
11 STEP	110	143	PIP-11	32 x 80	216
12 STEP	120	153	PIP-12	32 x 87	231



POWDER COATED
TOUGH™
14" DEEP TOP STEP

ALL DIRECTION ROLLING LADDERS

- 450 LB. CAPACITY
- Turns in its own radius
- 14" deep top step
- Easy to use foot-pedal activated lockstep
- Gray powder coat finish
- Built to meet or exceed OSHA and ANSI standards
- CAL OSHA available
- SHIPS KD to reduce freight costs
- Available assembled, specify (SU) set-up
- Specify tread type when ordering
- (X) Expanded Metal Standard
- (P) Perforated
- (R) Abrasive Mat
- (G) Heavy Duty Serrated Grating

*Designed for
Easy & Fast
Assembly*

All-Directional System



Rolls on 4 swivel casters allowing ladders to move in **ALL DIRECTIONS** - even laterally! Rigid rear casters easily transition between floor types.

SHIPS KD IN A BOX:

- Minimizes risk of freight damage
- Lowers shipping costs
- Boxes stack easily allowing cost effective stocking of ladders

***Ballymore's
Patented Bolt-in
Top Step Ladders
Ship Boxed!***

FOR CUSTOM ENGINEERED ELEVATION


SOLUTIONS CALL: (800) 762-8327

Unique Patented Design & Engineering

Easily maneuverable and designed to provide easy access to narrow aisles and tight spaces. A safer option to "A" frame ladders, the Navigator includes handrails and a more gradual climbing slope. The patented weight actuated lockstep gives the ladder a very secure feel when climbing. Designed to provide increased Safety, reducing accidents and worker's compensation claims.

# OF STEPS INCLUDING TOP STEP	Height Inches		MODEL #	BASE W" x L"	WGT Lbs.
	TOP STEP	OVER ALL			
THE NAVIGATOR	WITH STANDARD FIXED SIDE RAILS				
7 STEP	70	103	NAV-7RS	26 x 51	160
8 STEP	80	113	NAV-8RS	26 x 57	176
9 STEP	90	123	NAV-9RS	26 x 63	192
10 STEP	100	133	NAV-10RS	26 x 69	210
THE NAVIGATOR	WITH FOLDING SIDE RAILS				
9 STEP	90	123	NAV-9RF	26 x 63	192
10 STEP	100	133	NAV-10RF	26 x 69	210

*Shown with
Folding
Rails*

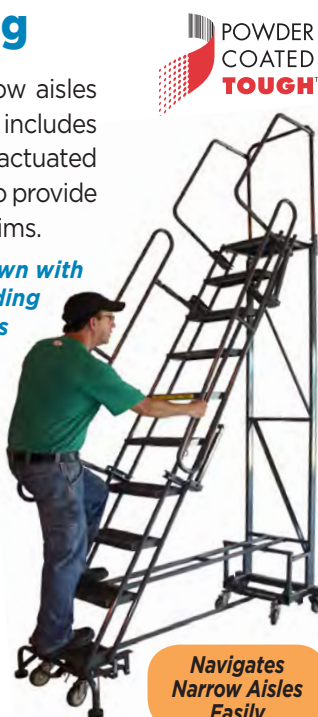

***Navigates
Narrow Aisles
Easily***

THE NAVIGATOR ALL DIRECTION ROLLING LADDER

- 450 LB. CAPACITY
- 14" deep top step
- Available 7-10 Steps
- All Directional maneuverability
- Patented weight actuated lockstep
- Standard fixed rails or folding side rails
- Specify tread type when ordering
- Ships KD in a box
- Available fully assembled, specify (SU) set-up
- Gray powder coat finish
- Meets OSHA and ANSI;
- CAL OSHA available

50° SLOPE WALK DOWN LADDER

- **450 LB. CAPACITY**
- 50° stairway slope allows easier climbing and descent
- Foot pedal activated lockstep
- 14" deep top step standard
- 21" and 28" deep top steps available
- Specify tread type when ordering
- Ships KD for freight savings
- Available fully assembled, specify (SU) set-up
- Available with rear guardrail removed for walk through
- Gray powder coat finish
- Meets OSHA & ANSI standards
- CAL OSHA available

HEAVY DUTY STAIRWAY SLOPE LADDER

- **HEAVY DUTY - RUGGED 600 LBS. CAPACITY**
- 50° stairway slope allows easier climbing and descent
- 14" deep Top Step for added comfort & safety
- 10" deep intermediate steps
- 21" and 28" deep top steps are available
- Easy operating lockstep secures ladder to the floor
- Gray powder coat finish
- All direction option available
- Available with rear guardrail removed for walk through
- Gray powder coat finish
- Meets OSHA & ANSI standards
- CAL OSHA available

LADDER REPLACEMENT PARTS & OPTIONS



14" DEEP
TOP STEP

**More
Gradual
Slope**



Available with
ALL DIRECTIONAL OPTION

Recommended on all 10, 11 & 12 step models

# OF STEPS INCLUDING TOP STEP	TOP STEP	OVER ALL	MODEL #	BASE W" x L"	WGT Lbs.
16" WIDE STEP					
5 STEP	50"	83"	SW524	24 x 51	96
6 STEP	60"	93"	SW624	24 x 59	109
7 STEP	70"	103"	SW724	24 x 68	122
8 STEP	80"	113"	SW824	24 x 76	135
24" WIDE STEP					
5 STEP	50"	83"	SW532	32 x 51	115
6 STEP	60"	93"	SW632	32 x 59	120
7 STEP	70"	103"	SW732	32 x 68	139
8 STEP	80"	113"	SW832	32 x 76	165
9 STEP	90"	123"	SW932	32 x 84	180
10 STEP	100"	133"	SW1032	32 x 92	200
11 STEP	110"	143"	SW1132	32 x 101	210
12 STEP	120"	153"	SW1232	32 x 109	230

AVAILABLE TREAD TYPE OPTIONS:

(P) Perforated (Standard)

(R) Abrasive Mat

(G) Heavy Duty Serrated Grating

(X) Expanded Metal



21" or 28"
DEEP TOP
STEP

**Base Frame & Rear
Vertical Rugged
2" X 1" Tubing**



# OF STEPS INCLUDING TOP STEP	HEIGHT INCHES TOP STEP	OVER ALL	MODEL #	BASE W" x L"	WGT Lbs.
5 STEP	50"	83"	HDS-5	32 x 50	132
6 STEP	60"	93"	HDS-6	32 x 58	152
7 STEP	70"	103"	HDS-7	32 x 66	178
8 STEP	80"	113"	HDS-8	32 x 74	204
9 STEP	90"	123"	HDS-9	32 x 82	227
10 STEP	100"	133"	HDS-10	32 x 90	245
11 STEP	110"	143"	HDS-11	32 x 98	278
12 STEP	120"	153"	HDS-12	32 x 106	297

**Ballymore's
Component Design
with Replaceable
Parts!**

AVAILABLE TREAD TYPES:

(P) Perforated (Standard)

(G) Heavy Duty Serrated Grating

(R) Abrasive Mat

(X) Expanded Metal

PLEASE SPECIFY WHEN ORDERING

**Optional Replaceable
SKID PLATE FOR
ROUGH SURFACES**



Ladder Shelves & Trays

- Hanging Shelf
- Hanging Tray

PART #	DESCRIPTION	# PER SET
*PR-2	2" Replacement Casters Sets	4
*PR-3	3" Replacement Casters Sets	4
PS	Replacement Springs	4
PTHDS	Replacement Rubber Tips	4
SBR-4	4" Replacement Casters Sets	4
FW-2	10" Rubber Wheels	2
DONUTS ...	2.5" Donut Style Pads	2

Rear Exit or Side Exit Available

- 28" deep top step required for Side Exit
- Confirm freight classification & packing charge
- Not available on ladders with spring loaded casters
- See price list for cost

*Must specify # of steps and width (Set includes casters, springs, rubber tips and hardware)

Monster Line Rolling Safety Ladder • Most Heavy-Duty Rolling Ladder in the Industry

# OF STEPS INCLUDING TOP STEP	HEIGHT INCHES		MODEL #	BASE W" x L"	WGT Lbs.
	TOP STEP	OVER ALL			
6 STEP	60"	93"	ML063221	32" x 56"	165
7 STEP	70"	103"	ML073221	32" x 62"	189
8 STEP	80"	113"	ML083221	32" x 68"	209
9 STEP	90"	123"	ML093221	32" x 75"	227
10 STEP	100"	133"	ML103221	32" x 81"	248
11 STEP	110"	143"	ML113221	32" x 87"	263
12 STEP	120"	153"	ML123221	32" x 94"	281
13 STEP	130"	175"	ML134021	40" x 101"	314
14 STEP	140"	185"	ML144021	40" x 107"	347
15 STEP	150"	195"	ML154021	40" x 113"	380

Base Frame & Rear Vertical Rugged 2" x 1" Rectangular Tubing • 21" Deep Top Step Standard • Patented Weight Actuated Lockstep
Specify alternate tread when ordering.



Perforated Tread (P)



Expanded Metal Tread (X)



Heavy Duty Serrated Grating (G)



Base Frame & Rear Vertical Rugged 2" x 1" Tubing

21" DEEP TOP STEP



MONSTER LINE LADDERS

Extra Heavy Duty 600 Lb. Capacity!

- Patented Weight Actuated Lockstep
- Rugged 2" x 1" Rectangular tubing base frame and rear vertical
- 21" deep top step
- 59 degree slope
- 24" wide steps standard
- High quality non marking wheels w/roller bearings and dust cover
- Rear corner bumpers - standard
- All-Directional option available
- Gray powder coat finish
- Available w/o rear guard - rail for easy walk through
- Exceeds OSHA & ANSI standards
- CAL OSHA available
- Certified in Canada

FOR PRICING CALL : (800) 762-8327 OR VISIT WWW.BALLYMORE.COM

EXTEND LADDER LIFE AND UTILITY. Locksteps, handrails, base frames & rear verticals can be replaced. Many parts ship by UPS so your ladders can be back in service quickly.

Ballymore's Component Design with Replaceable Parts!

# OF STEPS INCLUDING TOP STEP	Height Inches		MODEL #	BASE W" x L"	WGT Lbs.
	TOP STEP	OVER ALL			
16" WIDE TREAD 14" Deep Top Step					
6 STEP	60	93	SPL-6-14N	24 x 49	80
7 STEP	70	103	SPL-7-14N	24 x 55	89
8 STEP	80	113	SPL-8-14N	24 x 61	120
16" WIDE TREAD 21" Deep Top Step					
6 STEP	60	93	SPL-6-N	24 x 56	91
7 STEP	70	103	SPL-7-N	24 x 62	100
8 STEP	80	113	SPL-8-N	24 x 68	131
24" WIDE TREAD 14" Deep Top Step					
6 STEP	60	93	SPL-6-14	32 x 49	150
7 STEP	70	103	SPL-7-14	32 x 55	166
8 STEP	80	113	SPL-8-14	32 x 61	205
9 STEP	90	123	SPL-9-14	32 x 68	215
10 STEP	100	133	SPL-10-14	32 x 74	225
11 STEP	110	143	SPL-11-14	32 x 80	235
12 STEP	120	153	SPL-12-14	32 x 87	250
24" WIDE TREAD 21" Deep Top Step					
6 STEP	60	93	SPL-6	32 x 56	160
7 STEP	70	103	SPL-7	32 x 62	176
8 STEP	80	113	SPL-8	32 x 68	215
9 STEP	90	123	SPL-9	32 x 75	225
10 STEP	100	133	SPL-10	32 x 81	235
11 STEP	110	143	SPL-11	32 x 87	245
12 STEP	120	153	SPL-12	32 x 94	260



Combines the benefits of a rolling safety ladder and a stock-picking cart!



STOCK PICKING ROLLING LADDERS

- **COMBINED 600 LBS. CAPACITY**
 - 450 lbs. Max for ladder
 - 300 lbs. Max for shelves
- Combines the benefits of a rolling safety ladder and a stock-picking cart
- 16" or 24" wide steps
- 14" or 21" deep top step
- Sturdy Stock Shelves:
 - 2 shelves on 6 - 7 step models
 - 3 shelves on 8 - 12 step models
- Specify Tread Type when Ordering Ladders
- Gray powder coat finish
- CAL OSHA available
- Ships unassembled & boxed to reduce freight costs
- Built to OSHA & ANSI standards

PLEASE SPECIFY TREAD TYPE WHEN ORDERING LADDERS



PATENTED WEIGHT ACTUATED LOCKSTEP LADDERS

Features:

- **450 LB. CAPACITY**
- This state of the art lockstep has one pedal which lifts the ladder into the rolling position
- As you climb the ladder your weight activates the lockstep - securing the ladder to the floor in the climbing position
- Available in 59° Ladder Slope or 50° Stairway Slope
- 14" deep top step standard 21" and 28" available
- Durable: manufactured with 1" OD tubing
- Built to OSHA and ANSI standards
- Gray powder coat finish
- CAL OSHA available



14" DEEP
TOP STEP



59°
Slope
Ladder



Think Safety... Buy Weight Actuated. The Patented Lockstep from Ballymore

# OF STEPS INCLUDING TOP STEP	HEIGHT INCHES		MODEL #	BASE W" x L"	WGT Lbs.
	TOP STEP	OVER ALL			
16" WIDE STEP					
5 STEP	50"	83"	WA052414	24 x 43	91
6 STEP	60"	93"	WA062414	24 x 49	100
7 STEP	70"	103"	WA072414	24 x 55	109
8 STEP	80"	113"	WA082414	24 x 61	127
24" WIDE STEP					
5 STEP	50"	83"	WA053214	32 x 43	110
6 STEP	60"	93"	WA063214	32 x 49	122
7 STEP	70"	103"	WA073214	32 x 55	143
8 STEP	80"	113"	WA083214	32 x 61	160
9 STEP	90"	123"	WA093214	32 x 68	175
10 STEP	100"	133"	WA103214	32 x 74	193
11 STEP	110"	143"	WA113214	32 x 80	205
12 STEP	120"	153"	WA123214	32 x 87	220
13 STEP	130"	175"	WA134014	40 x 94	250
14 STEP	140"	185"	WA144014	40 x 100	280
15 STEP	150"	195"	WA154014	40 x 106	310

SPECIFY TREAD TYPE WHEN ORDERING:



Perforated Tread
(P)



Expanded Metal Tread
(X)



Heavy Duty Serrated
Grating (G)



Abrasive Mat Tread
(R)

CALL FOR PRICING: (800) 762-8327 OR VISIT OUR WEBSITE: WWW.BALLYMORE.COM

PATENTED WEIGHT ACTUATED LOCKSTEP



THE MOST DURABLE LOCK STEP ON THE MARKET TODAY!

Designed using finite element analysis, then robotically tested. Prototypes achieved over 60,000 cycles before replacing latch hook. **Then 60,000 more cycles!**



Apply 70 pounds of pressure to the steps & the ladder automatically drops the front feet to the ground securing the ladder to the floor for safe climbing.



Single pedal easily lifts ladder into the rolling position.

Patent No.: US 7,841,447 B2

**BUY
WEIGHT
ACTUATED
FOR INCREASED
SAFETY AND
STABILITY**

ANOTHER EXCLUSIVE BALLYMORE INNOVATION:

Ballymore engineered its patented weight actuated lock step to provide an easy, safe and reliable mechanism to secure rolling ladders to the floor to ensure safe climbing and descent. Ladders equipped with our weight actuated lockstep lock to the ground

when worker steps on any step of the ladder and applies just 70 lbs of pressure. The weight actuated lockstep is designed to prevent accidents caused by a ladder being rolled or moved while another worker is on the top platform.

**WHEN SAFETY COUNTS,
COUNT ON BALLYMORE.**

Weight Actuated Lockstep combined with All Directional Maneuverability

# OF STEPS INCLUDING TOP STEP	Height Inches		MODEL #	BASE W" x L"	WGT Lbs.
	TOP STEP	OVER ALL			
16" WIDE STEP					
5 STEP	50"	83"	WA-AD-052414	24 x 43	91
6 STEP	60"	93"	WA-AD-062414	24 x 49	100
7 STEP	70"	103"	WA-AD-072414	24 x 55	109
8 STEP	80"	113"	WA-AD-082414	24 x 61	127
24" WIDE STEP					
5 STEP	50"	83"	WA-AD-053214	32 x 43	110
6 STEP	60"	93"	WA-AD-063214	32 x 49	122
7 STEP	70"	103"	WA-AD-073214	32 x 55	143
8 STEP	80"	113"	WA-AD-083214	32 x 61	160
9 STEP	90"	123"	WA-AD-093214	32 x 68	175
10 STEP	100"	133"	WA-AD-103214	32 x 74	193
11 STEP	110"	143"	WA-AD-113214	32 x 80	205
12 STEP	120"	153"	WA-AD-123214	32 x 87	220
13 STEP	130"	175"	WA-AD-134014	40 x 94	250
14 STEP	140"	185"	WA-AD-144014	40 x 100	280
15 STEP	150"	195"	WA-AD-154014	40 x 106	310

SPECIFY TREAD TYPE WHEN ORDERING:

- (R) Abrasive Mat
(X) Expanded Metal
(P) Perforated
(G) Heavy Duty Serrated Grating

All-Directional Caster System



Weight Actuated Lockstep




Patent No.: US 7,841,447 B2

FOR CUSTOM ENGINEERED SOLUTIONS • CALL: (800) 762-8327

# OF STEPS INCLUDING TOP STEP	Height Inches		All Directional MODEL #	BASE W" x L"	WGT Lbs.
	TOP STEP	OVER ALL			
16" WIDE STEP					
5 STEP	50"	83"	WA-AD-SW-052414	24 x 50	96
6 STEP	60"	93"	WA-AD-SW-062414	24 x 58	109
7 STEP	70"	103"	WA-AD-SW-072414	24 x 66	122
8 STEP	80"	113"	WA-AD-SW-082414	24 x 74	135
24" WIDE STEP					
5 STEP	50"	83"	WA-AD-SW-053214	32 x 50	115
6 STEP	60"	93"	WA-AD-SW-063214	32 x 58	120
7 STEP	70"	103"	WA-AD-SW-073214	32 x 66	139
8 STEP	80"	113"	WA-AD-SW-083214	32 x 74	165
9 STEP	90"	123"	WA-AD-SW-093214	32 x 82	180
10 STEP	100"	133"	WA-AD-SW-103214	32 x 90	200
11 STEP	110"	143"	WA-AD-SW-113214	32 x 98	210
12 STEP	120"	153"	WA-AD-SW-123214	32 x 106	230

SPECIFY TREAD TYPE WHEN ORDERING:

- (P) Perforated (R) Abrasive Mat
(G) Heavy Duty Serrated Grating (X) Expanded Metal

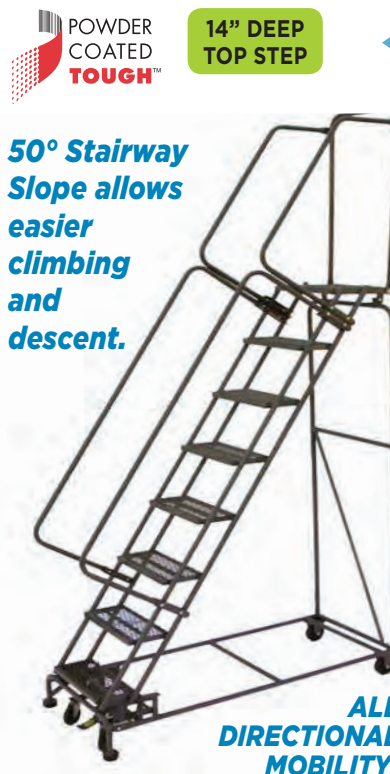

WEIGHT ACTUATED ALL DIRECTION LOCKSTEP LADDERS

- **450 LB. CAPACITY!**
- Patented lockstep - most durable in the industry, with All Direction Option
- Rolls on 4 swivel casters allowing ladder to move in all directions
- Your weight activates lockstep, locking ladder to the floor in the climbing position
- Standard 14" deep top step, 21" & 28" top step available
- Durable 1" O.D. steel tubing
- Gray powder coat finish
- Built to meet OSHA and ANSI standards
- CAL OSHA available

WEIGHT ACTUATED 50° STAIRWAY SLOPE OPTION LOCKSTEP LADDERS

- **450 LB. CAPACITY**
- Patented lockstep - most durable in the industry
- Your weight activates the lockstep as you climb, locking ladder to the floor in the climbing position
- 50° stairway slope allows easier climbing and descent
- Standard 14" deep top step, 21" & 28" top step available
- Durable 1" O.D. steel tubing
- Gray powder coat finish
- Available w/Rear Guard rail removed for easy walk through
- OSHA and ANSI standards
- CAL OSHA available

TILT & ROLL LADDERS

- 450 LB. CAPACITY
- Balanced design allows ladder to tilt easily and roll effortlessly on two 4" large wheels
- 16" or 24" wide steps
- Specify tread type when ordering
- Ships unassembled in a box
- Fully assembled ladders available - specify (SU)
- Gray powder coat finish
- Built to OSHA and ANSI Standards



Non Straddle Base
Model #TR-4

Straddle Base
Model #HL-4

# OF STEPS INCLUDING TOP STEP	Height Inches		TILT & ROLL MODEL #	BASE W" x L"	WEIGHT Lbs.	Extra Features
	TOP STEP	OVER ALL				
TR-24" WIDE STEP						
2 STEP	20	53	TR-2	30 x 34	50	WITH TR 20"DEEP TOP STEP
3 STEP	30	63	TR-3	30 x 40	60	
4 STEP	40	73	TR-4	30 x 46	72	
5 STEP	50	83	TR-5	30 x 52	84	
6 STEP	60	93	TR-6	30 x 58	96	
HL-24" WIDE STEP						
2 STEP	20	53	HL-2NS	26 x 32	65	WITH STRADDLE BASE
3 STEP	30	63	HL-3NS	26 x 38	77	
4 STEP	40	73	HL-4NS	26 x 44	89	
5 STEP	50	83	HL-5NS	26 x 50	101	
6 STEP	60	93	HL-6NS	26 x 56	113	
16" WIDE STEP						
2 STEP	19	49	H218TR	20 x 24	36	SHIPS BOXED UNASSEMBLED
3 STEP	28.5	58.5	H318TR	20 x 30	45	
4 STEP	38	68	H418TR	20 x 36	56	
24" WIDE STEP						
2 STEP	19	49	H226TR	30 x 24	42	
3 STEP	28.5	58.5	H326TR	30 x 30	50	
4 STEP	38	68	H426TR	30 x 36	65	
16" WIDE STEP						
4 STEP	40	73	FSTR418	20 x 40	68	SHIPS BOXED UNASSEMBLED
5 STEP	50	83	FSTR518	20 x 47	75	
6 STEP	60	93	FSTR618	24 x 54	83	
TR-24" WIDE STEP						
4 STEP	40	73	FSTR426	30 x 40	80	
5 STEP	50	83	FSTR526	30 x 47	87	
6 STEP	60	93	FSTR626	30 x 54	98	

BALANCED DESIGN EASILY TILTS AND ROLLS



SHIPS BOXED

- Lowers shipping costs
- Minimizes freight damage risk
- Boxes stack easily allowing cost effective stocking of ladders

SPECIFY TREAD TYPE WHEN ORDERING:

- (X) Expanded Metal
- (P) Perforated
- (G) Heavy Duty Serrated Grating

FOR PRICING CALL: (800) 762-8327 • WWW.BALLYMORE.COM

FOLD & STORE LADDERS

- 350 LB. CAPACITY
- Can be easily folded for storage or transportation
- Tilt and roll mobility
- Large 10" rubber wheels roll easily on rough surfaces
- 14" deep top step
- Ships un-assembled
- Built to OSHA and ANSI standards



MODEL #FAWL-6



# OF STEPS INCLUDING TOP STEP	HEIGHT INCHES		MODEL #	BASE W" x L"	WGT Lbs.
	TOP STEP	OVER ALL			
5 STEP	50"	83"	FAWL-5	30 x 46	90
6 STEP	60"	93"	FAWL-6	30 x 52	100
7 STEP	70"	103"	FAWL-7	30 x 58	110
8 STEP	80"	113"	FAWL-8	30 x 64	120
9 STEP	90"	123"	FAWL-9	30 x 70	135
10 STEP	100"	133"	FAWL-10	30 x 76	148
11 STEP	110"	143"	FAWL-11	30 x 82	165
12 STEP	120"	153"	FAWL-12	30 x 88	175

SPECIFY TREAD TYPE WHEN ORDERING:

- (X) Expanded Metal
- (P) Perforated
- (G) Heavy Duty Serrated Grating



Optional Replaceable
SKID PLATE FOR
ROUGH SURFACES

Can be easily folded for storage or transport.
Easy tilt & roll mobility



Heavy Duty Mobile Work Platforms increase productivity by simplifying maintenance operations.

- Designed to accommodate two workers.
- Also available in aluminum and stainless steel.
- **Add platform length to model # when ordering**



Available with left, right, or rear exit!



HEAVY DUTY MOBILE WORK PLATFORMS

• **RUGGED 2" X 1" RECTANGULAR TUBING BASE FRAME & REAR VERTICAL WELDMENT**

- **800 LB. CAPACITY**
- Also available in aluminum and stainless steel
- Sturdy 1" tubular steel rails
- Self cleaning slip resistant serrated grating
- Easy to use heavy duty pedal activated lockstep with large 4" casters
- 36" high handrails with midrail
- Meets OSHA and ANSI requirements
- Gray powder coat finish
- Ships unassembled in a box

Available in standard and stairway slope

• **RUGGED 2" X 1" RECTANGULAR TUBING BASE FRAME & REAR VERTICAL WELDMENT**

- **800 LB. CAPACITY**
- Self cleaning slip resistant serrated grating
- Easy to use heavy duty pedal activated lockstep with large 4" casters
- 36" high handrails with midrail
- Meets OSHA and ANSI requirements

SINGLE ENTRY WORK PLATFORMS

MODEL WITHOUT HANDRAILS				36" PLATFORM		48" PLATFORM		60" PLATFORM		72" PLATFORM	
STEPS	PLATFORM HEIGHT	PLATFORM WIDTH	MODEL #	WEIGHT	BASE W" x D"	WEIGHT	BASE W" x D"	WEIGHT	BASE W" x D"	WEIGHT	BASE W" x D"
3 STEP	30"	24"	SNR3-24	105	33 x 48	127	33 x 60	149	33 x 72	171	33 x 84
3 STEP	30"	36"	SNR3-36	121	38 x 48	143	38 x 60	150	38 x 72	187	38 x 84
4 STEP	40"	24"	SNR4-24	121	33 x 54	143	33 x 66	165	33 x 78	187	33 x 90
4 STEP	40"	36"	SNR4-36	138	38 x 54	160	38 x 66	182	38 x 78	204	38 x 90
MODEL WITH HANDRAILS				36" PLATFORM		48" PLATFORM		60" PLATFORM		72" PLATFORM	
STEPS	PLATFORM HEIGHT	PLATFORM WIDTH	MODEL #	WEIGHT	BASE W" x D"	WEIGHT	BASE W" x D"	WEIGHT	BASE W" x D"	WEIGHT	BASE W" x D"
3 STEP	30"	24"	SEP3-24	136	33 x 48	151	33 x 60	172	33 x 72	193	33 x 84
3 STEP	30"	36"	SEP3-36	153	38 x 48	178	38 x 60	202	38 x 72	226	38 x 84
4 STEP	40"	24"	SEP4-24	151	33 x 54	165	33 x 66	186	33 x 78	207	33 x 90
4 STEP	40"	36"	SEP4-36	167	38 x 54	193	38 x 66	217	38 x 78	240	38 x 90
5 STEP	50"	24"	SEP5-24	165	33 x 60	178	33 x 72	199	33 x 84	220	33 x 96
5 STEP	50"	36"	SEP5-36	182	38 x 60	206	38 x 72	230	38 x 84	253	38 x 96
6 STEP	60"	24"	SEP6-24	178	33 x 66	193	33 x 78	215	33 x 90	237	33 x 102
6 STEP	60"	36"	SEP6-36	198	38 x 66	220	38 x 78	245	38 x 90	270	38 x 102
7 STEP	70"	24"	SEP7-24	193	33 x 73	209	33 x 85	230	33 x 97	251	33 x 108
7 STEP	70"	36"	SEP7-36	215	38 x 73	237	38 x 85	273	38 x 97	308	38 x 108

DOUBLE ENTRY MOBILE WORK PLATFORMS

Extra Heavy Duty 800 Lb. Capacity!



DOUBLE ENTRY WORK PLATFORMS


				36" PLATFORM		48" PLATFORM		60" PLATFORM		72" PLATFORM	
STEPS	PLATFORM HEIGHT	PLATFORM WIDTH	MODEL #	WEIGHT	BASE W" x D"	WEIGHT	BASE W" x D"	WEIGHT	BASE W" x D"	WEIGHT	BASE W" x D"
3 STEP	30"	24"	DEP3-24	202	33 x 60	220	33 x 72	240	33 x 84	260	33 x 96
3 STEP	30"	36"	DEP3-36	226	38 x 60	242	38 x 72	262	38 x 84	282	38 x 96
4 STEP	40"	24"	DEP4-24	227	33 x 73	245	33 x 85	285	33 x 97	284	33 x 108
4 STEP	40"	36"	DEP4-36	248	38 x 73	264	38 x 85	289	38 x 97	306	38 x 108
5 STEP	50"	24"	DEP5-24	251	33 x 85	271	33 x 97	311	33 x 109	308	33 x 121
5 STEP	50"	36"	DEP5-36	270	38 x 85	292	38 x 97	314	38 x 109	330	38 x 121
6 STEP	60"	24"	DEP6-24	276	33 x 98	295	33 x 110	333	33 x 121	332	33 x 133
6 STEP	60"	36"	DEP6-36	297	38 x 98	314	38 x 110	334	38 x 121	352	38 x 133
7 STEP	70"	24"	DEP7-24	300	33 x 110	319	33 x 122	339	33 x 134	356	33 x 146
7 STEP	70"	36"	DEP7-36	319	38 x 110	341	38 x 122	362	38 x 134	380	38 x 146

HEAVY DUTY ADJUSTABLE HEIGHT STEEL WORK PLATFORMS

For Custom Platform, Ladder or Lift Solutions Call Today: 800-762-8327

- **Heavy Duty 500 lb. Capacity**
- Simply turn feet to adjust height
- Gray Powder Coat Finish
- Slip resistant heavy duty serrated grating

- Place several units together to create larger work areas
- Provide shorter workers with a more comfortable work position
- Heavy duty serrated grating provides excellent slip resistance
- Platforms 24" - 48" long, have 4 legs, longer platforms have 6 legs

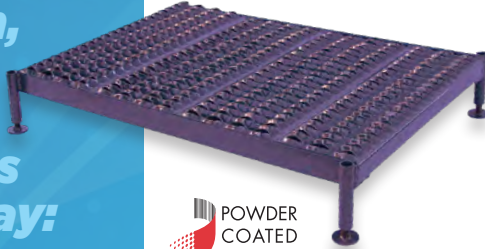

Make Uneven Surfaces Level

HEIGHTS from 5" to 8"			HEIGHTS from 9" to 14"	
MODEL #	W" x L"	Weight	MODEL #	W" x L"
AWP5-2424	24 x 24	38	AWP9-2424	24 x 24
AWP5-2436	24 x 36	52	AWP9-2436	24 x 36
AWP5-2448	24 x 48	66	AWP9-2448	24 x 48
AWP5-2459	24 x 59	80	AWP9-2459	24 x 59
AWP5-2471	24 x 71	106	AWP9-2471	24 x 71
AWP5-2497	24 x 97	138	AWP9-2497	24 x 97

Heavy Duty Fork Deck



- Rugged steel construction
- Non-skid platform
- 42" high rails with midrails, 4" toeboards & locking gate
- 60" high screen shields operator from fork lift mast
- Safety chain secures platform to mast
- 2" x 7" fork pockets mounted on 29" centers
- 4" swivel casters on base for easy positioning
- Safety orange powder coat
- Ships boxed, easy assembly
- ANSI B56.10 standards

Extra Heavy Duty 1,000 Lb. Capacity!



MODEL	L" X W"	WEIGHT
FD-O-C	36" x 36"	135
FD-48-C	48" x 36"	157
FD-40-48	40" x 48"	164
OPTIONAL ACCESSORIES		
Fluorescent Bulb Caddy		26
Tool Tray (Bolt on or Hang on)		14
All welded available		-

• Ships Boxed for Freight Savings & Quick, Easy Assembly

FORK DECK MAINTENANCE PLATFORM

- **1,000 lb. CAPACITY**
- Turn your fork truck into a personnel lift. Safe and economical access to heights above those reached by rolling ladders.

TRUCK/DOCK ACCESS LADDERS

- **450 lb. CAPACITY**
- Ideal for accessing trucks or loading docks
- 21" deep top step
- 10" rear rubber wheels - Great on parking lots or rough surfaces
- Gray powder coat finish
- Built to OSHA and ANSI standards

- Rugged 2" x 1" rectangular tubing base frame and rear vertical
- Heavy duty serrated grating step tread
- Lightweight - lift and roll wheelbarrow portability

- Available in both 59° ladder slope or gradual 50° stairway slope
- No Rear Guardrail standard for easy walk through (includes snap chain)



LADDER SLOPE 59°					
MODEL #	TOP STEP HEIGHT	OVERALL HEIGHT	STEP WIDTH	BASE W" x L"	WEIGHT LBS.
TA-5-24	50"	80"	24"	32" x 53"	145
TA-5-36	50"	80"	36"	44" x 53"	170
STAIRWAY LADDER SLOPE 50 DEGREE					
SW-TA-5-24	50"	80"	24"	32" x 60"	155
SW-TA-5-36	50"	80"	36"	44" x 60"	180

Corrosion Resistant • Light Weight • Aluminum Rolling Ladders

Aluminum ladders are lightweight, weather resistant, durable & easy to transport, with noncorrosive properties that make them the ideal choice for many applications in both outdoor and indoor environments.

# OF STEPS INCLUDING TOP STEP	Height Inches		SPRING LOADED CASTERS MODEL #	TILT & ROLL MODEL #	BASE W" x L"	WGT Lbs.
	TOP STEP	OVER ALL				
18" WIDE STEPS						
2 STEP NO RAILS	19	19	A2S*	-	20 x 19	15
3 STEP NO RAILS	28.5	28.5	A3S*	-	20 x 25	20
4 STEP NO RAILS	38	38	A4S	-	20 x 31	29
2 STEP	19	49	A2SH	A2SH-TR	20 x 19	21
3 STEP	28.5	58.5	A3SH	A3SH-TR	20 x 25	27
4 STEP	38	68	A4SH	A4SH-TR	20 x 31	34
24" WIDE STEPS						
2 STEP NO RAILS	19	19	A2S30*	-	30 x 19	22
3 STEP NO RAILS	28.5	28.5	A3S30	-	30 x 25	28
4 STEP NO RAILS	38	38	A4S30	-	30 x 31	35
2 STEP	19	49	A2SH30	A2SH30-TR	30 x 19	28
3 STEP	28.5	58.5	A3SH30	A3SH30-TR	30 x 25	34
4 STEP	38	68	A4SH30	A4SH30-TR	30 x 31	41
5 STEP	47.5	77.5	A5SH30	A5SH30-TR	30 x 37	49
6 STEP	57	87	A6SH30	A6SH30-TR	30 x 43	60
7 STEP	66.5	96.5	A7SH30	A7SH30-TR	30 x 49	67

* Eligible for UPS. Tilt and roll casters add 5" to base length.

NOTE: Aluminum ladders are subject to a 50% restocking charge

Specify Tread Type when Ordering:

- Ribbed Tread (R)
- Heavy Duty Serrated Grating (G)



ALUMINUM LADDERS

- **350 LB. CAPACITY**
- All welded
- Aluminum mill finish, industrial grade welds
- Ideal for use in banks, libraries & hospitals and wash down applications
- Lightweight design
- Non-magnetic and non-sparking
- Paint-free for food and pharmaceutical applications
- Solid ribbed tread or heavy duty serrated grating
- 10" standard deep top step
- Optional 20" deep top step
- Built to OSHA & ANSI standards

POPULAR LOCK-N-STOCK - NOW AVAILABLE IN ALUMINUM

The feature is the drastically reduced weight. The benefit is less effort to maneuver the ladder leading to better productivity. Two Versions: a 7" deep top step with 22" high handles and a 10" deep top step with 30" high handles along with a rear guardrail. Lock the ALUMINUM stair section in place and **CLIMB IT- ROLL-IT- FOLD IT AND STORE IT!!**



MODEL NUMBER	STEPS INCLUDING TOP STEP	TOP STEP HEIGHT	WEIGHT LBS.	OPEN WIDTH & LENGTH	FOLDED SIZE	COLOR
ALS3247	3	28.5"	23	24 x 23	10 x 24 x 52	BLUE
ALS4247	4	38"	28	24 x 30	10 x 24 x 65	BLUE
ALS32410	3	28.5"	26	24 x 28	14 x 24 x 62	BLUE
ALS42410	4	38"	31	24 x 35	14 x 24 x 72	BLUE

ALUMINUM LIFT & ROLL WHEELBARROW STYLE LADDERS

Features 10" rubber wheels for easy portability even on rough surfaces. 14"-deep top step provides range of motion when working at higher levels. Nonmagnetic, non-sparking & paint-free, aluminum ladders are acceptable for pharmaceutical & food processing industries. Industrial-grade welds allow them to be used in wash-down applications.

SPECIFY TREAD TYPE WHEN ORDERING: Ribbed Tread (R) • Heavy Duty Serrated Grating (G)

STEPS INCLUDING TOP STEP	HEIGHT INCHES		18" WIDE TREAD	24" WIDE TREAD*	
	TOP STEP	OVER ALL	MODEL #	WGT Lbs.	MODEL #
5 STEP	50"	83"	30 x 47	ALWB5	42
6 STEP	60"	93"	30 x 53	ALWB6	50
7 STEP	70"	103"	30 x 60	ALWB7	58
8 STEP	80"	113"	36 x 66	ALWB8	66
9 STEP	90"	123"	36 x 72	ALWB9	74
10 STEP	100"	133"	36 x 78	ALWB10	82

*Models with 24" wide steps have 36" wide base

14" DEEP TOP STEP



10" RUBBER WHEELS

NEW! ALUMINUM LOCK-N-STOCK

- **300 LB. CAPACITY**
- Welded Construction
- Perforated Tread
- No hinge to break
- Easy to maneuver in the open or closed position
- Locks in the folded or climbing position
- Approx 10" deep when folded and 14" deep on 10" deep top step models
- Built to ANSI standards
- Blue powder coat finish

WHEEL BARROW STYLE ALUMINUM LADDERS

- **300 LB. CAPACITY**
- All welded
- 14" deep top step standard
- 10" rear rubber wheels - Great on rough surfaces
- Lightweight lift and roll wheelbarrow portability
- Built to OSHA and ANSI standards

STAINLESS STEEL ROLLING LADDERS

- **450 LB. CAPACITY**
- Ideal for wash down and corrosive environments
- Type T304 Stainless Steel construction
- 1-3 step ladders are all welded and have a 10" deep top step
- 4-12 step ladders have 14" deep top step standard
- Deeper top steps available on all models
- Bead blasted for uniform finish
- Casters for lock step ladders are stainless steel
- Spring Loaded casters are stainless and springs are carbon steel
- Built to OSHA and ANSI standards
- CAL OSHA available

AVAILABLE TREAD TYPES
Please specify when ordering.



Perforated Tread (P)



Heavy Duty Serrated Grating (G)

FOLD-N-STORE		
BASE W" x L"	WGT Lbs.	MODEL #
30 x 48	82	SSFAWL-5
30 x 54	92	SSFAWL-6
30 x 60	103	SSFAWL-7
30 x 66	118	SSFAWL-8
30 x 72	133	SSFAWL-9
30 x 78	149	SSFAWL-10
30 x 84	165	SSFAWL-11
30 x 90	180	SSFAWL-12

Stainless Steel Ladders Ideal for Wash Down & Corrosive Environments

Lockstep Ladder shown with perforated tread Built to OSHA and ANSI



Note: All stainless ladders are manufactured with industrial grade welds, not recommended for clean rooms.

# OF STEPS INCLUDING TOP STEP	Height Inches		SPRING LOADED CASTERS MODEL #	TILT & ROLL MODEL #	BASE W" x L"	WGT Lbs.
	TOP STEP	OVER ALL				
16" WIDE STEPS						
1 STEP NO RAILS	12	12	SS1N*	-	18 x 20	24
2 STEP NO RAILS	19	19	SS2N*	-	20 x 19	28
3 STEP NO RAILS	28.5	28.5	SS3N*	-	20 x 25	35
2 STEP	19	49	SS220	SSTR220	20 x 19	40
3 STEP	28.5	58.5	SS320	SSTR320	20 x 25	46
4 STEP	40	73	SS420	SSTR420	20 x 38	70
5 STEP	50	83	SS520	SSTR520	20 x 44	77
6 STEP	60	93	SS624	SSTR624	24 x 50	81
7 STEP	70	103	SS724	-	24 x 56	95
24" WIDE STEPS						
2 STEP NO RAILS	19	19	SS2N30	-	30 x 19	40
3 STEP NO RAILS	28.5	28.5	SS3N30	-	30 x 25	44
2 STEP	19	49	SS230	SSTR230	30 x 19	43
3 STEP	28.5	58.5	SS330	SSTR330	30 x 25	55
4 STEP	40	73	SS430	SSTR430	30 x 38	85
5 STEP	50	83	SS530	SSTR530	30 x 44	92
6 STEP	60	93	SS630	SSTR630	30 x 50	105
7 STEP	70	103	SS730	-	30 x 56	115

* Eligible for UPS. Tilt and roll casters add 5" to base length • **NOTE: Stainless Steel ladders subject to a 50% restocking charge**

SPRING LOADED CASTER MODELS



Spring loaded casters retract under user's weight. Non-marring floor caps grip floor for stable stationary positioning.



TILT & ROLL

shown with optional 20" deep top steps



* Fold-N-Store Capacity = 350 Lbs.

STEPS INCLUDING TOP STEP	HEIGHT INCHES				LOCKSTEP MODEL #
	TOP STEP	OVER ALL	BASE W" x L"	WGT Lbs.	
16" WIDE STEPS					
5 STEP	50"	83"	24 x 46	95	SS052414
6 STEP	60"	93"	24 x 52	105	SS062414
7 STEP	70"	103"	24 x 58	114	SS072414
8 STEP	80"	113"	24 x 64	132	SS082414
24" WIDE STEPS					
5 STEP	50"	83"	32 x 46	113	SS053214
6 STEP	60"	93"	32 x 52	126	SS063214
7 STEP	70"	103"	32 x 58	147	SS073214
8 STEP	80"	113"	32 x 64	165	SS083214
9 STEP	90"	123"	32 x 70	180	SS093214
10 STEP	100"	133"	32 x 76	199	SS103214
11 STEP	110"	143"	32 x 82	211	SS113214
12 STEP	120"	153"	32 x 88	227	SS123214

STAINLESS STEEL FOLD-N-STORE LADDERS

are bead-blasted to provide smooth uniform finish and feature 16" wide steps.



Cantilever Ladders • Heavy Duty Construction for Heavy Duty Applications!

The cantilever series of steel rolling ladders by Ballymore is the ideal solution for working or performing maintenance in elevated areas that are difficult to access. The cantilever is designed to be highly maneuverable and engineered for safety. Each cantilever is safety tested to ensure it will provide a safe elevated working environment

MODEL					14" OVERHANG		28" OVERHANG	
STEPS	PLATFORM HEIGHT	VERTICAL CLEARANCE	PLATFORM WIDTH	MODEL #	WEIGHT	BASE W" x D"	WEIGHT	BASE W" x D"
6	60"	57"	24"	CL-6	468	32 x 46	735	32 x 53
7	70"	67"	24"	CL-7	442	32 x 52	695	32 x 52
8	80"	77"	24"	CL-8	412	32 x 58	640	32 x 58
9	90"	87"	24"	CL-9	405	32 x 65	583	32 x 65
10	100"	97"	24"	CL-10	401	32 x 71	554	32 x 71
11	110"	107"	24"	CL-11	405	32 x 77	544	32 x 77
12	120"	117"	24"	CL-12	409	32 x 84	537	32 x 84
13	130"	127"	24"	CL-13	417	40 x 90	520	40 x 90
14	140"	137"	24"	CL-14	450	40 x 96	528	40 x 96
15	150"	147"	24"	CL-15	458	40 x 103	536	40 x 103

MODEL					35" OVERHANG		42" OVERHANG	
STEPS	PLATFORM HEIGHT	VERTICAL CLEARANCE	PLATFORM WIDTH	MODEL #	WEIGHT	BASE W" x D"	WEIGHT	BASE W" x D"
6	60"	57"	24"	CL-6	763	32 x 60	791	32 x 67
7	70"	67"	24"	CL-7	773	32 x 59	801	32 x 66
8	80"	77"	24"	CL-8	779	32 x 58	807	32 x 65
9	90"	87"	24"	CL-9	697	32 x 65	811	32 x 65
10	100"	97"	24"	CL-10	668	32 x 71	757	32 x 71
11	110"	107"	24"	CL-11	633	32 x 77	722	32 x 77
12	120"	117"	24"	CL-12	601	32 x 84	690	32 x 84
13	130"	127"	24"	CL-13	609	40 x 90	673	40 x 90
14	140"	137"	24"	CL-14	592	40 x 96	656	40 x 96
15	150"	147"	24"	CL-15	600	40 x 103	664	40 x 103

Weight is a combination of the ladder and counter weight, does not include skidding, add 120 lbs for packaging.



BASE FRAME
AND REAR
VERTICAL
RUGGED
2" x 1"



SPECIAL PURPOSE
LADDER AS DEFINED
BY ANSI-14.7

CANTILEVER SERIES LADDERS

• 300 LBS. CAPACITY

- Higher weight capacities available - call for details
- 59 degree slope
- Heavy-duty 1" x 2" rectangular frame
- High quality 5" x 2" locking casters
- Available with Rear Guardrail removed for easy walk through
- Powder coat finish
- Ships KD to prevent freight damage and lower freight cost

Add platform
overhang length to
model number when
ordering

Adjustable Height Cantilevered Platforms provide safe access to Tank Trucks, Railroad Cars, Conveyor Systems, Machinery or other applications with limited access.

Shown with optional
Safety Orange
finish & 30"
extension
railing



FEATURES:

- 9' to 13' adjustable work height
- Provides easy access to tank trucks, railroad cars & other cantilevered applications
- Great for clearing snow and ice off tops of trailers
- Manually propelled for use on hard level surfaces
- 48" long cantilevered platform
- Hydraulic hand pump raises & lowers cantilevered platform
- Open serrated grating steps and deck tread.
- Slip resistant climbing rungs
- 28"W x 60"L base, fixed outriggers spread to 69"
- Full rails on both sides, gates at each end of platform
- 2 swivel & 2 rigid 8" casters for use on hard surfaces
- Two adjustable stabilizing jacks secure lifts to ground
- Fixed platform height available
- Gray coat finish (Standard)

TANK TOP LIFTS

Model Number	Platform Max	Height Min	Platform Length	Platform Width	Underclearance Height	Weight Lbs.
TT-913	13' 8"	9' 4"	48"	24"	Adjustable 9' to 13'	1525
TT-913F	13' 8"	9' 4"	48"	24"	Non-Adjustable 9'to 13'	1450
TT-7-11	11' 8"	7' 4"	48"	24"	Adjustable 7' to 11'	1450
TT-11-15	15' 8"	11' 4"	48"	24"	Adjustable 11' to 15'	1625

New
Sizes
Available!

MANUALLY PROPELLED ADJUSTABLE HEIGHT TANK TOP LIFTS

• 300 LB. CAPACITY

OPTIONAL ACCESSORIES

- AC electric power
- DC electric power
- Air-Hydraulic power
- Tool Tray
- Fluorescent tube holder
- Platform duplex receptacle
- Removable 30" extension rail

Safety Orange Powder Coat

- For outdoor applications primer undercoat and powder coat finish is recommended.

Three power options:

- Plug in 120V AC w/thermal overload protection
- Independent 12V DC deep cycle system with battery, charger and double solenoid for added safety
- Air hydraulic power requiring 90 CFM with 90 PSI pressure


Custom
Engineered Vertical
Access Solutions
Available

**See Page 26
for what's
coming soon**



BALLYMORE LIFTS!

DRIVING INNOVATION TO NEW HEIGHTS

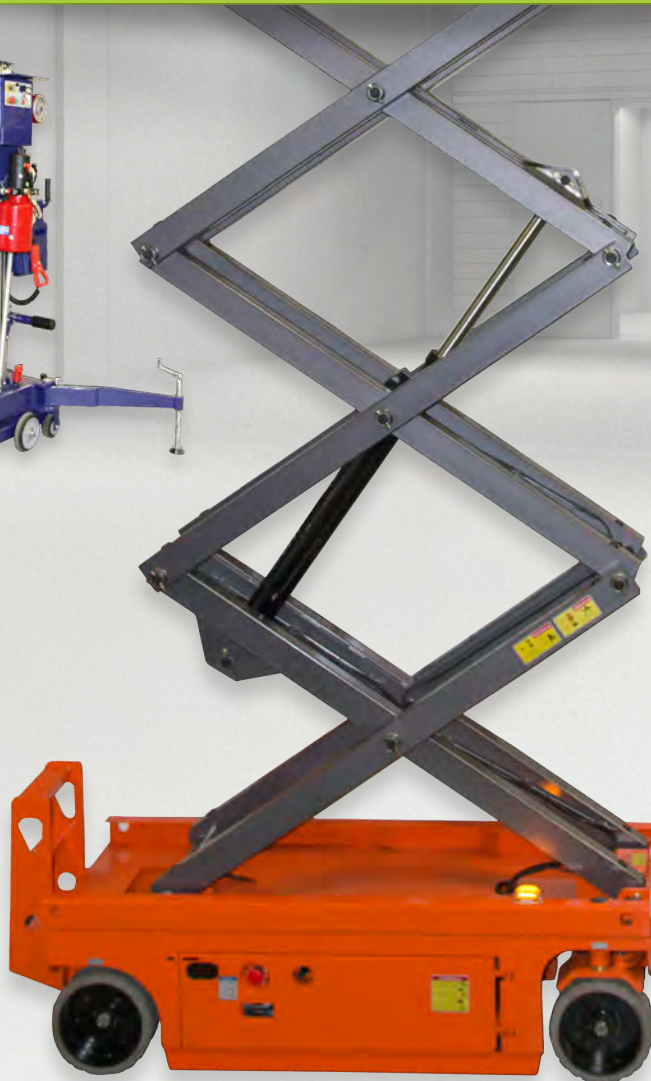

Ballymore Introduces New Wider Base and Cargo Deck Models

FEATURES:

- PS-12 and PS-15 models now include a larger 24"x32" cargo deck
- 12 volt DC power (AGM battery) with mounted charger included - Easily recharge using a standard 110 volt outlet
- High quality controls requires both hands to operate for safety
- 100+ raise and lower cycles between charges
- Key lock prevents unauthorized use
- Optional sensing system creates a 2' safety zone around lift alerting operator of activity below lift
- Meets or exceeds ANSI safety standards



MODEL #	WORKING HEIGHT	MERCH DECK MAX HEIGHT	FOOTPRINT W" x L"	OVERALL HEIGHT (LOWERED)	POWER	WEIGHT LBS.
PS-10	14'	9'	36" x 54"	76"	12V DC	1022
PS-12*	18'	13'	42" x 54"	94"	12V DC	1089
PS-15*	21'	15'9"	43" x 60"	90"	12V DC	1189

* Available with optional sensing system

The ideal lift for the shop, stock room or retail floor!

Power Stocker's optional sensing system creates a safety zone perimeter around the lift when in the raised position.



MANUALLY PROPELLED HYDRAULIC POWER STOCKER LIFTS

- 450 LB. CAPACITY (PS-10)
- 650 LB. CAPACITY (PS-12 AND PS-15)

With this ground entry, manually propelled, hydraulic order picker merchandise can be raised to shelf level and easily slid on or off shelf to minimize lifting, improving productivity and employee safety. It's easy to operate and ideal for retail storerooms and stockrooms.

No Outriggers Required. Floor Locks Secure Power Stocker Safely in Place!

FOR CUSTOM ENGINEERED SOLUTIONS • CALL: (800) 762-8327

The New Drivable Power Stocker is NOW AVAILABLE!

Our New Drivable Power Stocker, Model Number PS-12D has all the ergonomic features and benefits as our push-able models, including ground entry and the ability to raise merchandise to shelf levels while easily sliding the product on or off the shelf. This minimizes the back strains of lifting and at the same time improves productivity and safety.

The Drivable Power Stocker is easy to operate. The control(joy) stick makes navigation simple and safe. The Drivable Power Stocker has two speeds and can be operated in the raised position. The PS-12D comes with a Gate Safety Alarm, Manual Lowering Valve, Warning Lights plus Emergency Stop Buttons- all Standard!

FEATURES:

- Large Cargo Deck 32"(Wide)X 28"(Deep)
- Standing Platform 28"(Wide)X 19"(Deep)
- 650 lbs. Capacity-Merchandise and Operator
- 2-12V Batteries.
- Power Cord for charging
- Easy charging using standard 110V outlet
- Key Lock prevents unauthorized usage
- Ground and Control Box Operations
- Two Speeds
- Comes in orange or blue



Power Stocker's optional sensing system creates a safety zone perimeter around the lift when in the raised position.

MODEL #	WORKING HEIGHT	MERCH DECK MAX HEIGHT	FOOTPRINT W" x L"	OVERALL HEIGHT (LOWERED)	POWER	WEIGHT LBS.
PS-12D*	18'	13'	42"X 60"	96"	2-12V	1600

* Available with optional sensing system

DRIVABLE POWER STOCKER LIFTS

- 650 LB. CAPACITY (PS-12D) (Operator & Inventory)

NEW





MINI SCISSOR LIFT

• 500 LB. CAPACITY

- Manually Propelled
- Working heights up to 19'
- Maximum raised platform height of 9' 10" to 12' 9"
- 28" x 50" Platforms
- Easy to roll on 6" casters
- 12 Volt DC Powered
- Power Unit stored in a lockable slide out drawer
- Battery charge indicator is included
- Emergency stop button
- Emergency lowering system
- Forklift Pockets
- Meets/exceeds ANSI safety standards



Ballymore's mini scissor lift work platforms are uniquely engineered for easy use and maneuverability in narrow aisles and tight access areas. It's the perfect lift for one man maintenance jobs in high, hard to reach areas, providing safe vertical access to working heights up to 19'

Mini Scissor Lifts are manufactured from durable, heavy duty steel. Safety features include top and mid rail guards with a hinged gate for easy and safe access. Platform includes toe guards to prevent slips and falls.

NO OUTRIGGERS REQUIRED!

*Floor Locks secure lift safely to the floor.
Small footprint enables easy access to limited access areas*



MODEL #	WORKING HEIGHT	PLATFORM MAX.	PLATFORM MIN.	FOOTPRINT W"x L"	OVERALL HEIGHT (Lowered)	WEIGHT (Lbs.)
MSL-10	16'	9' 10"	26"	30" x 57"	77"	1200
MSL-12	19'	12' 9"	26"	30" x 57"	77"	1260

CALL FOR PRICING: (800) 762-8327 OR VISIT OUR WEBSITE: WWW.BALLYMORE.COM

THE MINI MERCHANDISE LIFT (BMML-9)

• 500LB. CAPACITY

- Base = 26" Wide X 48" Long - (55" overall length including push rails)
- Merchandise Shelf = 25" Wide X 17" Long
- Overall Height = 55"
- Fully Lowered Standing Platform = 13"
- Standing Platform = 23 1/2" Wide X 20" deep
- Wheels - 4- 6" diameter
- 2 - 2" Wide Locking Swivels
- 2 - 2" Wide Rigid Wheels
- Shelf Height Maximum = 110"
- Standing Platform Maximum Height = 71"
- Color Yellow
- Power - 12V
- Weight = 650 lbs Approximate
- Shelf Capacity - 150lbs (tested)

THE MINI MERCHANDISE LIFT

Footprint only 26"W X 48"L!
Great for tight aisle ways!



PUSHABLE

Features

- Shelf Lip to prevent packages from falling off the front of the lift
- Safety Control Panel- 3 button plus Kill Switch
- Manual Lowering Valve
- Limit Switch included. This will prohibit the lift from ascending without the casters being locked to the floor.
- "Push" handles added to the front and back of the lift for easy maneuverability
- Safety shield to prevent access to internals
- Enlarged Standing Platform for added safety and comfort



DISCOVER BALLYMORE'S NEWEST 2 OCCUPANT DRIVABLE SCISSOR LIFTS

INNOVATION DRIVEN TO NEW HEIGHTS



**Featuring
An Extendable
Roll Out Cantilever
Platform**

The roll-out cantilevered platform provides safer access to machinery and equipment.



Gradeability



0° Turn Radius



DRIVABLE SCISSOR LIFTS

Features:

- Extendable Roll-Out Cantilever Platform
- Drivable at full heights
- Self-Locking safety gate
- Emergency Stop Button
- Emergency Lowering System
- Forklift Pockets
- Powder Coat finish
- DMSL-10 & DMSL-12 Maximum Occupants = 1
- Meets or Exceeds ANSI Standards



Model Number	Weight Capacity	Working Height	Platform Height		Platform W x L (Outer Dimension)	Platform Extension	Base W x L	Overall Height	Weight (lbs)	Power - Batteries
			Max	Min						
DMSL-10	500	16'	10'	36"	28" x 50"	22"	30" x 57"	80"	1825	2 - 12V
DMSL-12	500	19'	12'	36"	28" x 50"	22"	30" x 57"	80"	1900	2 - 12V
DMSL-19	500	25'	19'	42"	29" x 66"	36"	30" x 74"	86"	3164	4 - 6V
DMSL-26	500	32'	26'	48"	32" x 90"	36"	32" x 98"	92"	4718	4 - 6V
DMSL-26(W)	1000	32'	26'	48"	44" x 90"	36"	46" x 98"	92"	4884	4 - 6V
DSL-32	700	38'	32'	48"	44" x 90"	36"	46" x 98"	96"	5533	4 - 6V
DSL-40	550	46'	40'	58"	44" x 90"	36"	47" x 98"	102"	6834	4 - 12V
DSL-45	500	51'	45'	58"	44" x 104"	36"	55" x 112"	102"	7320	4 - 12V



MOBILE VERTICAL SINGLE PERSON LIFT

- Manually propelled maintenance lift
- Working heights to 35'
- Compact design for easy storage
- 29x56 base allows lift to roll through standard doorways
- Easy to use outriggers extend from base to provide excellent stability
- 12 Volt DC Power (raise and lower)

300 lb. Capacity



MOBILE VERTICAL LIFT • MANUALLY PROPELLED LIFT

MODEL NUMBER	WORKING HEIGHT	PLATFORM MAX	PLATFORM MIN	PLATFORM W" x L"	W" x L"	HEIGHT STOWED	WEIGHT
BMVL-30	35'	30'	10"	24" x 27"	29" x 56"	78"	950

ADDITIONAL INFORMATION

- Outriggers included & attached
- Outrigger footprint= 64"x74"

MOBILE VERTICAL LIFT:

This manually propelled lift is designed for one worker and provides access to 35' working heights. Ideal for work on overhead lighting and ceiling maintenance. 12 Volt DC Power with easy to use controls allows the BMVL-30 to raise and descend smoothly and quietly. Compact design for easy storage and doorway passage. Outriggers swing easily into place to provide excellent stability. For additional safety, outriggers include interlocks, which prevent the platform from being raised unless all four outriggers are in firm contact with the ground. The BMVL-30 also includes a tilt and roll design to allow the lift to be easily transported from one job site to another.



CALL FOR PRICING: (800) 762-8327 OR VISIT OUR WEBSITE: WWW.BALLYMORE.COM

DRIVABLE VERTICAL MAST LIFT (DVML-18)

Introducing a Drivable Version of the Ballymore Push-able Vertical Lift

- **330 LBS. CAPACITY**
- 42" handrails for additional safety
- Easy operating controls
- Numerous Safety features including a Manual Lowering Valve, Emergency Stop Button, Automatic Pothole Protection
- Key Entry for controlled usage
- 2-12V Batteries that charge using a 110 volt outlet
- Fork Pockets for transportation



POWDER COATED TOUGH™

NEW

- 18' Platform Height
- 24' Working Height
- Compact Footprint only 30" X 62"
- Standard Platform 24" wide X 25" long
- Cantilever Extension 21"
- Weight 2430 lbs.
- Durable Orange Powder Coat





Ballylift Model # BL-315



Cantilevered platform extends 34" beyond base frame



Rolls thru standard doorway

FEATURES:

- Totally enclosed platform with 42" guardrails, midrails, and gate; 4" toeboards and skid resistant mat
- Two platform styles available:
 - Standard platform with steel deck (BL-315)
 - Cantilevered platform w/aluminum deck (BL-C14)
- Built-in ladder with flat, skid resistant treads and grab rails provides access to platform in fully lowered position while anti-skid rungs provide access to platform when platform is raised
- Compact base frame rolls on two swivel and two rigid 6" casters
- Rails fold down for doorway passage and easy storage
- Base is 32" wide by 65" long, outriggers extend to 68" wide
- Leveling jacks secure lift to the floor
- Hydraulic hand pump provides easy lifting
- Standard finish is deep gray
- Meets/exceeds ANSI safety standards

BALLYLIFT SINGLE WORKER LIFTS

- **300 LB. CAPACITY**
- **Manually propelled maintenance lift providing working heights to 21' high**
- Easy to use hydraulic hand pump, or choose from available AC or DC power options, including:
- Convenient plug in 120V AC
- Independent 12V DC deep cycle system complete with battery and charger
- Air hydraulic power requiring 90 CFM with 90 PSI pressure

BALLYLIFT • MANUALLY PROPELLED ONE WORKER LIFTS

	MODEL NUMBER	PLATFORM MAX	PLATFORM MIN	PLATFORM LENGTH	PLATFORM WIDTH	WEIGHT LBS.	WORKING HEIGHT
Standard	BL-315	15'	6' 4"	20"	28"	590	21'
Cantilevered	BL-C14	14'	6' 4"	64"	20"	900	20'

OPTIONAL ACCESSORIES

AC electric power	Tool Tray
DC electric power	Fluorescent tube holder
Air-Hydraulic power	Platform duplex receptacle

CALL FOR PRICING: (800) 762-8327 OR VISIT OUR WEBSITE: WWW.BALLYMORE.COM

MR TELESCOPING HYDRAULIC MAINTENANCE LIFTS

Model Number	Working Height	Platform Height		Weight Lbs.
		Max	Min	
MR-15-AC	21'	15'	6' 4"	800
MR-15-DC	21'	15'	6' 4"	930
MR-20-AC	25'	19' 3"	6' 4"	1,000
MR-20-DC	25'	19' 3"	6' 4"	1,130
MR-24-AC	30'	23' 8"	6' 7"	1,200
MR-24-DC	30'	23' 8"	6' 7"	1,330
MR-28-AC	34'	28'	6' 10"	1,420
MR-28-DC	34'	28'	6' 10"	1,550

FEATURES:

- Select from maximum platform heights of 15', 19', 24' or 28'
- Roomy 28" x 36" platform
- Accommodates two workers
- Totally enclosed platform with 42" guard rails, midrails & gate; 4" toeboards and non-slip deck
- Built-in ladder with flat, skid resistant treads and grab rails provides access to platform in fully lowered position
- Rails fold for doorway passage and easy storage
- Non-marking 8" casters for easy rolling and maneuverability
- Self-storing outriggers extend from base for maximum stability
- Leveling jacks secure unit to floor and compensate for uneven surfaces



Rolls thru standard doorway



TWO
WORKER
CAPACITY

500 lb.
Capacity

Shown with optional orange finish

MR LIFTS TELESCOPING HYDRAULIC MAINTENANCE LIFTS

- **500 LB. COMBINED TWO PERSON CAPACITY**
- **Working heights to 34'**
- **Three power options:**
 - Convenient plug in 120V AC
 - Independent 12V DC deep cycle system with battery and charger
 - Air hydraulic power requiring 90 CFM with 90 PSI pressure
- Deep gray finish
- Meets ANSI safety standards

OPTIONAL ACCESSORIES

Air-Hydraulic power
Tool Tray
Fluorescent tube holder
Platform duplex receptacle



MANUALLY PROPELLED SINGLE PERSON MAINTENANCE LIFT

- **300 LB. CAPACITY**
- **Working heights to 16'**
- **No outriggers required**
- Fully enclosed 26" x 28" platform with 42" guardrails, midrails and gate
- Welded compact 32" x 63" base fits through doorways
- Rolls effortlessly on 2 locking swivel and two rigid 6" casters
- Two hands required to operate controls for user safety
- Standard deep gray finish
- Meets ANSI safety standards

ELECTRICAL NOTES:

(on all lift products)
Our standard electrical components are NEMA 1 or equivalent and are intended for indoor use in normal atmospheric conditions



**300 lbs.
Capacity**

Model OP-11
includes shelf that raises and lowers with platform



Model OP-10
Overall height in fully lowered position is 78"



2 MODELS TO CHOOSE FROM:

Ground Entry (OP-10*): Raises to 9'6", includes two 24" x 24" shelves on base *Shelf that raises and lowers with the platform not available

One Step Entry (OP-11): Raises to 10'6", contains two 18" x 24" shelves on base. Includes a 20" x 28" shelf that raises and lowers with the platform

- 12V DC power source w/battery & charger for raising & lowering, (alt power sources available)

- 80 to 100 raise and lower cycles between charges

MAINTENANCE LIFT • SINGLE PERSON -MANUALLY PROPELLED

MODEL NUMBER	PLATFORM MAX	PLATFORM MIN	WORKING HEIGHT	PLATFORM LENGTH	PLATFORM WIDTH	WEIGHT LBS.
OP-10	9' 6"	12"	15'	26"	28"	710
OP-11	10' 6"	23"	16'	26"	28"	730

Ships at freight class 125.

CALL FOR PRICING: (800) 762-8327 OR VISIT OUR WEBSITE: WWW.BALLYMORE.COM

HEAVY DUTY ELEVATED WORK PLATFORMS

- **COMBINED 1,000 LBS. Four Person CAPACITY**

STANDARD FEATURES:

- 120 volt AC power (raise and lower) with thermal overload protection

OPTIONAL POWER:

- 12 volt DC deep cycle system available with battery and charger
- Air-Hydraulic Drive - recommended for hazardous environments

NOTE OF CAUTION:

Unless special provisions are made, platforms and lifts must not be used for energized bare-wire electrical work or operated on inclined surfaces.

When this equipment is used, ground personnel should be excluded from the immediate work area.



**SEE PAGE 21 FOR
PUSH-ABLE
& DRIVABLE
LIFTS**

- Emergency stops:
 - Located on platform for operator use
 - Emergency stop also located on base for use by ground personnel
 - Lockable to prevent unauthorized use
- Deep gray finish

OPTIONS/ACCESSORIES:

- Cantilevered platform extensions
- 120 volt outlet on platform
- Special voltage electrical systems
- Safety orange powder coat finish

MANUALLY PROPELLED HYDRAULIC SCISSOR LIFTS

WORKING HEIGHT	PLATFORM HEIGHT		STABILIZERS	SPECIFY MODEL #	WEIGHT (lbs.)
	MAX	MIN.			
13'	7'4"	2'4"	NOT REQ'D	HW1-7	1,700
16'	10'1"	5'		HW1-10	1,800
19'	12'10"	3'		HW2-13	2,000
21'	15'8"	5'8"	STD. EQUIP.	HW2-16*	2,100
24'	18'8"	3'7"		HW3-19*	2,300
27'	21'4"	6'4"		HW3-22**	2,400
30'	24'4"	4'1"		HW4-24**	2,700
33'	27'	6'8"		HW4-27**	2,800

NOTE: All base dimensions are 9 by 4 ft. *Add 20" to 4-ft base width for extended stabilizers ** Add 40" to 4-ft base width for extended stabilizers

- Manually propelled
- Totally enclosed platform with 42" guardrails, midrails, 4" toeboards and swing-in gate
- Large 3' x 8' platform w/serrated grating deck for secure footing
- Built-in ladder for platform access in fully lowered position
- 8" swivel casters for easy rolling and maneuverability
- Self-storing outriggers extend from base for maximum stability (optional on lower height models)
- Leveling jacks secure unit to floor, compensating for uneven surfaces (standard on floor models with raised deck heights above 15', optional on lower height models)
- Meets ANSI requirements
- For operator safety platform controls require both hands to change elevation

Custom Designs

Available to meet your special access problems - call for quote

- Three Piece Construction: two stair sections & one bridge
- Heavy 1 1/4" schedule 40 pipe structural frame & rails
- Standard tread: expanded metal or serrated grating (Optional solid steel tread with abrasive mat on bridge available to avoid debris falling onto conveyors)
- Full rails, midrails and toeboards
- Stairway slope allows easier climbing and descent
- Gray powder coat finish

- 10" step spacing on stair sections, 9" of horizontal run per step
- Each stair section has four legs with large, pre-drilled plates to bolt to the floor
- Maximum use of limited floor space while complying to OSHA 1910.24 requirements
- Available in alternate configurations: U-Shape, Z-Shape, L-Shape, etc. (see below)

HEAVY DUTY INDUSTRIAL CROSSOVERS

STAIR SECTIONS (Set of 2) FOR INDUSTRIAL CROSSOVERS

2 to 7 Steps... with choice of widths

# of Steps each Section	Vertical Clearance Inches	27" Overall Width (Expanded Metal)		31 1/2" Overall Width (Serrated Grating)		38 1/2" Overall Width (Serrated Grating)	
		MODEL #	WEIGHT	MODEL #	WEIGHT	MODEL #	WEIGHT
2	28	CS227	253	CS231	254	CS238	276
3	38	CS327	310	CS331	325	CS338	351
4	48	CS427	378	CS431	393	CS438	428
5	58	CS527	445	CS531	465	CS538	505
6	68	CS627	517	CS631	537	CS638	583
7	78	CS727	600	CS731	630	CS738	680


BRIDGE SECTIONS FOR INDUSTRIAL CROSSOVERS

Combine any length with appropriate width stair sections


Length in Inches	Horizontal Clearance Inches	27" Overall Width (Expanded Metal)		31 1/2" Overall Width (Serrated Grating)		38 1/2" Overall Width (Serrated Grating)	
		MODEL #	WEIGHT	MODEL #	WEIGHT	MODEL #	WEIGHT
20	18	-CB227	88	-CB231	95	-CB238	102
30	28	-CB327	111	-CB331	120	-CB338	128
40	38	-CB427	133	-CB431	140	-CB438	153
50	48	-CB527	156	-CB531	165	-CB538	180
60	58	-CB627	195	-CB631	203	-CB638	220

NOTE: For complete model designation use model # prefix for pair of stair sections from "Stair Sections" table, plus model # suffix from "Bridge Sections" table. (i.e., CS327-CB227).

**Extra Heavy Duty
800 lb.
Capacity**

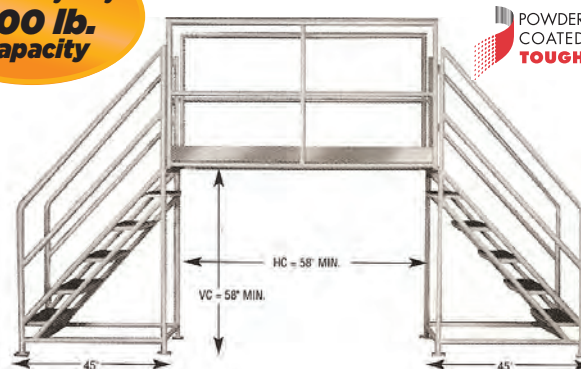

Example Shown: Model CS527-CB627 (27" Overall Width)



Alternate configurations available. Call for details.



Ballymore introduces the heavy duty merchandise ladder cart with a capacity of 1,000 lbs. The cart has two large shelves for transporting a variety of merchandise. Ladder portion has a spring loaded device which secures the ladder to the floor when climbing and retracts for easy maneuvering. Cart is equipped with 4 casters- 2 swivels and 2 rigid for effortless turning and moving. Durable powder coated gray with yellow steps.

NEW

It's here! Ballymore's latest product - a perfectly designed patent pending Heavy Duty Paint Cart. The new paint cart makes transporting a 5 gallon container quicker and less stressful on the back and shoulders.

**POWDER
COATED
TOUGH™**

**Not Just
For Paint
Containers!**



MERCHANDISE LADDER CART

- **1000 LB. CAPACITY**
- Base Dimensions= 21"x 51"
- * Overall Height= 63"
- Steps= 3 with Abrasive Mat
- Top Shelf Height= 28"
- Top Shelf Dimensions= 20" Wide by 40" Long
- Bottom Shelf Dimensions= 20" Wide by 45" Long
- Casters= 4 - 2 swivels and 2 rigid
- Weight = 108 lbs.

PAINT CARTS

Features:

- **400 LB. CAPACITY**
- Base = 20" Wide X 27" Long
- Shelf - 20" Wide X 20" Long
- Overall Height 42"
- Four Heavy Duty Casters (2 swivel, 2 rigid)
- Weight = 62 lbs.
- Ships Assembled
- Colors Available In Orange or Blue

PORTABLE LOADING DOCK

- **CAPACITY 1,500 LBS.**
- Platform Height- Ground Level to 55" high
- Platform Dimensions - 47" X 75"
- Weight - 2,178 lbs.
- Color - Safety Orange and Yellow
- Overall Base - 68" wide by 105" long
- Overall Height (fully lowered) - 44"
- Overall Height (fully raised) - 98"
- Two 12V Batteries
- 24V Drive Motor

ALL IN ONE CONTROL HANDLE



POWDER
COATED
TOUGH™

MODEL NUMBER: PLD PLUS



FEATURES AND BENEFITS

- Powered in forward or reverse directions
- All in one Control Handle for steering, movement forward and reverse, and platform raising and lowering
- Heavy Duty Capacity - 1,500 lbs.
- Large Platform designed to address a wide variety of products
- Key Control Operation
- Fold Down Rails
- Safety Features including Emergency Stop Button
- Convenient 110 volt charging
- Extendable Side Rails
- Battery Power Indicator
- Built in Cycle Counter

Easily load or unload heavy objects to dock levels or pickup truck bed heights!



COMING SOON



ELECTRIC PALLET TRUCK

- Lift and Fork Height from 111" to 214"
- Overall Heights from 155" to 258"
- Capacity 3000 lbs.
- Lowered Mast Heights from 78" to 98"



**HIGH PERFORMANCE STRADDLE-LEG
REACH STACKER WITH PANTOGRAPH**

- Lift and Fork Heights from 114" to 236"
- Extended Overall Heights from 132" to 259"
- Capacities ranging from 3300 lbs. to 4400 lbs.
- Lowered Mast Heights from 76" to 108"



PLEASE FOLLOW OUR WEBSITE WWW.BALLYMORE.COM
FOR INITIAL INVENTORIES AND SIZES



Need a custom ladder, lift or platform? We will engineer & fabricate to meet your requirements.

Need a custom vertical access solution? Let us work with you step-by-step on your custom application. We'll engineer and fabricate a custom ladder, lift or platform to meet your specific requirements in a quick and timely manner. Make your custom application a reality! Call Ballymore today: **800-762-8327**



CUSTOM ENGINEERED WORK PLATFORMS



CUSTOM VERTICAL ACCESS SOLUTIONS

Ballymore's custom design & fabrication capabilities can meet requirements for projects of all sizes and all types.

CUSTOM LIFTS, PLATFORMS & LADDERS



CALL FOR CUSTOM SOLUTIONS: (800) 762-8327

Product Specifications are subject to change without notice. Please confirm critical product specifications at the time of ordering.

Ship Prepaid and Add to take advantage of freight cost reductions with our carrier.

Ladder Inspection Procedure

Shipments are made FOB factory. Each product has been inspected before shipment. Consignee is responsible to inspect material at time of delivery, and should refuse shipment or make written notice to carrier upon receipt of damaged materials.

Carriers and Ballymore will not accept claims if damage is not noted at the time of delivery.

Freight: Ballymore can provide estimated freight cost based on our preferred carriers. Note: Costs are subject to change depending on fuel surcharges, special delivery requirements, etc. Ballymore will not be responsible for differences in freight estimates and actual freight costs.

On collect or 3rd party billing shipments, any freight claims must be handled by the customer, including refused shipments.

WARRANTY (All products including lifts)

Company warrants these products to be free from defects in material and workmanship for a period of one year from date of original purchase. Component parts carry individual warranties as provided by the manufacturer. Our warranty does not extend to parts or end products subjected to misuse, neglect, damage in shipment, by accident or failure to comply with operating instructions. We will repair or replace any unit which is defective during the warranty period if that unit is returned to our factory properly packaged with transportation charges paid. Claims for unauthorized field labor or time charges will not be accepted. Company will not be responsible for any consequential damages of any nature.

RETURN POLICY: Written factory permission must be received prior to return. Returns must be in good condition and made within 30 days of original shipment. Freight prepaid. Restocking charge of 20 - 25% on standard items, 50% on aluminum and stainless.

NON-REFUNDABLE ITEMS:

Custom or modified ladders, work platforms, crossovers, modified or custom lifts are non-refundable.

Minimum Order: \$15.00, Prepay and add shipments are subject to \$5.00 service charge.

POLICIES WARRANTY SHIPPING & RETURNS INFORMATION



STEP UP TO BALLYMORE

PATENTED NAVIGATOR LADDER


Uniquely engineered to turn easily in tight aisles on retail floors and in stock rooms. Handrails and a more gradual climbing slope provide increased safety, reducing accidents.

PATENTED HYDRAULIC MERCHANDISE LIFT

This patented manually propelled and drivable hydraulic lift provides increased safety and productivity. Optional safety zone sensing system alerts operator of activity below the lift.



ELEVATION THROUGH INNOVATION

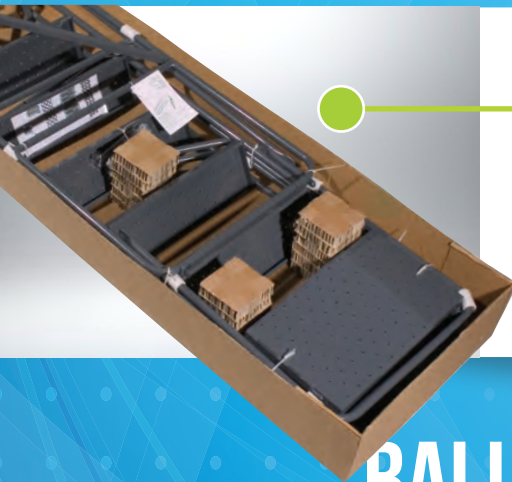

PATENTED BOXED LADDER SYSTEM

Innovative, patented bolt-in top step design is engineered to allow ladders to ship boxed, reducing freight costs, minimizing risk of freight damage and increasing stocking efficiency.

PATENTED WEIGHT ACTUATED LOCKSTEP

The safest, most durable Lockstep on the market today. Patented design securely locks the ladder to the floor when just 70 lbs. is applied to any of the steps, providing increased safety.



BALLYMORE DELIVERS MORE

- **MORE** Component Ladder options to extend the life and utility of your ladders
- **MORE** Custom Engineered Ladder, Lift & Work Platform Innovations
- **MORE** Safety Designed Products and Options
- **MORE** Patented Vertical Access Solutions



BALLYMORE

ROLLING SAFETY LADDERS • PERSONNEL LIFTS • WORK PLATFORMS • CARTS

231 W Stewart Huston Drive
Coatesville, PA 19320

501 Gunnard Carlson Drive
Coatesville, PA 19320



610.593.5062 • 800.762.8327 • WWW.BALLYMORE.COM