




Bobcat®

463

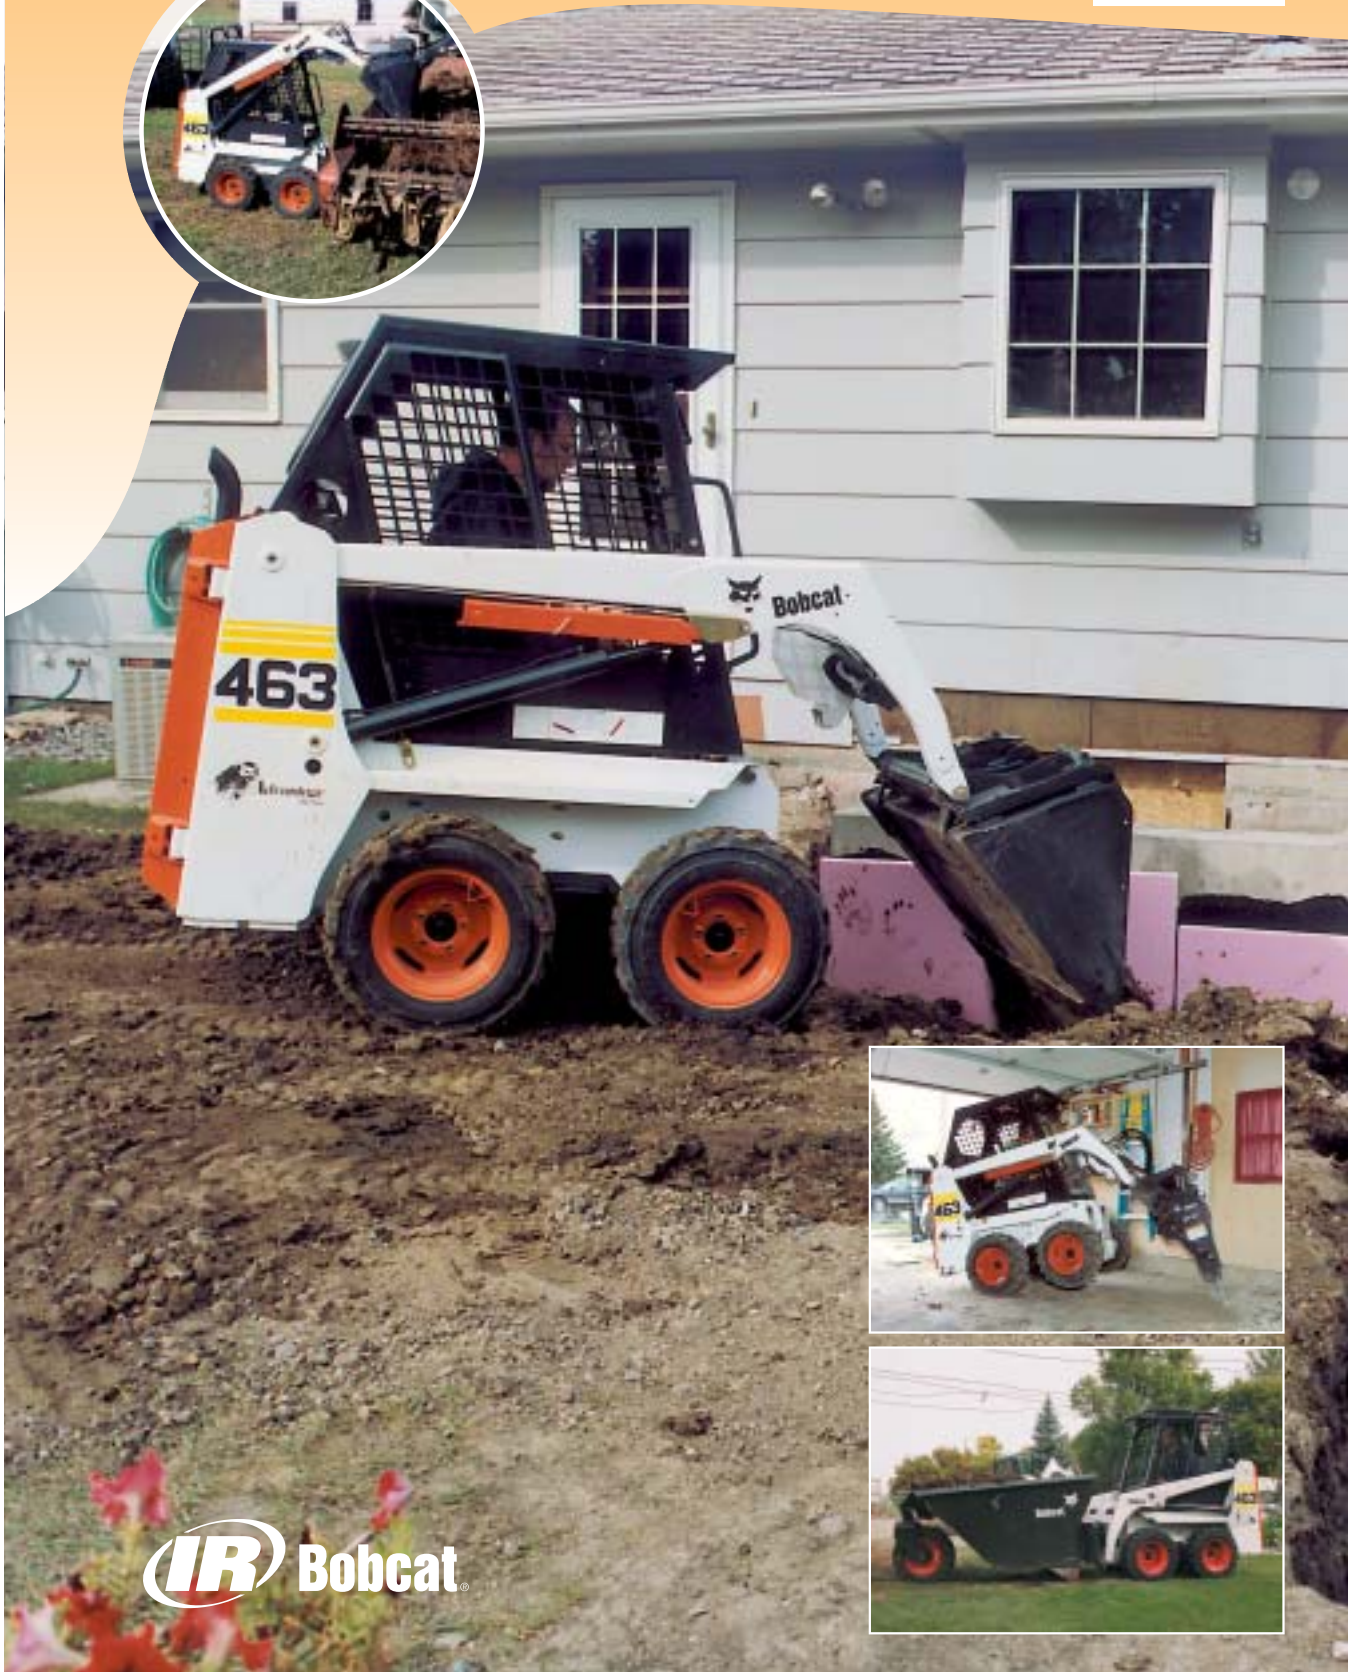

Bobcat®

Performance

463

Rated operating capacity	317 kg
Tipping load	681 kg
Hydraulic pump capacity	37.8 l/min at 3100 RPM
Travel speed	9.9 km/h

Engine

Make/Model	Kubota / D722-E
Fuel/Cooling	Diesel / Liquid
Power at rated RPM	11.7 kW (15.7 HP)
EEC 80/1269 (ISO 9249)	at 3000 RPM
Engine power class	16 kW (22 HP)
Number of cylinders	3
Displacement	0.72 l
Fuel tank capacity	24.6 l

Weight

Shipping weight ^①	1134 kg
Operating weight ^②	1301 kg

Operation

Steering and drive	Forward, reverse, travel speed and steering controlled by two hand levers
Hydraulics	Two foot pedals or advanced hand controls raise/lower lift arms and dump/rollback bucket
Transmission	Hydrostatic four-wheel drive

Standard features

- Bobcat Interlock Control System (BICS™)
- Bob-Tach
- EC Certification
- Front auxiliary hydraulics
- Horn
- Lift arm support
- Operating lights (front & rear)
- Operator cab[®] (ROPS/FOPS)
- Parking brake
- Seat bar
- Seat belt
- Spark arrestor muffler
- Suspension seat
- 5.70 x12 ply tires

Optional features

- Backup alarm
- Catalytic purifier
- Keyless ignition switch
- Lift kit
- Special Applications kit
- 6.50 x 10 solid tires
- 23 x 8.50 x 12, 6 ply Bobcat heavy duty flotation tires

Attachments available


- Backhoe
- Buckets
- Dumper
- Earth auger
- Hydraulic breaker ^④
- Pallet forks
- Sweeper ^⑤
- Tracks
- Utility fork/Farm grapple

^④ When operating the Bobcat loader with this attachment, a special application kit, which includes a 12 mm Lexan front door and 6 mm top and rear windows, must be used.

^⑤ Optional water kit

Dimensions

- All dimensions are in mm.

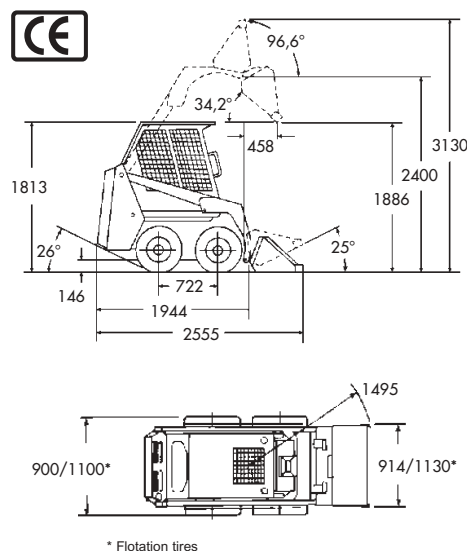

* Flotation tires

^① Machine with standard tires, without bucket

^② Machine with Bobcat tires, bucket, fuel tank full and operator

^③ Get more info from your dealer



BOBCAT EUROPE

J. Huysmanslaan, 59 - B - 1651 LOT Belgium
 ☎ +32 (0)2 371 68 11 - Fax +32 (0)2 371 69 59

Specifications and design are subject to change without notice.