

"It's some kind of animal!"

SPECIFICATIONS



bobcat® 630





**RELIABLE, MULTI-PURPOSE
MACHINE FOR CONSTRUCTION,
FARM AND INDUSTRY.**

HEIGHT	WIDTH (LESS BUCKET)	RATED OPERATING CAPACITY
75.5" (1920 MM)	53.5" (1360 MM)	1000 LBS. (450 KG)

- Easy accessibility to engine compartment and service points behind new swing-open tailgate.
- Fast, solid-connection Bob-Tach system and variety of attachments turn the 630 into a "do it all" machine.
- Operator comfort: wide cab, adjustable seat, arm rests, approved ROPS.
- Low number of parts requires less maintenance, faster servicing and lower replacement costs.

CLARK

MELROE DIVISION • CLARK EQUIPMENT COMPANY • FARGO, ND 58102



CLARK


Kn-30M-2-80-F

"It's some kind of animal!"

SPECIFICATIONS



bobcat® 632

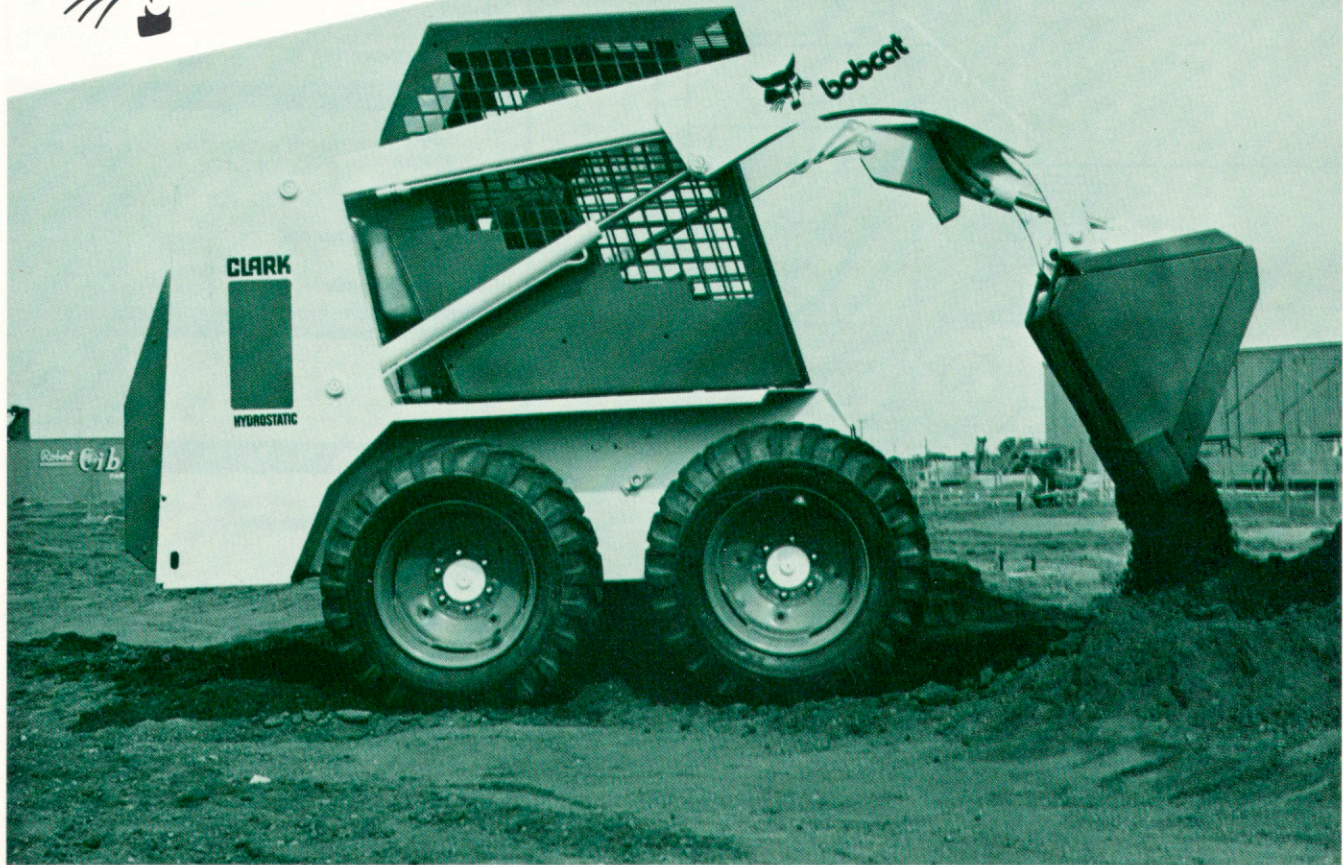

**LOW, NARROW, COMPACT . . .
THE PERFECT MACHINE FOR
STEADY WORK IN TIGHT-FIT
AREAS**

CLARK

MELROE DIVISION • CLARK EQUIPMENT COMPANY • FARGO, ND 58102


HEIGHT	WIDTH (LESS BUCKET)	RATED OPERATING CAPACITY
75.5" (1920 MM)	53.5" (1360 MM)	1000 LBS. (450 KG)

- Easy accessibility to engine compartment and service points behind new swing-open tailgate.
- Fast, solid-connection Bob-Tach system and variety of attachments turn the 632 into a "do it all" machine.
- Operator comfort: wide cab, adjustable seat, arm rests, approved ROPS.
- Low number of parts requires less maintenance, faster servicing and lower replacement costs.



bobcat 632

SPECIFICATIONS

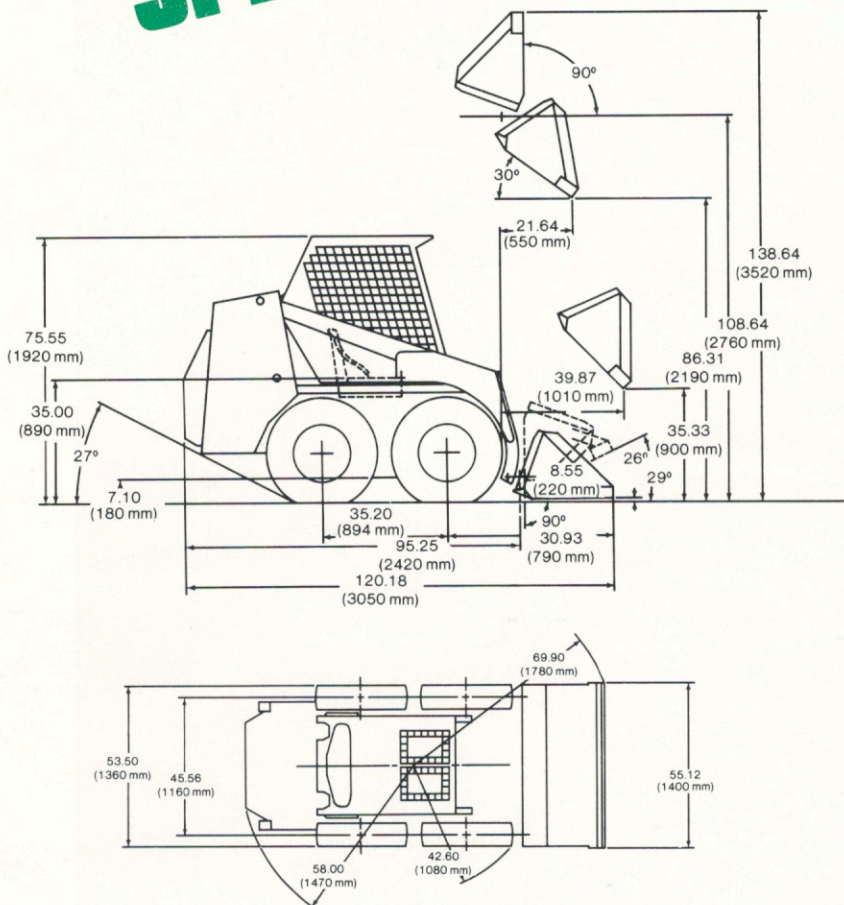

All measurements have their respective metric equivalents enclosed by parentheses.

*NOTICE — Operating capacity rated with standard digging bucket, according to SAE Standard No. J818a — OPERATING CAPACITY TO EQUAL NO MORE THAN ONE HALF THE TIPPING LOAD.

Pictures of Bobcat loaders may show other than standard equipment.



Industrial and Construction Equipment Division (ICED)

NOTE—Where applicable, dimensions are in accordance with ICED Standards (Specifications and design are subject to change without notice.)

CLARK

MELROE DIVISION • CLARK EQUIPMENT COMPANY • FARGO, ND 58102

632

CAPACITY

Rated Operating Capacity	LBS	1000
	KG	450
Tipping Load	LBS	2100
	KG	950
Hydraulic Pump Capacity	GPM	9.5
	LPM	36

DIMENSIONS

Length Less Bucket	IN	95.25
	MM	2420
Width Less Bucket	IN	53.5
	MM	1360
Height	IN	75.55
	MM	1920
Height to Bucket Pin	IN	108.6
	MM	2760

ENGINE

Make	Model	Fuel	Ford
			I4-98
Cylinders Displacement	IN ³	LITER	Gas
			Four
Fuel Tank Capacity	GAL	LITER	98
			1.6
Fuel Tank Capacity	GAL	LITER	10
			38

MACHINE WEIGHT

Shipping	LB	3400
	KG	1500

OPERATION

Steering and Drive — Forward, reverse and steering controlled by two hand levers.	
Transmission	Hydrostatic

SPECIAL FEATURES

Aux. Hydraulics	Std.
Bobtach	Std.
Brakes	Std.
Cab Enclosure	Opt.
Flotation Tires	Opt.
Lights	Std.
Operator Guard	Std.

ATTACHMENTS

Angle Broom	
Backhoe	
Grapple	
Pallet Fork	
Three Point Hitch	
Utility Forks	