

TECHNICAL DATA

SINGLE DIRECTION VIBRATORY PLATES

BP 18/45 E



Convenient

Start at the push of a button, low hand/arm vibrations, no exhaust emission



Robust and proven

Optimally protected, maintenance-free engine, full V-belt protection

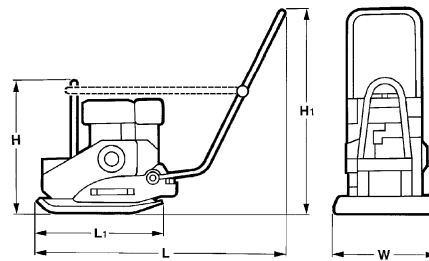


Straightforward handling

Battery change, guide handle folding, etc. can be carried out without tools

Shipping dimensions in cub.yd**BP 18/45 E**

0,184

**Standard Equipment**

- ☒ Comfort start
- ☒ Maintenance-free brushless electric motor
- ☒ Tool-free battery swap
- ☒ Protective covering
- ☒ Vibration insulated steering handle, foldable
- ☒ Detachable steering handle
- ☒ Highly wear resistant base plate
- ☒ Single point lifting device
- ☒ Fully protected V-belt
- ☒ Carrying handles
- ☒ 3-2-1 Warranty

Optional Equipment

- ☐ Battery eP 20 (20Ah)
- ☐ Battery eP 28 (28Ah)
- ☐ Standard charger
- ☐ Quick charger
- ☐ Sprinkler system (+15.4lb)
- ☐ Transport wheels (+8.8lb)
- ☐ Plastic mat
- ☐ Service Kit
- ☐ Special painting

Dimensions in inch

	H	H1	L	L1	W
BP 18/45 E	22.0	36.7	46.9	22.0	17.7

Technical Data**BOMAG
BP 18/45 E****Weights**

Operating weight CECE	lb	214
Basic weight	lb	192

Dimensions

Working width	in	17.7
---------------------	----	------

Driving Characteristics

Working speed, max.	ft/min	82.0
Max. gradeability (dep. on soil con.)	%	30

Drive

Engine type		Asynchronous motor
Emission stage		no emissions
Cooling		air
Performance	hp	4.2
Speed	rpm	4,350
Drive system		electric

Exciter system

Frequency	vpm	90
Centrifugal force	lb	4,047/899
Amplitude	in	0.073

Capacities

Water	gal	1.8
-------------	-----	-----

Electric equipment

battery, type		Li-Ion
Operating voltage	V	51
battery, type		Li-Ion
Operating voltage	V	51

Technical modifications reserved. Machines may be shown with options.



PRUS 630 18 010

030924 Sa01

BOMAG Americas, Inc.
125 Blue Granite Parkway
Ridgeway, SC 29130
USA
Tel. +1 803 3370700
Fax +1 803 3370800
www.bomag.com/us

