

TECHNICAL DATA

SINGLE DIRECTION VIBRATORY PLATES

BP 12/35



Compact

Guide handle without tool folding - fits in any car boot



Plug and Play retrofit kits


Assembly in no time at all - machine can be individually customised



All-round protection

Machine equipped with protective bar as standard

Shipping dimensions in cub.yd without cabinwith cabin
BP 12/35 0,200 0,308

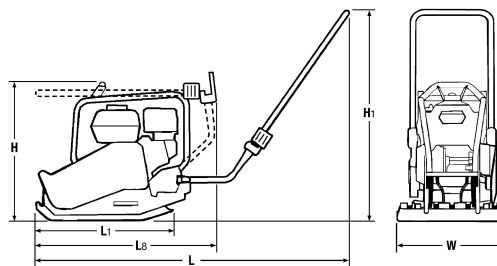

Standard Equipment

- ☒ Vibration insulated steering handle, foldable
- ☒ Detachable steering handle
- ☒ Hand-arm vibrations <5m/s²
- ☒ Automatic shutdown at low oil level
- ☒ Engine protection frame
- ☒ Highly wear resistant base plate
- ☒ Recoil starter
- ☒ Fully protected V-belt
- ☒ Carrying handles
- ☒ Single point lifting device
- ☒ 3-2-1 Warranty

Optional Equipment

- ☐ Sprinkler system (1.8gal)
- ☐ Spraying system, base plate (350mm)
- ☐ Transport wheels
- ☐ Vulcolan mat
- ☐ Hour meter
- ☐ Special painting
- ☐ Service Kit
- ☐ Tool kit

Dimensions in inch

	H	H1	L	L1	L8	W
BP 12/35	21.8	33.6	50.4	20.9	31.0	13.8

Technical Data

BOMAG BP 12/35

Weights

Operating weigh	lb	148
Basic weight	lb	148

Dimensions

Working width	in	13.8
---------------------	----	------

Driving Characteristics

Working speed, max.	ft/min	82.0
Max. gradeability (dep. on soil con.)	%	30

Drive

Engine manufacturer	Briggs&Stratton
Engine type	XR550
Emission stage	Stage V / CARB P.3
Cooling	air
Number of cylinders	1
Performance SAE J 1349	hp 3.5
Speed	rpm 3,600
Drive system	mech.
Fuel	Gasoline
Fuel comsump. aver. during operation	gal/h 0.2

Exciter system

Frequency	vpm	5,520.0/0.0
Centrifugal force	lb	2,698
Amplitude	in	0.069

Capacities

Fuel	gal	0.5
------------	-----	-----

Technical modifications reserved. Machines may be shown with options.



PRUS 630 08 010

260326 Sa

BOMAG Americas, Inc.
 125 Blue Granite Parkway
 Ridgeway, SC 29130
 USA
 Tel. +1 803 3370700
 Fax +1 803 3370800
www.bomag.com/us

