

TECHNICAL DATA

BOMAG Screed

S 500-2 TV



Greatest durability



Shorter set-up times

Technical Data

BOMAG S 500-2 TV


Screed

Max. working width.....mm	9000
Roof profile.....%	-2.5 +4.5
Basic weight.....kg	4400
Basic width retracted.....mm	2550
Basic width extended.....mm	5000
min. width with reducing shoes.....mm	1650
Placement thickness.....mm	300
Screed/sole plate length.....mm	400
Screed/sole plate thickness.....mm	15
Heating.....	electric
Tamper frequency.....Hz	30
Vibration frequency.....Hz	60

Mechanical extensions

Attachment element 1.....mm	250
Attachment element 2.....mm	750
Attachment element 3.....mm	1250

Technical modifications reserved. Machines may be shown with options.

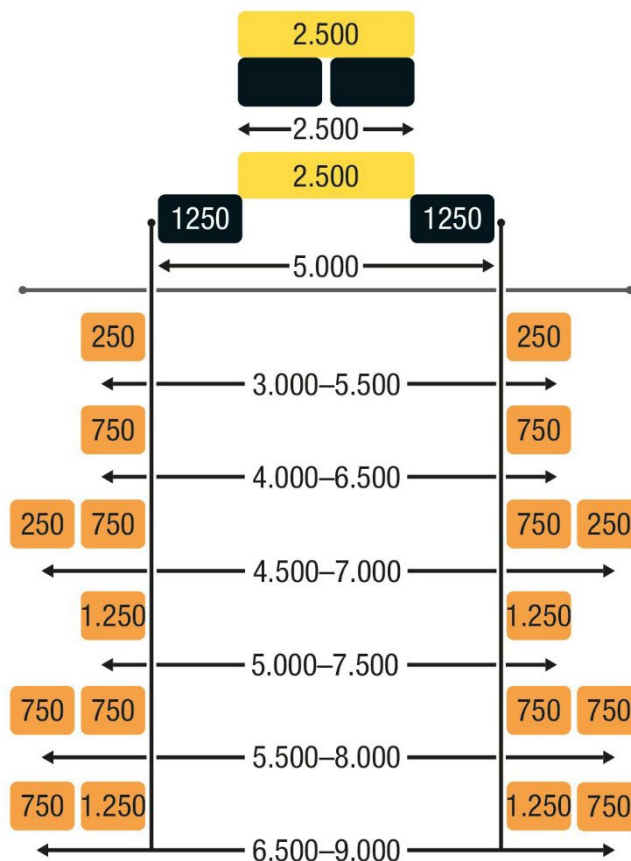

PRE89502010

081025 Sa

BOMAG
Hellerwald
D-56154 Boppard
Postfach 5162
D-56149 Boppard
Tel. (+49) 6742 - 1000
Fax (+49) 6742 - 3090

