

TECHNICAL DATA

BOMAG Screed

S 340-5 V



Greatest durability



Shorter set-up times

Technical Data

BOMAG S 340-5 V


Screed

Max. working width	mm	5000
Roof profile	%	-2.5 +4.5
Basic weight	kg	1710
Basic width retracted	mm	1700
Basic width extended	mm	3400
min. width with reducing shoes	mm	700
Placement thickness	mm	250
Screed/sole plate length	mm	330
Screed/sole plate thickness	mm	10
Heating		electric
Tamper frequency	Hz	NA
Vibration frequency	Hz	50


Mechanical extensions

Attachment element 1	mm	300
Attachment element 2	mm	500

Technical modifications reserved. Machines may be shown with options.

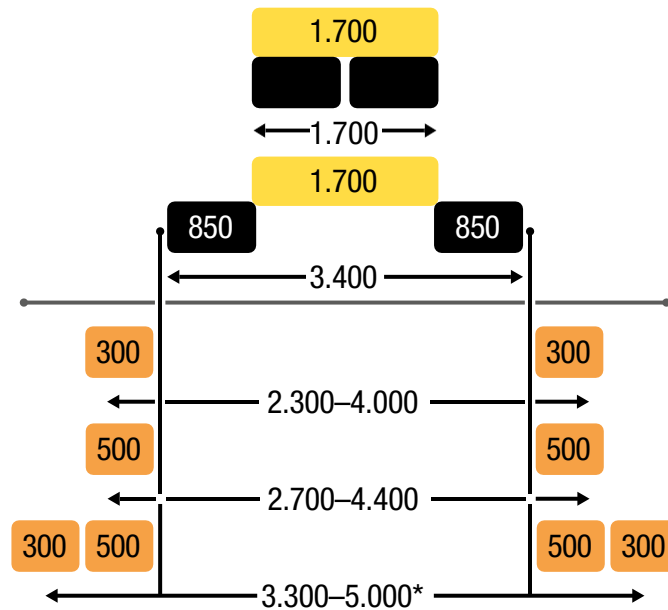

*C-Version



PRE89407010

081025 Sa

BOMAG
Hellerwald
D-56154 Boppard
Postfach 5162
D-56149 Boppard
Tel. (+49) 6742 - 1000
Fax (+49) 6742 - 3090

