

TECHNICAL DATA

SINGLE DIRECTION VIBRATORY PLATES

BP 15/40



Compact

Guide handle without tool folding - fits in any car boot



Plug and Play retrofit kits

Assembly in no time at all - machine can be individually customised



All-round protection

Protective bar and cyclone filter (GX 160) as standard

Shipping dimensions in cub.yd

BP 15/40


0,233

Standard Equipment

- ☒ Vibration insulated steering handle, foldable
- ☒ Detachable steering handle
- ☒ Hand-arm vibrations <5m/s²
- ☒ Cyclone dust separator
- ☒ Engine protection frame
- ☒ Automatic shutdown at low oil level
- ☒ Highly wear resistant base plate
- ☒ Recoil starter
- ☒ Fully protected V-belt
- ☒ Carrying handles
- ☒ Single point lifting device
- ☒ 3-2-1 Warranty

Optional Equipment

- ☐ Sprinkler system (2.6gal)
- ☐ Sprinkler system (1.8gal)
- ☐ Spraying system, base plate (15.7in)
- ☐ Transport wheels
- ☐ Vulcolan mat
- ☐ Hour meter
- ☐ Special painting
- ☐ Service Kit
- ☐ Tool kit

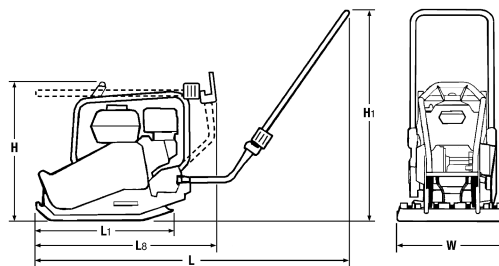

Dimensions in inch

	H	H1	L	L1	L8	W
BP 15/40	22.3	33.9	50.2	22.0	31.1	15.7

Technical Data

BOMAG BP 15/40

Weights

Operating weight CECE	lb	183
Basic weight	lb	183

Dimensions

Working width	in	15.7
---------------------	----	------

Driving Characteristics

Working speed, max.	ft/min	98.4
Max. gradeability (dep. on soil con.)	%	30

Drive

Engine manufacturer	Honda	
Engine type	GX 160	
Emission stage	Stage V / CARB P.3	
Cooling	air	
Number of cylinders	1	
Performance SAE J 1349	hp	4.8
Speed	rpm	3,600
Drive system	mech.	
Fuel	Gasoline	
Fuel consump. aver. during operation	gal/h	0.3

Exciter system

Frequency	vpm	5,400.0/0.0
Centrifugal force	lb	3,372
Amplitude	in	0.068

Capacities

Fuel	gal	0.8
------------	-----	-----

Technical modifications reserved. Machines may be shown with options.



PRUS 834 95 010

080725 Sa

BOMAG Americas, Inc.
125 Blue Granite Parkway
Ridgeway, SC 29130
USA
Tel. +1 803 3370700
Fax +1 803 3370800
www.bomag.com/us

