

TECHNICAL DATA

BOMAG Screed

S 600-2 TV



Greatest durability



Shorter set-up times

Technical Data

BOMAG S 600-2 TV


Screed

Max. working width.....mm	10000
Roof profile%	-2.5 +4.5
Basic weightkg	4900
Basic width retractedmm	3000
Basic width extendedmm	6000
min. width with reducing shoesmm	2100
Placement thicknessmm	300
Screed/sole plate lengthmm	400
Screed/sole plate thicknessmm	15
Heating	electric
Tamper frequencyHz	30
Vibration frequencyHz	60

Mechanical extensions

Attachment element 1.....mm	250
Attachment element 2.....mm	750
Attachment element 3.....mm	1250

Technical modifications reserved. Machines may be shown with options.

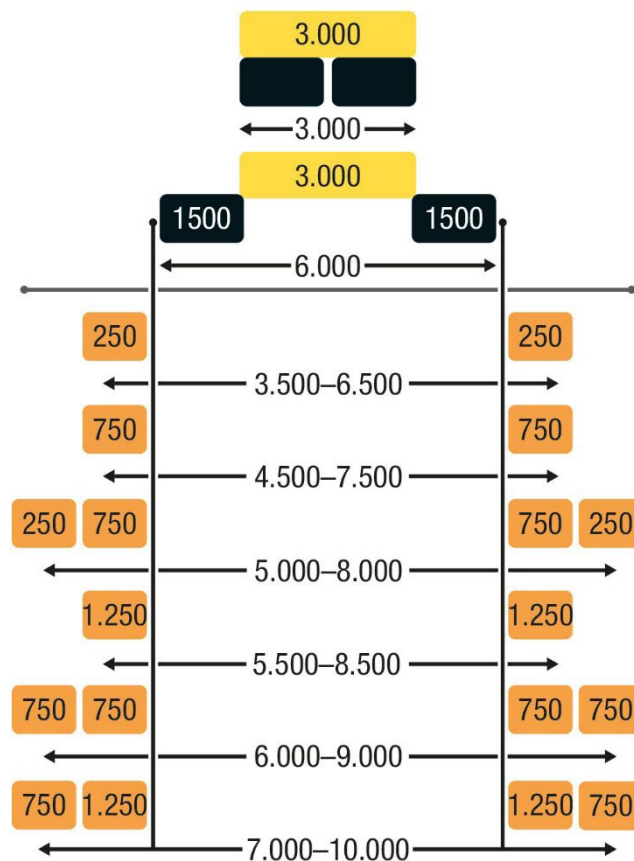

PRE89503010

081025 Sa

BOMAG
Hellerwald
D-56154 Boppard
Postfach 5162
D-56149 Boppard
Tel. (+49) 6742 - 1000
Fax (+49) 6742 - 3090

