

TECHNICAL DATA

SINGLE DIRECTION VIBRATORY PLATES

BVP 10/36



Compact

Guide handle fully foldable



Robust and reliable

V-belt all around protected against damage

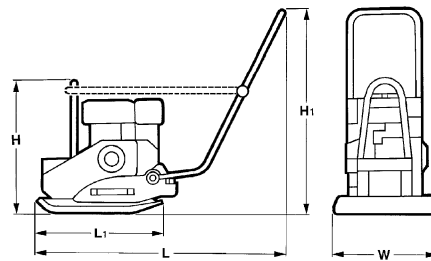


Safe transport

Transport handles (standard) and transport wheels (optional)

Shipping dimensions in cub.yd**BVP 10/36**

0,192

**Standard Equipment**

- ☒ Vibration insulated steering handle, foldable
- ☒ Detachable steering handle
- ☒ Highly wear resistant base plate
- ☒ Automatic shutdown at low oil level
- ☒ Recoil starter
- ☒ Single point lifting device
- ☒ Fully protected V-belt
- ☒ Carrying handles
- ☒ 3-2-1 Warranty

Optional Equipment

- ☐ Sprinkler system (+15.4lb)
- ☐ Transport wheels (+8.8lb)
- ☐ Plastic mat
- ☐ Tool kit
- ☐ Service Kit
- ☐ TOUGH WARRANTY
- ☐ Comfort guide handle
- ☐ Special painting
- ☐ Engine protection frame

Dimensions in inch

	H	H1	L	L1	W
BVP 10/36	21.1	36.0	43.9	22.0	14.2

Technical Data**BOMAG
BVP 10/36****Weights**

Operating weight CECE	lb	183
Basic weight	lb	181

Dimensions

Working width	in	14.2
---------------------	----	------

Driving Characteristics

Working speed, max.	ft/min	82.0
Max. gradeability (dep. on soil con.)	%	30

Drive

Engine manufacturer	Honda
Type	GX 120
Emission stage	Stage V / CARB P.3
Cooling	air
Number of cylinders	1
Performance SAE J 1349	hp 3.5
Speed	rpm 3,600
Drive system	mech.
Fuel	Gasoline
Fuel comsump. aver. during operation	gal/h 0.2

Exciter system

Frequency	vpm	90
Centrifugal force	lb	2,248/495
Amplitude	in	0.054

Capacities

Fuel	gal	0.5
Water	gal	1.8

Technical modifications reserved. Machines may be shown with options.



PRUS 834 13 010

030423 Sa03

BOMAG Americas, Inc.
125 Blue Granite Parkway
Ridgeway, SC 29130
USA
Tel. +1 803 3370700
Fax +1 803 3370800
www.bomag.com/us

