


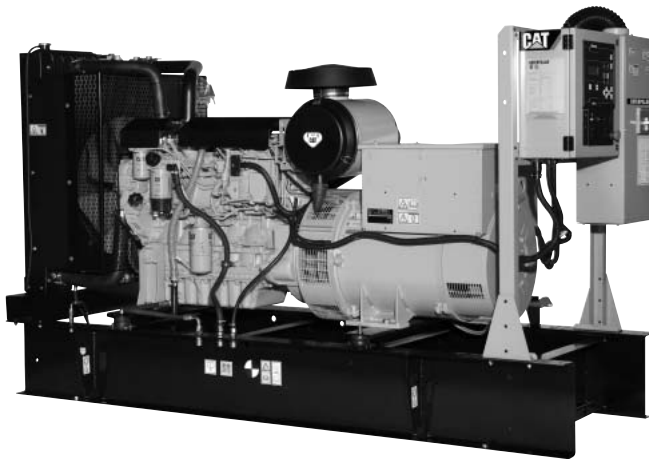

Picture shown may not reflect actual package

STANDBY 125-150 kW
PRIME 114-135 kW

60 Hz

Model	Standby kW (kVA)	Prime kW (kVA)
D125-6	125 (156.3)	114 (142.5)
D150-8	150 (187.5)	135 (168.8)

Tier 3 EPA Approved, Emissions Certified

FEATURES

GENERATOR SET

- Complete system designed and built at ISO 9001 certified facilities
- Factory tested to design specifications at full load conditions

ENGINE

- Governor, electronic
- Electrical system, 12 VDC
- Cartridge type filters
- Battery rack and cables
- Coolant and lube drains piped to edge of base

GENERATOR

- Insulation system, class H
- Drip proof generator air intake (NEMA 2, IP23)
- Electrical design in accordance with BS5000 Part 99, EN61000-6, IEC60034-1, NEMA MG-1.33

CONTROL SYSTEM

- EMCP 3.1 digital control panel
- Vibration isolated NEMA 1 enclosure with lockable hinged door
- DC and AC wiring harnesses

MOUNTING ARRANGEMENT

- Heavy-duty fabricated steel base with lifting points
- Anti-vibration pads to ensure vibration isolation
- Complete OSHA guarding
- Stub-up pipe ready for connection to silencer pipework
- Flexible fuel lines to base with NPT connections

COOLING SYSTEM

- Radiator and cooling fan complete with protective guards
- Standard ambient temperatures up to 50° C (122° F)

CIRCUIT BREAKER

- UL/CSA listed
- 3-pole with solid neutral
- NEMA 1 steel enclosure, vibration isolated
- Electrical stub-up area directly below circuit breaker

AUTOMATIC VOLTAGE REGULATOR

- Voltage within $\pm 0.5\%$ 3-phase at steady state from no load to full load
- Provides fast recovery from transient load changes

EQUIPMENT FINISH

- All electroplated hardware
- Anticorrosive paint protection
- High gloss polyurethane paint for durability and scuff resistance

QUALITY STANDARDS

- BS4999, BS5000, BS5514, EN61000-6, IEC60034, NEMA MG-1.33, NFPA 110 (with optional equipment)

DOCUMENTATION

- Operation and maintenance manuals provided
- Wiring diagrams included

WARRANTY

- All equipment carries full manufacturer's warranty.

OPTIONAL EQUIPMENT*

ENCLOSURE

- B Series weather protective enclosure (includes internal silencer system)
- Sound attenuated enclosure (includes internal silencer system)
 - Single point lift
 - Panel viewing window
 - External emergency stop pushbutton

SILENCER SYSTEM – OPEN UNIT

- Level 1 silencer
- Level 2 silencer
- Level 3 silencer
- Mounting kit
- Through-wall installation kits

ENGINE

- Battery heater
- Lube oil drain pump
- High lube oil temperature shutdown
- Lube oil sump heater

CIRCUIT BREAKER

- Auxiliary voltfree contacts
- Shunt trip

GENERATOR

- Anti-condensation heater
- Permanent magnet generator
- AREP excitation system
- Generator upgrade 1 size

CONTROL SYSTEM

- No control system
- EMCP 3.2 digital control panel

MOUNTING ACCESSORIES

- Seismic (Zone 4) vibration isolators

FUEL SYSTEM

- UL listed closed top-diked skid-mounted fuel tank base (12/24-hour capacity) with fuel alarm (low level/leak detected)
- Critical high fuel alarm
- Critical low fuel level shutdown

COOLING SYSTEM

- Coolant heater
- Low coolant temperature alarm
- Low coolant level shutdown
- Radiator transition flange

REMOTE ANNUNCIATORS

- 16-channel remote annunciator panel (supplied loose)

MISCELLANEOUS ACCESSORIES

- Toolkit
- Additional operator's manual pack
- Special enclosure color
- UL listing
- CSA certification
- French or Spanish language labels

EXTENDED SERVICE CONTRACTS


- Extended Service Coverage available

* Some options may not be available on all models.
Not all options are listed.

STANDBY 125-150 kW
PRIME 114-135 kW
60 Hz



GENERATOR SET DIMENSIONS AND WEIGHTS

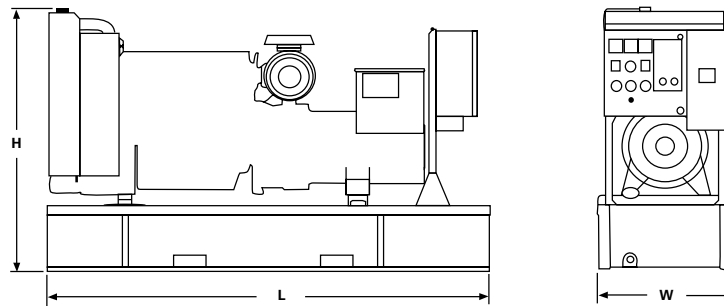

Model	Length mm (in)	Width mm (in)	Height mm (in)	Weight kg (lb)*
D125-6	2780 (109.4)	900 (35.4)	1543 (60.7)	1347 (2,970)
D150-8	2780 (109.4)	900 (35.4)	1543 (60.7)	1407 (3,102)

NOTE: General configuration not to be used for installation. See specific dimensional drawings for detail.

*Includes oil and coolant

SPECIFICATIONS



GENERATOR

Voltage regulation	± 0.5% 3-phase at steady state from no load to full load
Frequency	± 0.25% for constant load, no load to full load
Waveform distortion	THD < 4%, at no load
Radio interference	Compliance with EN61000-6
Telephone interference	TIF < 50, THF < 2%
Overspeed limit	2250 rpm
Insulation	Class H
Temperature rise	Within Class H limits
Available voltages	277/480, 266/460, 120/240, 127/220, 120/208, 347/600
Deration	Consult factory for available outputs
Ratings	At 30° C (86° F), 152.4 m (500 ft), 60% humidity, 0.8 pf



ENGINE

Manufacturer	Caterpillar
Type	4-cycle
Bore – mm (in)	105.0 (4.13)
Stroke – mm (in)	127.0 (5.00)
Governor Type	Electronic
Class	G2
Piston speed – m/sec (ft/sec)	7.62 (25.0)
Engine speed – rpm	1800
Air cleaner type	Dry, replaceable paper element type with restriction indicator

D125-6 – C6.6 ACERT

Aspiration	ATAAC
Cylinder configuration	In-line 6
Displacement – L (cu in)	6.6 (404)
Compression ratio	16.3:1
Max power at rated rpm – kW (hp)	
Standby	161.6 (217)
Prime	144.6 (194)
BMEP – kPa (psi)	
Standby	1633 (237)
Prime	1461 (212)
Regenerative power – kW (hp)	14.9 (20)

D150-8 – C6.6 ACERT

Aspiration	ATAAC
Cylinder configuration	In-line 6
Displacement – L (cu in)	6.6 (404)
Compression ratio	16.3:1
Max power at rated rpm – kW (hp)	
Standby	171.3 (230)
Prime	154.4 (207)
BMEP – kPa (psi)	
Standby	1731 (251)
Prime	1560 (226)
Regenerative power – kW (hp)	14.9 (20)



CONTROL PANEL

- Heavy duty sheet steel enclosure with lockable hinged door
- Vibration isolated from generating set
- LCD display
- AC metering
- DC metering
- Fail to start shutdown
- Low oil pressure shutdown
- High engine temperature
- Low/high battery voltage
- Underspeed/overspeed
- Loss of engine speed detection
- 2 spare fault channels
- 20 event fault log
- 2 LED status indicators
- Lockdown emergency stop push button

RATING DEFINITIONS AND CONDITIONS

Standby – Applicable for supplying continuous electrical power (at variable load) in the event of a utility power failure. No overload is permitted on these ratings. The generator is peak rated (as defined in ISO8528-3).

Prime – Applicable for supplying continuous electrical power (at variable load) in lieu of commercially purchased power. There is no limitation to the annual hours of operation and the generator set can supply 10 percent overload power for 1 hour in 12 hours.

D125-6 (3-Phase)

Materials and specifications are subject to change without notice.

Generator Set Technical Data – 1800 rpm/60 Hz			Standby		Prime	
Power Rating	kW	kVA	125	156.3	114	142.5
Lubricating System Type: full pressure Oil filter: spin-on, full flow Oil cooler: watercooled Oil type required: API CH4/CI4 Total oil capacity Oil pan	L L	U.S. gal U.S. gal	16.5 15.5	4.4 4.1	16.5 15.5	4.4 4.1
Fuel System Generator set fuel consumption 100% load 75% load 50% load	L/hr L/hr L/hr	gal/hr gal/hr gal/hr	40.6 31.6 24.5	10.7 8.3 6.5	36.0 30.0 23.2	9.5 7.9 6.1
Engine Electrical System Voltage/ground: 12/negative Battery charging generator ampere rating	amps		100		100	
Cooling System Water pump type: centrifugal Radiator system capacity incl. engine Maximum coolant static head Coolant flow rate Minimum temperature to engine Temperature rise across engine Heat rejected to coolant at rated power Total heat radiated to room at rated power Radiator fan load	L m H ₂ O L/hr °C °C kW kW kW	U.S. gal ft H ₂ O U.S. gal/hr °F °F Btu/min Btu/min hp	21.0 8.0 10 200 85 7.9 74.9 13.0 8.0	5.5 26.0 2,693 185 14.2 4,262 740 10.7	21.0 8.0 10 200 85 7.9 69.8 12.1 8.0	5.5 26.0 2,693 185 14.2 3,971 688 10.7
Air Requirements Combustion air flow Maximum air cleaner restriction Radiator cooling air (zero restriction) Generator cooling air Allowable air flow restriction (after radiator) Cooling air flow (@ rated speed) Rate with restriction	m³/min kPa m³/min m³/min kPa m³/min	cfm in H ₂ O cfm cfm in H ₂ O cfm	12.6 5 327 26.4 0.12 317	445 20 11,548 923 0.50 11,195	12.3 5 327 26.4 0.12 317	434 20 11,548 923 0.50 11,195
Exhaust System Maximum allowable backpressure Exhaust flow at rated kW Exhaust temperature at rated kW – Dry exhaust	kPa m³/min °C	in Hg cfm °F	15 29.7 437	4.4 1,049 819	15 28.6 427	4.4 1,010 801
Generator Set Noise Rating* (without attenuation) at 1 m (3 ft)	dB(A)		97		97	

Generator Technical Data		277/480V	266/460V	127/220V	120/240V 120/208V	347/600V
Motor Starting Capability: (kVA)						
(30% voltage dip)						
Self excited		360	335	311	283	N/A
PM excited**		469	437	406	370	437
AREP excited		469	437	406	370	437
Full Load Efficiencies:						
Standby		92.7	92.6	92.5	92.3	92.6
Prime		92.8	92.8	92.7	92.5	92.8
Reactances (per unit):						
X _d		2.74	2.99	3.27	3.65	2.99
X _d [']		0.10	0.10	0.11	0.13	0.10
Reactances shown are applicable to the standby rating.						
X _d ["]		0.057	0.062	0.068	0.076	0.062
X _q		1.65	1.79	1.96	2.19	1.79
X _q ["]		0.068	0.074	0.080	0.090	0.074
X ₂		0.063	0.068	0.075	0.083	0.068
X ₀		0.004	0.005	0.005	0.006	0.005
Time Constants:		t _d 100 ms	t _d 10 ms	t _{do} 2865 ms	t _a 15 ms	

* dB(A) levels are for guidance only

** With PMG Excited Option AVR12

D150-8 (3-Phase)

Materials and specifications are subject to change without notice.

Generator Set Technical Data – 1800 rpm/60 Hz			Standby		Prime	
Power Rating	kW	kVA	150	187.5	135	168.8
Lubricating System Type: full pressure Oil filter: spin-on, full flow Oil cooler: watercooled Oil type required: API CH4/CI4 Total oil capacity Oil pan						
	L	U.S. gal	16.5	4.4	16.5	4.4
	L	U.S. gal	15.5	4.1	15.5	4.1
Fuel System Generator set fuel consumption 100% load 75% load 50% load						
	L/hr	gal/hr	44.7	11.8	41.5	11.0
	L/hr	gal/hr	36.8	9.7	34.3	9.1
	L/hr	gal/hr	28.4	7.5	26.6	7.0
Engine Electrical System Voltage/ground: 12/negative Battery charging generator ampere rating						
		amps	100		100	
Cooling System Water pump type: centrifugal Radiator system capacity incl. engine Maximum coolant static head Coolant flow rate Minimum temperature to engine Temperature rise across engine Heat rejected to coolant at rated power Total heat radiated to room at rated power Radiator fan load						
	L	U.S. gal	21.0	5.5	21.0	5.5
	m H ₂ O	ft H ₂ O	8.0	26.0	8.0	26.0
	L/hr	U.S. gal/hr	10 200	2,693	10 200	2,693
	°C	°F	85	185	85	185
	°C	°F	7.9	14.2	7.9	14.2
	kW	Btu/min	78.4	4,461	73.5	4,182
	kW	Btu/min	13.6	774	12.7	723
	kW	hp	8.0	10.7	8.0	10.7
Air Requirements Combustion air flow Maximum air cleaner restriction Radiator cooling air (zero restriction) Generator cooling air Allowable air flow restriction (after radiator) Cooling airflow (@ rated speed) Rate with restriction	m³/min	cfm	12.9	456	12.6	445
	kPa	in H ₂ O	5	20	5	20
	m³/min	cfm	327	11,548	327	11,548
	m³/min	cfm	26.4	923	26.4	923
	kPa	in H ₂ O	0.12	0.50	0.12	0.50
	m³/min	cfm	317	11,195	317	11,195
Exhaust System Maximum allowable backpressure Exhaust flow at rated kW Exhaust temperature at rated kW – Dry exhaust	kPa	in Hg	15	4.4	15	4.4
	m³/min	cfm	31.5	1,112	30.5	1,077
	°C	°F	625	1,157	610	1,130
Generator Set Noise Rating* (without attenuation) at 1 m (3 ft)		dB(A)	97.3		97.3	

Generator Technical Data		277/480V	266/460V	127/220V	120/240V 120/208V	347/600V
Motor Starting Capability: (kVA) (30% voltage dip)	Self excited	420	391	363	330	N/A
	PM excited**	548	511	476	433	511
	AREP excited	548	511	476	433	511
Full Load Efficiencies:	Standby	92.9	92.9	92.9	92.5	92.9
	Prime	93.1	93.1	93.1	92.8	93.1
Reactances (per unit): Reactances shown are applicable to the standby rating.	X _d	2.90	3.16	3.45	3.86	3.16
	X' _d	0.10	0.11	0.12	0.13	0.11
	X'' _d	0.058	0.063	0.069	0.078	0.063
	X _q	1.74	1.89	2.07	2.32	1.89
	X'' _q	0.069	0.075	0.082	0.092	0.075
	X ₂	0.063	0.069	0.075	0.084	0.069
	X ₀	0.005	0.005	0.006	0.007	0.005
Time Constants:		t' _d 100 ms	t'' _d 10 ms	t' _{do} 2966 ms	t _a 15 ms	

* dB(A) levels are for guidance only

** With PMG Excited Option AVR12

STANDBY 125-150 kW
PRIME 114-135 kW
60 Hz



This page intentionally left blank.

STANDBY **125 - 150 kW**
PRIME **114 - 135 kW**
60 Hz



This page intentionally left blank.

Information contained in this publication may be considered confidential.

Discretion is recommended when distributing.

Materials and specifications are subject to change without notice.

CAT, CATERPILLAR, their respective logos and "Caterpillar Yellow" and the POWER EDGE trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

www.cat-electricpower.com

© 2007 Caterpillar
All Rights Reserved.
Printed in U.S.A.