

**FOLDS FOR
EASY
TRANSPORTING**



MODEL NO.
6507R1830A3

LARGE 10" DIA.
SEMI-PNEUMATIC
WHEELS

SERIES 6500

WELDED STEEL ROLL-N-FOLD LADDER

THE COTTERMAN SERIES 6500 ROLL-N-FOLD LADDER is a portable steel safety ladder that can be folded for transporting. The rear of the ladder has large 10" diameter semi-pneumatic wheels allowing it to roll easily. Large rubber pads on the front legs hold the ladder secure during use. The ladder is moved by tilting and rolling it like a wheelbarrow. The B4 safelock is standard on 10-16 step models, but also available on 5-9 step models for additional charge.


FEATURES:

- Rigid 1" O.D. tubular frame is designed to be folded.
- Large 10" diameter ball bearing semi-pneumatic wheels are mounted on heavy 3/4" axles.
- Treads are 7" deep and 16" wide, and are available in A1 expanded metal or A3 Grip Strut. The standard top step is 10" deep and 16" wide, deep tops are 20" deep by 16" wide.
- Gray powder coat is the standard finish. Beige, dark brown, yellow, black, green, blue, red, white, orange and light gray are available.
- Series 6500 ladders comply with OSHA 1910.29 and ANSI A14.7 standards with a 300 lb. load rating. Cal-OSHA models also available.

NO. STEPS INCL. TOP STEP	TOP STEP HEIGHT	OVERALL HEIGHT W/RAILS	BASE W"xL"	APPR. FOLDED DIMENSIONS W"xL"xH"	SHPG. WT.	MODEL NO.
5	50"	80"	30x46	32x86x24	85	6505R1830
6	60"	90"	30x53	32x98x24	95	6506R1830
7	70"	100"	30x58	32x110x24	105	6507R1830
8	80"	110"	30x65	32x122x24	127	6508R1830
9	90"	120"	30x72	32x134x24	158	6509R1830
10	100"	130"	30x78	32x146x24	175	6510R1830
11	110"	140"	30x86	32x158x24	190	6511R1830
12	120"	162"	30x92	32x176x36	203	*6512R1830
13	130"	172"	40x99	42x188x36	475	*6513R1840
14	140"	182"	40x106	42x200x36	545	*6514R1840
15	150"	192"	40x112	42x212x36	585	*6515R1840
16	160"	202"	40x119	42x224x36	610	*6516R1840

*These models are palletized for shipment at additional cost.

Option B4 safelock is available on 5-9 step models at additional cost, but is standard on 10 step and up.

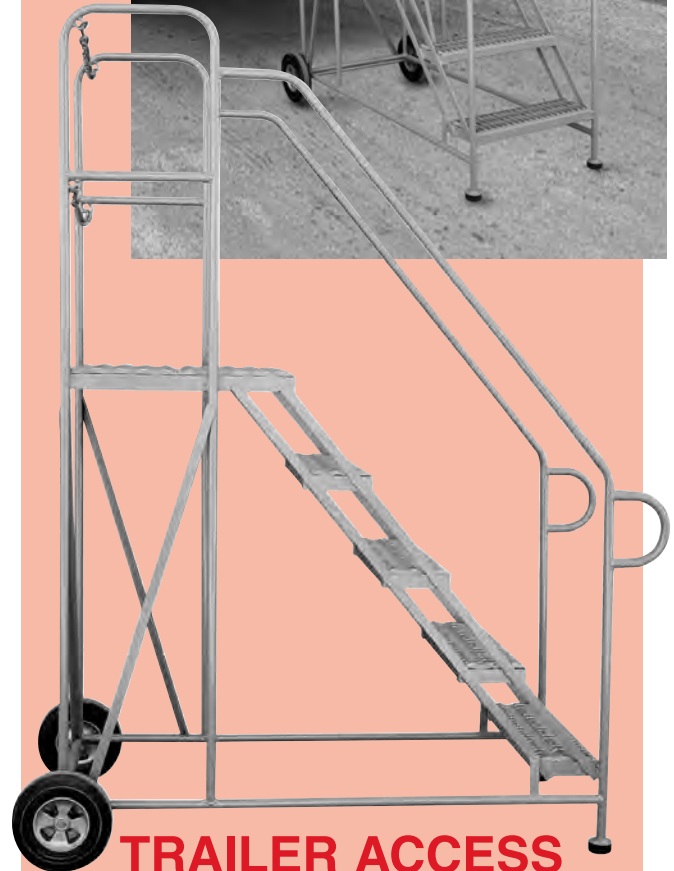

TRAILER ACCESS LADDER

The new trailer access ladder offers easy entry to tractor and cube vans in places where loading docks and bays are not available or convenient. The 5 step (50" top step height) ladder can be moved easily on (2) two 10" semi-pneumatic rear wheels and is provided with slip resistant heavy duty grip strut treads. The easy 50 degree climbing angle permits forward descent to comply with ANSI standards.

FEATURES:

- Steps and platform are constructed of heavy-duty non-slip grip strut, supported by 1" O.D. tubular frame
- Two heavy-duty 10" semi-pneumatic rear wheels with large 2 1/2" rubber pads on front legs
- 800 pound load rating exceeds OSHA 1910.29 and ANSI A14.7 standards
- Gray powder coat finish is standard
- Full 36" high handrails with removable snap hook chains
- Cal-OSHA model also available

Model #5TAP2424R

Step width 24", platform size 24"x24", base dim. 30"Wx60"L