



mainline
ACCESS • HANDLING • PLANT • TRAINING

National Hire Desk: 0345 222 33 44
Email: hiredesk@mainlinegroup.com
Visit: www.mainline-hire.co.uk
Follow: [in](#) [f](#) [t](#)

SPECIFICATION

	JCPT0607A		JCPT0607B		JCPT0607C	
Size	Metric	British	Metric	British	Metric	British
Max. Working Height	5.90m	19ft 4in	5.90m	19ft 4in	5.90m	19ft 4in
Max. Platform Height	3.90m	12ft 10in	3.90m	12ft 10in	3.90m	12ft 10in
Overall Length	1.44m	4ft 9in	1.30m	4ft 3in	1.31m	4ft 3in
Overall Width	0.76m	2ft 6in	0.76m	2ft 6in	0.75m	2ft 5in
Overall Height	1.96m	6ft 5in 5ft 1in	1.92m	6ft 4in 5ft	1.88m	6ft 2in
Platform Size (Length x Width)	1.29m×0.70m	3ft 7in	1.15m×0.70m	3ft 9in×2ft 4in	1.15m×0.66m	3ft 9in×2ft 2in
Ground Clearance (Stowed/Raised)	0.06m	6ft 5in 5ft 1in	0.06m	2in	0.075m	3in
Wheelbase	1.10m	4ft 3in×2ft 4in 2in	1.01m	3ft 4in	0.99m	3ft 3in
Tyres	φ150×50mm	φ150×50mm	φ150×50mm	φ150×50mm	φ200×50mm	φ200×50mm
Overall Weight	530kg	1168lb	480kg	1058lb	480kg	1058lb

SPECIFICATIONS


Size	Metric	British
Max. Working Height A	5.90m	19ft 4in
Max. Platform Height B	3.90m	12ft 10in
Overall Length C	1.44m	4ft 9in
Overall Width D	0.76m	2ft 6in
Overall Height(Rails Up) E	1.96m	6ft 5in
Overall Height(Rails Down) F	1.56m	5ft 1in
Platform Size(Length×Width)	1.29m×0.70m	4ft 3in×2ft 4in
Ground Clearance(Stowed/Raised)	0.06m	2in
Wheelbase H	1.10m	3ft 7in
Tyres	φ150×50mm	φ150×50mm

Performance		
S.W.L	240kg	529lb
Max. Occupants	1	1
Max. Working Slope	1°	1°
Up/Down Speed	38/25sec	38/25sec

Weight		
Overall Weight	530kg	1168lb

Power		
Hydraulic Tank	3L	3L
Battery	12V/85Ah	12V/85Ah
Charger	12V/15A	12V/15A
Lifting Motor	12VDC/0.8kW	12VDC/0.8kW

* The platform height plus 2m (7ft in British standard) is the working height.
Standards Compliance

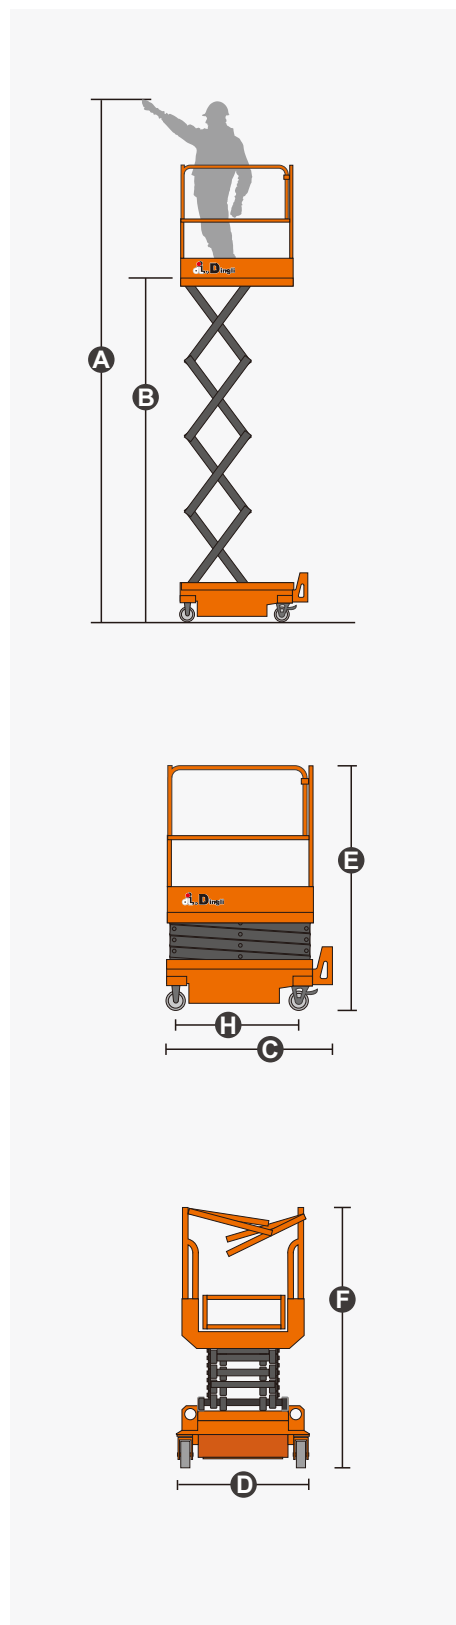

FEATURES

Standard Items

- Self-Locking Gates
- Four-Wheel Braking
- Emergency Descent System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Safety Arm For Troubleshooting
- Standard Transport Forklift Holes
- Charging Protection System
- Flashing LED Beacon
- Automatic One-Way Platform Extension Deck
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Platform Load Sense System

Optional Items

- Factory Hydraulic Oil**
- No. 46 Hydraulic Oil (Mineral Oil)**

Additional Items

- Biodegradable Hydraulic Oil
- AC Power Cord to Platform
- Air Line to Platform

** Factory Default, If You Have Other Needs, Please Inform Dingli Regional Sales.

ZHEJIANG DINGLI MACHINERY CO., LTD.

No.188 Qihang Road,Deqing,Zhejiang P.R.China 313219

Telephone +86(572)8681688

Fax +86(572)8681960

E-Mail export@cndingli.com

[Http://www.cndingli.com](http://www.cndingli.com)






SPECIFICATIONS

Size	Metric	British
Max. Working Height A	5.90m	19ft 4in
Max. Platform Height B	3.90m	12ft 10in
Overall Length C	1.30m	4ft 3in
Overall Width D	0.76m	2ft 6in
Overall Height(Rails Up) E	1.92m	6ft 4in
Overall Height(Rails Down) F	1.52m	5ft
Platform Size(Length×Width)	1.15m×0.70m	3ft 9in×2ft 4in
Ground Clearance	0.06m	2in
Wheelbase H	1.01m	3ft 4in
Tyres	φ150×50mm	φ150×50mm

Performance		
S.W.L	240kg	529lb
Max. Occupants (Indoor/Outdoor)	1/0	1/0
Max. Working Slope	X-1°/Y-1°	X-1°/Y-1°
Up/Down Speed	23/21sec	23/21sec

Weight		
Overall Weight	480kg	1058lb

Power		
Hydraulic Tank	3L	0.8gal
Battery	12V/85Ah	12V/85Ah
Charger	12V/15A	12V/15A
Lifting Motor	12VDC/0.8kW	12VDC/0.8kW

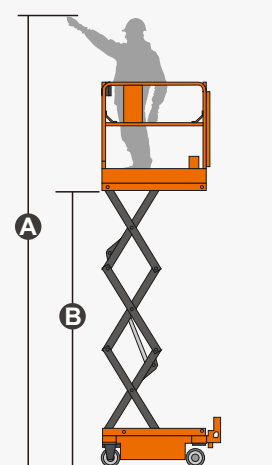

FEATURES

Standard Items

- Self-Locking Gates
- Automatic Braking System
- Emergency Descent System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Safety Arm For Troubleshooting
- Standard Transport Forklift Holes
- Charging Protection System
- Flashing LED Beacon
- Charging Indicator
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Platform Load Sense System
- Emergency Stop Button



ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deqing, Zhejiang P.R.C 313219

Telephone: +86(572)8681688

E-Mail: export@cndingli.com

<https://en.cndingli.com>

Due to continuous technology updates, technical parameters are subject to change without notice. This picture book is for reference only, the actual product shall prevail. The copyright is owned by zhejiang dingli, any content may not be copied for any purpose without written permission.

2025-03






SPECIFICATIONS

Dimension	Metric	British
Max. Working Height A	5.90m	19ft 4in
Max. Platform Height B	3.90m	12ft 10in
Overall Length C	1.31m	4ft 3in
Overall Width D	0.75m	2ft 5in
Overall Height E	1.88m	6ft 2in
Platform Size(Length ×Width)	1.15m×0.66m	3ft 9in×2ft 2in
Ground Clearance(Stowed/Raised)	0.075m	3in
Wheelbase H	0.99m	3ft 3in
Tyres	φ200×50mm	φ200×50mm

Performance		
S.W.L	240kg	529lb
Max. Occupants(Indoor/Outdoor)	1/0	1/0
Max. Working Slope(X/Y)	1°/1°	1°/1°
Up/Down Speed	26/21sec	26/21sec

Weight		
Overall Weight	480kg	1058lb

Power		
Hydraulic Tank	3L	0.8gal
Lead-acid Battery	12V/85Ah	12V/85Ah
Charger	12V/15A	12V/15A
Lifting Motor	12VDC/0.8kW	12VDC/0.8kW

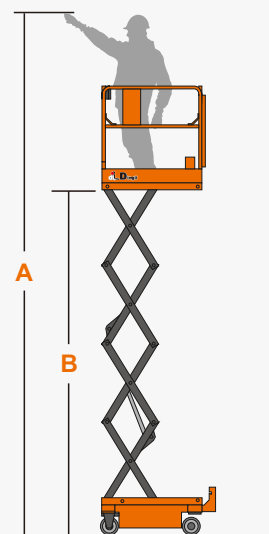

FEATURES

Standard Items

- Self-lock Gate On Platform
- Fixed Guardrails
- Automatic Brake System
- Emergency Descent System
- Cylinder Holding Valve
- Onboard Diagnostic System
- Tilt Alarm
- All Motion Alarm
- Horn
- Hour Meter
- Safety Arm For Troubleshooting
- Standard Transport Forklift Holes
- Charging Protection System
- Flashing LED Beacon
- Charging Indicator
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Platform Load Sense System
- Emergency Stop Button



ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deqing, Zhejiang P.R.C 313219

Telephone: +86(572)8681688

E-Mail: export@cndingli.com

[Https://en.cndingli.com](https://en.cndingli.com)

Due to continuous technology updates, technical parameters are subject to change without notice. This picture book is for reference only, the actual product shall prevail. The copyright is owned by zhejiang dingli, any content may not be copied for any purpose without written permission.

2025-03

