


Model	=Electric	BT30SERT	BT30ERT	BT28SERT	BT28ERT	BT26SERT	BT26ERT	BT24ERT	BA28ERT	BA24ERT
	=Engine	BT30SRT	BT30RT	BT28SRT	BT28RT	BT26SRT	BT26RT	BT24RT	BA28RT	BA24RT
Type	Telescopic Boom Lifts								Articulating Boom Lifts	
Size										
Max. Working Height	30.30m	30.20m	28.10m	28.60m	26.70m	26.30m	24.80m	28.10m	24.30m	
Max. Platform Height	28.30m	28.20m	26.10m	26.60m	24.70m	24.30m	22.80m	26.10m	22.30m	
Max. Horizontal Reach(+0.6m)	23.00m	23.00m	21.40m	21.90m	19.80m	19.50m	17.90m	19.40m	17.10m	
Overall Length(Stowed) A	12.25m	12.30m	11.40m	11.66m	10.83m	10.82m	10.25m	11.83m	9.83m	
Overall Length(Transport)	11.96m	12.00m	11.79m	11.82m	11.12m	10.77m	10.81m	12.03m	10.03m	
Overall Width(Stowed) B	2.50m									
Overall Width(Transport)	2.28m									
Overall Height(Stowed) C	2.89m									
Overall Height(Transport)	2.60m									
Platform Size(Length×Width)	2.44m×0.9m									
Turntable Tailswing	1.61m									
Ground Clearance D	0.41m									
Wheelbase E	2.8m									
Turning Radius(Inside/Outside)	1.87m/3.22m									
Tyres	385/45-28									
Up And Over Clearance								9.14m		
Max. Down Probing Depth								6.61m	4.03m	
Performance										
S.W.L(Unrestricted/Restricted)	300kg/454kg		454kg					250kg	300kg	
Max. Occupants	3							2		
Gradeability	30%					45%				
Travel Speed(Stowed)	6km/h									
Travel Speed(Raised)	1.1km/h									
Max. Working Slope	X-5°/Y-5°									
Turret Rotation	360°Continuous									
Platform Rotation	180°									
Jib Movement	130°	135°	130°	135°	130°	135°				
Weight										
Overall Weight	18900kg		17900kg	18400kg	16800kg	16090kg	14300kg	18400kg	17200kg	
Power										
Lithium Battery	520Ah/80V				420Ah/80V	Optional:520Ah/80V		520Ah/80V	420Ah/80V	
Charger	80V/80A									
Diesel Engine	Deutz TD2.9 L4 55.4kW									
Engine Power	135L									
Hydraulic Tank	165L									



*The above battery capacity is the nominal value, and the actual battery capacity of the machine shall prevail

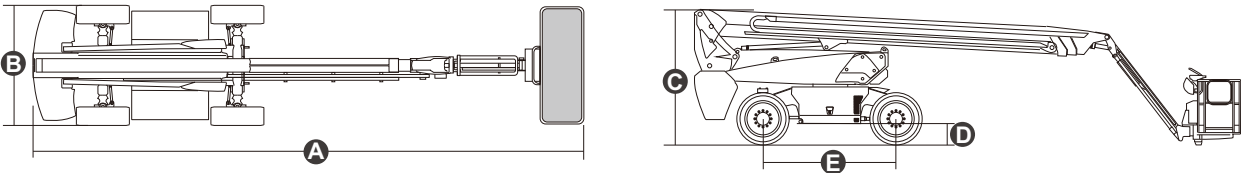