



Our handy icons will
indicate where we have
greener options available



Powered Access Selection Guide

2025 digest edition



0345 745 0000
nationwideplatforms.co.uk

 **Nationwide
Platforms**
A **LOXAM** Company



Your local specialist, throughout the UK

Wherever you are, we're on hand with the fleet and knowledge to deliver the machines you need, to your chosen location, at the right time.

0345 745 0000
nationwideplatforms.co.uk



Contents

Welcome	2-3
my.NationwidePlatforms	4-5
Service and support	6-7
The environment	8-9
Training / National coverage	10-11
Safety innovations	12-13
Harness ON™	14
SkySiren® PCS™ for Scissor	15
Low level	16-21
Scissors	22-35
Booms	36-51
Van mounts	52-55
Truck mounts	56-61
Tracked booms	62-65
Telehandlers	66-67




Welcome to Nationwide Platforms

Your safety, is absolutely our priority.

With depots conveniently located across the country, our local dedicated teams are always on hand to offer you help, guidance and support to meet your working at height needs.

Our large and diverse fleet range will ensure that we have the right solution for your project, no matter the height, ground conditions or access restrictions. And with specialist knowledge in many sectors including construction, aviation, warehousing, industrial services and telecoms we have the know-how to ensure your success.

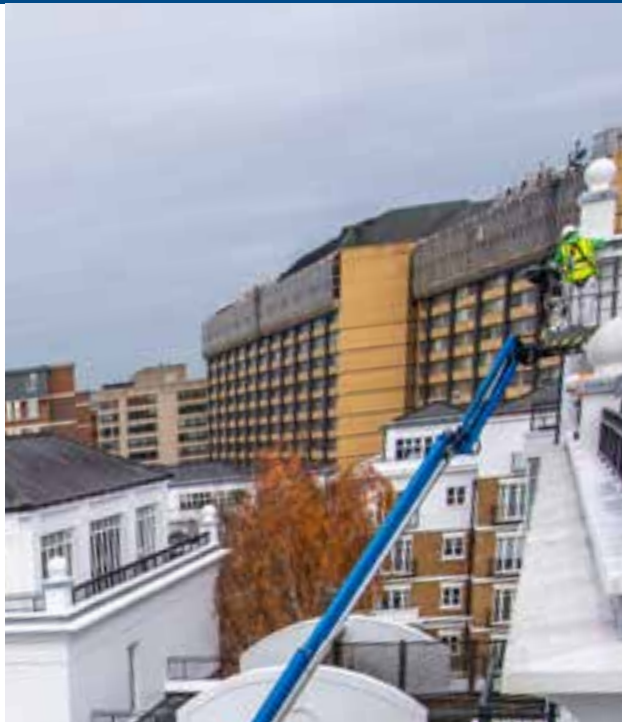

We pride ourselves on our long history of driving forward improvements in safety standards across the industry, whether that is through the adoption of secondary guarding for both boom and now scissor lifts, through to the roll out of Harness ON™, our award-winning BlueSky Solutions team are always on hand to guide and advise.

Our local depot teams and hire desks offer dedicated customer service, available just a call away, but when time is of the essence we also have our digital account management service, my.NationwidePlatforms, available where you can place hires, book training, off-hire a machine and see your invoicing, all in one handy platform available 24/7.

Scan the QR code to speak to your **local depot**, or call

 **0345 745 0000**
nationwideplatforms.co.uk



Introducing my.NationwidePlatforms

Our online account management service that gives you access to manage your account at the touch of a button, 24/7.

Through a suite of online tools, you can easily monitor and maintain your account at a time that suits you.

- **my.Hires** – enables you to place hires, extend the hire period or off-hire for collection, see previous orders and proof of delivery & collection.
- **my.Training** – you can easily book courses, manage & update the delegate details right up to the training day.
- **my.Finance** – you can view, print and query invoices and see your current statement of account.
- **my.Admin** – manage access to the different features and capabilities of the platform where the account needs multiple users.



HireTracker

Our HireTracker service keeps you up to date with each stage of your delivery and collection. You can choose who gets the notification, whether that is the order placer or the site contact taking delivery, you'll be given a three-hour delivery window and by using the link in the email or SMS you can see your live tracking.

What3Words

What3Words helps with the accuracy of deliveries and collections, each 3m² location on the planet has its own unique What3Words reference, making it perfect for hard-to-find sites. Remember to give us your unique reference when you place your next hire.




Register now at
my.NationwidePlatforms.co.uk



0345 745 0000

nationwideplatforms.co.uk

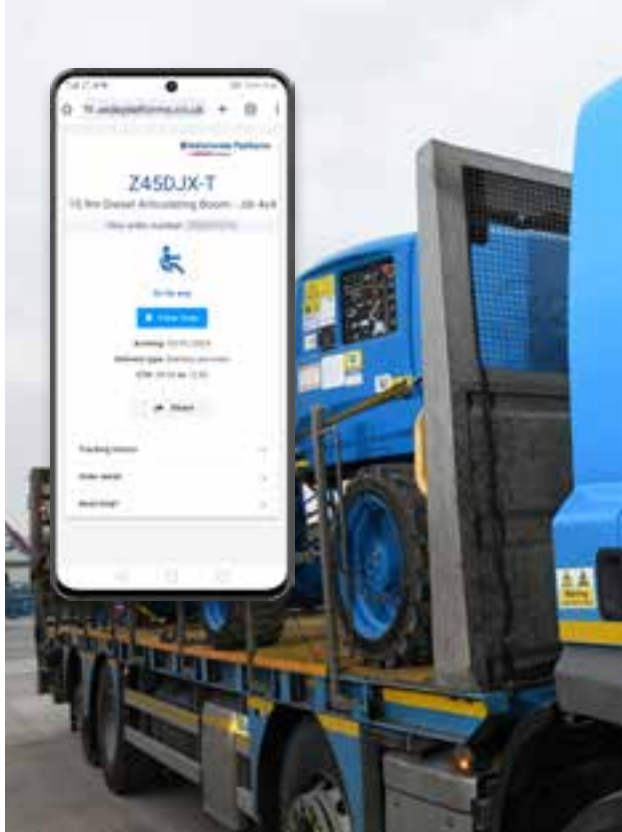

Service and support

Getting you back on track when things go wrong

Through the launch of Visual Remote Assistance (VRA) we are often able to fix some of the common faults or user errors without the need to despatch an engineer - getting you back to work much quicker.

The service is powered through a video call enabling our skilled engineers on the other end of the call to see the machine, diagnose the issue and in many cases resolve the problem. This reduces the need for our engineers to travel to site and frees them up to support other customers who need our help.

To speak to our **Technical Services Team**, call and select option 4



0345 745 0000

nationwideplatforms.co.uk



All the data at the tips of your fingers

With Telematics now fitted to more than 90% of our fleet, the benefits are invaluable. You can:

- Prevent unauthorised use
- Track machine locations on-site
- Set up geo-fencing to manage movement on-site
- Battery management and low battery alerts
- Gain an insight into your operator's behaviours and work practices on-site
- Manage your machines on-site and your sub-contractors
- See the machine utilisation

Speak to us about how
Telematics can support you.

 **0345 745 0000**
nationwideplatforms.co.uk



The environment

Helping you to make greener choices

Over the last few years we have focused on the many ways we have been able to make a difference and support our customers' commitments to building a more sustainable future.

Green alternatives

More than half of our fleet are either electric, hybrid or manual push-around machines. You can reach up to 28m with one of our hybrid MEWPs and 22m by electric.

We've made it really easy for you to pick out the greener alternatives in this guide, look out for one of these icons:



Lowering emissions

For some of our machines the electric and hybrid technology just isn't advanced enough yet, where this is the case, we invest in lowering emissions with EU Standard Stage V compliant engines.

Electric / Hybrid

Hybrid products have a jade **HYBRID** badge.

Electric products can be identified by a green **ELECTRIC** product badge.

BOOMS		Genie Z45DJXC	Genie Z45FES	Genie Z45BJ	Genie Z45EJ	Haulotte HA16PX	Haulotte HA16RTJ
Working height (m)		 15.86	 15.92	 15.94	 15.94	 16.0	 16.0



Renewable Diesel

Where only a diesel machine will do the job, we now offer Hydrotreated Vegetable Oil (HVO), also known as Renewable Diesel, as an alternative to white diesel. All our diesel MEWPs can be operated using HVO.

Green deliveries

Our delivery fleet are all Euro VI compliant and recently our first FM Electric Volvo 4x2 tractor units hit the roads, enabling us to make deliveries and collections with low or zero tail pipe emissions.



To find out about our
Greener product range, call today.



0345 745 0000

nationwideplatforms.co.uk

Training

Safety starts with the right training

As Europe's market leading Powered Access Training company, we offer a range of courses backed by some of the leading trade bodies including IPAF, PASMA, IOSH and the Ladder Association.

With training locations across the UK, our expert training instructors train more than 22,000 delegates each year, and we can even arrange training on your site if that is more convenient.



To find out about our **Training**, or to book a course, call and select option 3



0345 745 0000

nationwideplatforms.co.uk



IPAF Operator Courses

1a Static Vertical Personnel Platform



1b Static Boom



3a Mobile Vertical



3b Mobile Boom



Push Around Vertical (PAV)



Advanced Operator Training



National coverage

**Your local specialists,
throughout the UK**

Wherever you are, we're on hand with the fleet and knowledge to deliver the machines you need, to your chosen location, at the right time.



To find your nearest **Depot**,
scan the QR code or call us today.



0345 745 0000

nationwideplatforms.co.uk



Safety innovations

Introducing BlueSky Solutions

Our research and development team at Nationwide Platforms believe in driving change in the industry through innovations and bespoke solutions to improve safety and tackle key causes of harm or fatality.

Our innovations are centred around preventing accidents and increasing efficiency:

- Avoidance of entrapment through secondary guarding and intelligent secondary guarding.
- Telemetry data and technology preventing unauthorised use of a platform and providing dashboard data and alerts to make managing a site more efficient and effective.
- Material Handling Attachments to reduce the risk of dropped objects and manual lifting.



SkySiren®



SkySiren®
PCS™






SkyRak[®]



SkyRakPlus[®]



SkyRakBoom[®]

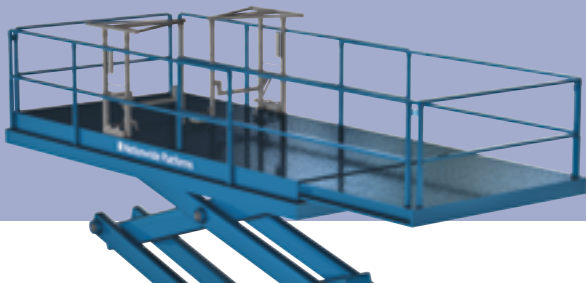

SkySentry[™]



Harness ON[™]

Harness ON[™]
fitted on
all BOOMS



To find out about our
Safety innovations, call today.



0345 745 0000

nationwideplatforms.co.uk



Harness ON™

Harness ON™ is an intelligent anchor point that stops the MEWP's operation until the operator attaches their harness carabiner.

Harness ON is permanently shackled to the MEWP's anchor point and wired electronically into the MEWP's function controls.

Once the carabiner is clipped onto Harness ON, an electronic signal tells the MEWP that operation is now safe and allows function until the carabiner is finally unclipped.



To find out more,
scan the QR code



A simple, unobtrusive
& compliant device



...representing a
step change in safe
working at height

SkySiren® PCS™ for Scissor

Introducing SkySiren® PCS™ for Scissor.

Building on the success of the award winning SkySiren pre-crush sensing (PCS) technology for booms launched in 2017, our BlueSky Solutions team have recently developed a pre-crush sensing secondary guarding solution for scissor lifts, SkySiren PCS for Scissors.



Scan the QR code to see how
SkySiren PCS for Scissor works,
or to find out more, email
pcs.scissor@nationwideplatforms.co.uk





Low level

Our low level platforms offer access up to 8m and safe working loads up to 250kg. Suitable for indoor and outdoor use, our low level access platforms deliver compact access and are a safe alternative to ladders and towers for a variety of uses.

For more information, advice, training and to hire from our wide range of **low level platforms**, either scan the **QR code**, or call our hire desk experts on **0345 745 0000**.



To meet your changing needs we're constantly investing in our fleet. Visit our website for all our latest products and services.



LOW LEVEL




Power Towers PECOLIFT

JLG ECO-WR

Power Towers NANO

Power Towers NANOSP

Power Towers NANOSP+



Working height (m)

3.5

4.2

4.5

4.5

4.5

Closed length (m)

0.98

1.28

1.195

1.2

1.2

Closed height (m)

1.55

1.94

1.56

1.59

1.59

Closed width (m)

0.75

0.95

0.75

0.75

0.75

Platform size (m)

0.72 x 0.60

0.85 x 0.64

1.0 x 0.73

1.0 x 0.73

1.0 x 0.73

Platform length (deck extended) (m)

N/A

N/A

N/A

1.5

2.0

Max SWL (kg)

150

150

200

200

200

Weight (kg)

180

335

285

506

550

Alternative machines

NANO

NANOSP

NANO
NANOSP+

NANO
NANOSP




0345 745 0000






Bravi
**LEONARDO
-WD**




4.9

Popup
POPUP




4.95

Power Towers
**POWER
TOWER**




5.1

Genie
GR12



5.58

Skyjack
SJ12



5.65

Working height (m)

Closed length (m)

1.2

1.31

1.6

1.35

1.37

Closed height (m)

1.72

1.75

1.92

1.79

1.79

Closed width (m)

0.76

0.76

0.78

0.76

0.77

Platform size (m)

1.04 x 0.63

1.04 x 0.52

1.52 x 0.65

0.89 x 0.75

0.93 x 0.69

Platform length
(deck extended) (m)

1.7

N/A

N/A

1.35

N/A

Max SWL (kg)

180

240

250

227

227

Weight (kg)

560

394

342

862

863

Alternative machines

Power Tower

NANO, NANO SP,
POPUP

SJ12

GR12



0345 745 0000





LOW LEVEL

Skyjack
SJ12E

Genie
GR15

Dingli
AMWP7
-8100L

Skyjack
SJ16E



Working height (m)

5.66

6.62

6.7

6.72

Closed length (m)

1.37

1.45

1.45

1.37

Closed height (m)

1.88

1.79

1.99

1.88

Closed width (m)

0.77

0.76

0.76

0.77

Platform size (m)

0.91 x 0.69

0.94 x 0.75

1.0 x 0.76

0.91 x 0.69

Platform length (deck extended) (m)

N/A

1.4

1.5

N/A

Max SWL (kg)

227

227

200

227

Weight (kg)

913

994

990

931

Alternative machines

GR12

SJ16
AMWP7-8100L



SJ16
GR15

GR15
AMWP7-8100L



0345 745 0000





Working height (m)

6.75

7.85

8.0

Closed length (m)

1.37

1.35

1.39

Closed height (m)

1.79

1.98

1.99

Closed width (m)

0.77

0.8

0.8

Platform size (m)

0.85 x 0.69

0.89 x 0.75

0.71 x 0.75

Platform length (deck extended) (m)

N/A

1.4

1.26

Max SWL (kg)

227

159

159

Weight (kg)

971

1264

1285

Alternative machines

GR15
AMWP7-8100L

GR15
3219, GS20

GR20



0345 745 0000







Scissor lifts

Providing access up to 33.5m, our wide range of scissor lifts offer versatile access both indoors and outdoors, with electric, hybrid, and diesel options available.

For more information, advice, training and to hire from our wide range of **scissor lifts**, either scan the **QR code**, or call our hire desk experts on **0345 745 0000**.



To meet your changing needs we're constantly investing in our fleet. Visit our website for all our latest products and services.



SCISSORS

Skyjack
SJ3219







Dingli
0807AC

Skyjack
3219

Genie
GS1932

Dingli
0807PA

Genie
GS20



Working height (m)

7.65

7.8

7.8

7.8

7.8

7.92

Closed length (m)

1.55

1.86

1.78

1.82

1.86

2.45

Closed height (m)

2.13

2.15

2.11

2.11

2.15

2.1

Closed height (rails lowered) (m)

1.78

1.83

1.64

1.76

1.83

1.75

Closed width (m)

0.81

0.76

0.81

0.81

0.76

0.81

Platform size (m)

1.55 x 0.66

1.67 x 0.74

1.63 x 0.71

1.64 x 0.74

1.67 x 0.74

2.21 x 0.70

Platform length (deck extended) (m)

2.46

2.57

2.53

2.54

2.57

3.2

Max SWL (kg)

227

230

227

227

230

363

Weight (kg)

1476

1630

1312

1503

1650

1559

Alternative machines

3219, GS1932

SJ3219,
GS1932, 3219

GS1932, GS20,
0807AC

3219, 3220,
GS20







3220,
COM8



0345 745 0000

25





Working height (m)

8.0

8.0

8.1

8.1

8.2

9.75

Closed length (m)

2.48

2.48

2.32

2.32

2.49

2.45

Closed height (m)

2.23

2.28

2.08

2.1

2.0

2.17

Closed height
(rails lowered) (m)

1.87

1.92

1.73

1.75

1.13

1.99

Closed width (m)

0.83

0.83

0.81

0.84

0.81

1.17

Platform size (m)

2.27 x 0.81

2.27 x 0.81

2.13 x 0.71

2.11 x 0.71

2.31 x 0.81

2.21 x 0.94

Platform length
(deck extended) (m)

3.17

3.17

3.04

3.23

3.23

3.2

Max SWL (kg)

380

380

408

408

350

454

Weight (kg)

2160

2340

1594

1967

1655

2478

Alternative machines

3220, COM8
GS20

GS20
2030ES

COM8, GS20
3220

GS2632
3226



0345 745 0000



SCISSORS

Skyjack
SJ4726







Skyjack
4626

Genie
GS2669RT

Skyjack
6826D

Skyjack
3226

Genie
GS2632



Working height (m)

9.82

9.9

9.9

9.92

9.92

9.92

Closed length (m)

2.32

2.31

3.12

3.12

2.32

2.44

Closed height (m)

2.1

2.15

2.59

2.37

2.15

2.26

Closed height (rails lowered) (m)

1.72

1.79

1.92

1.61

1.91

1.91

Closed width (m)

1.19

1.17

1.75

1.72

0.81

0.81

Platform size (m)

2.11 x 1.07

2.11 x 1.07

2.79 x 1.6

2.44 x 1.42

2.13 x 0.71

2.26 x 0.79

Platform length (deck extended) (m)

3.33

3.01

4.5

3.94

3.23

3.18

Max SWL (kg)

454

454

680

567

227

227

Weight (kg)

2135

2130

3768

3305

1890

1956

Alternative machines

COM10
4626

GS26

6826D,
GS26D-O

GS26D,
SR0818D

GS2632






2630,
3226



0345 745 0000

27





Working height (m)

9.92

10.0

10.0

10.15

10.3

Closed length (m)

2.32

2.48

2.49

2.31

3.17

Closed height (m)

2.29

2.36

2.18

2.14

2.44

Closed height (rails lowered) (m)

1.93

2.0

1.32

1.28

1.59

Closed width (m)

0.84

0.83

0.81

1.2

1.78

Platform size (m)

2.11 x 0.71

2.27 x 0.81

2.31 x 0.81

2.31 x 1.2

2.45 x 1.45

Platform length (deck extended) (m)

3.23

3.17

3.23

3.23

3.7

Max SWL (kg)

227

230

230

450

565

Weight (kg)

2014

2410

2190

2330

3520

Alternative machines

GS2632, 3226,
COM10N

GS2632, 3226
COM10N

GS26D,
6826D



0345 745 0000



SCISSORS

Skyjack
SJ4732







Skyjack
4632

Genie
GS32

Skyjack
6832D

Skyjack
6832RTE

Genie
GS3369RT



Working height (m)

11.65

11.75

11.75

11.75

11.75

11.96

Closed length (m)

2.32

2.31

2.43

3.35

3.35

3.12

Closed height (m)

2.39

2.24

2.3

2.51

2.51

2.59

Closed height (rails lowered) (m)

1.99

1.96

1.8

1.75

1.75

1.92

Closed width (m)

1.19

1.17

1.17

1.76

1.76

1.75

Platform size (m)

2.11 x 1.07

2.11 x 1.07

2.26 x 1.16

2.44 x 1.42

2.44 x 1.42

2.79 x 1.6

Platform length (deck extended) (m)

3.33

3.01

3.25

4.11

4.11

4.5

Max SWL (kg)

318

317

318

454

454

454

Weight (kg)

2571

2300

2796

3685

3845

3949

Alternative machines

4632,
GS32

GS32

3246

GS32D,
SR1018D







6832D



0345 745 0000

29





Working height (m)

12.0

12.06

12.06

12.06

13.7

13.8

Closed length (m)

2.49

3.17

4.88

4.88

2.44

2.74

Closed height (m)

2.39

2.56

2.71

2.71

2.54

2.5

Closed height
(rails lowered) (m)

1.53

1.7

2.03

2.03

1.88

2.08

Closed width (m)

1.2

1.78

2.29

2.29

1.19

1.2

Platform size (m)

2.31 x 1.2

3.7 x 1.78

4.81 x 1.83

4.81 x 1.83

2.26 x 1.15

2.3 x 1.2

Platform length
(deck extended) (m)

3.23

N/A

7.38

7.38

3.36

3.22

Max SWL (kg)

300

450

1134

1134

350

350

Weight (kg)

2470

4110

6890

6826

3221

3175

Alternative machines

GS32,
4632

GS3369RT,
GS32D-O

6832D,
SR1023D,
GS3369RT

GS43G,
GS53G

COM14,
1412AC

LL15N, 4069,
S152-12



0345 745 0000



SCISSORS

Dingli
1412AC







Skyjack
SJ4740

Skyjack
8841

Haulotte
H15SX

LGMG
SR1323D

Genie
GS43



Working height (m)

13.8

13.86

14.5

15.0

15.0

15.1

Closed length (m)

2.48

2.4

3.49

4.18

4.9

4.88

Closed height (m)

2.62

2.53

2.9

2.77

2.96

2.93

Closed height (rails lowered) (m)

2.09

2.03

2.22

1.91

2.28

2.25

Closed width (m)

1.19

1.19

2.21

2.25

2.3

2.29

Platform size (m)

2.27 x 1.12

2.19 x 1.06

3.51 x 1.76

3.91 x 1.89

3.98 x 1.83

4.81 x 1.83

Platform length (deck extended) (m)

3.17

3.1

4.71

6.0

7.4

7.38

Max SWL (kg)

320

350

680

500

910

680

Weight (kg)

2990

2970

5289

6340

7360

7323

Alternative machines

COM14, 4740,
GS-4047

GS-4047,
1412AC

GS43

GS43

GS43,
8841







SR1323D,
8841



0345 745 0000

31





Working height (m)

15.1

15.2

15.7

15.7

17.2

17.5

Closed length (m)

4.88

3.35

2.84

2.84

4.47

3.34

Closed height (m)

2.93

3.0

2.62

2.62

3.16

3.15

Closed height (rails lowered) (m)

2.25

2.25

2.09

2.09

2.29

2.38

Closed width (m)

2.29

1.19

1.25

1.25

2.34

1.19

Platform size (m)

4.81 x 1.83

3.04 x 1.18

2.64 x 1.12

2.64 x 1.12

4.27 x 1.88

3.04 x 1.18

Platform length (deck extended) (m)

7.38

4.24

3.74

3.54

7.2

4.25

Max SWL (kg)

680

500

250

250

681

500

Weight (kg)

7323

4700

3360

3580

7395

5350

Alternative machines

GS53G

LL15N,
GS-4047

9250X-O

LL15N



0345 745 0000



SCISSORS

LGMG
SR1623D

Haulotte
H18SX


Skyjack
SJ9253RT

Genie
GS53

Genie
GS53G


Working height (m)

Closed length (m)
Closed height (m)
Closed height (rails lowered) (m)
Closed width (m)
Platform size (m)
Platform length (deck extended) (m)
Max SWL (kg)
Weight (kg)




17.9

4.9
3.18
2.5
2.3
3.98 x 1.83
7.4
680
8200




18.0

4.18
2.99
2.11
2.25
4.0 x 1.89
6.0
500
7360




18.15

4.42
3.19
2.4
2.3
4.31 x 1.9
7.12
681
8215



18.15

4.88
3.15
2.47
2.29
4.81 x 1.83
7.38
680
8050



18.2

4.88
3.15
2.47
2.29
4.81 x 1.83
7.38
680
9541

Alternative machines

GS53,
H18SX



GS53



GS53, 9250X,
H18SX



LL20X



GS43G



0345 745 0000





Holland Lift
165-12







Holland Lift
HL190E

Dingli
1912DC

Holland Lift
195-12

Holland Lift
HL220H

Holland Lift
HL220D



Working height (m)

18.5

18.8

19.0

21.4

21.7

21.9

Closed length (m)

3.74

3.74

4.72

3.74

4.84

4.84

Closed height (m)

3.4

3.4

3.57

3.74

3.65

3.65

Closed height (rails lowered) (m)

2.65

2.24

2.74

3.01

2.88

2.88

Closed width (m)

1.2

1.2

1.25

1.2

2.44

2.44

Platform size (m)

3.38 x 1.16

3.38 x 1.16

4.3 x 1.19

3.38 x 1.16

4.5 x 2.3

4.5 x 2.3

Platform length (deck extended) (m)

4.88

4.88

6.1

4.88

7.0

7.0

Max SWL (kg)

500

500

750

500

750

750

Weight (kg)

7985

7985

11750

9120

13900

12140

Alternative machines

180-12, LL15N,
LL17E, S175-12

195-12,
1912DC

HL190E

SL180N

HL220D,
LL20X, S225

LL20X, HL235D



0345 745 0000



SCISSORS


Dingli
2212DC

Dingli
2223RTB


HAB
S225-24

Holland Lift
HL235D


Holland Lift
M250




22.0




22.0



22.5



23.2



27.0

Working height (m)

Closed length (m)

4.72

4.95

4.84

5.75

6.57

Closed height (m)

3.82

3.86

3.72

4.01

3.89

Closed height (rails lowered) (m)

2.99

3.0

2.88

3.1

3.13

Closed width (m)

1.25

2.46

2.39

2.49

2.65

Platform size (m)

4.3 x 1.19

4.59 x 2.25

4.5 x 2.36

5.22 x 2.40

6.15 x 2.50

Platform length (deck extended) (m)

6.1

7.29

7.2

7.32

8.25

Max SWL (kg)

600

750

750

1000

1000

Weight (kg)

12350

13000

11000

18100

21910

Alternative machines

195-12

S225-24,
HL220D

LL20X

LL20X,
HL220D







SL245



0345 745 0000

35





Working height (m)

27.2

27.2

28.0

28.0

32.0

33.5

Closed length (m)

6.57

6.57

5.96

5.96

6.73

7.02

Closed height (m)

3.89

3.89

4.13

4.1

4.13

3.63

Closed height
(rails lowered) (m)

3.13

3.13

3.19

3.4

3.19

2.87

Closed width (m)

2.5

2.5

2.5

2.5

2.55

2.98

Platform size (m)

6.15 x 2.35

6.15 x 2.35

5.48 x 2.45

5.48 x 2.44

6.2 x 2.45

6.66 x 2.80

Platform length
(deck extended) (m)

8.25

8.25

7.58

7.57

8.3

9.66

Max SWL (kg)

1000

1000

1000

750

1000

1000

Weight (kg)

25100

22670

19800

18000

24620

31350

Alternative machines

S280

M250, S280

S280-25

2825RT

HL340D

3223RT



0345 745 0000





Booms

We have a wide range of electric, hybrid, gas and diesel boom lifts for hire. For indoor and outdoor jobs requiring up-and-over access, our booms offer working height access up to 58.5m and useful outreach of up to 27.4m.

For more information, advice, training and to hire from our wide range of **boom lifts**, either scan the **QR code**, or call our hire desk experts on **0345 745 0000**.



To meet your changing needs we're constantly investing in our fleet. Visit our website for all our latest products and services.



Haulotte
STAR10A



10.0

3.0


JLG
Toucan 10E



10.1

3.38


Dingli
BA11NE



10.8

6.35


Genie
Z30N



10.89

6.25


Skyjack
SJ30 ARJE



11.0

6.26


Dingli
AMWP 11.5-8100



11.2

3.0

Dingli
AMWP 11.5-82AC



11.2

3.0

Working height (m)

Horizontal outreach (m)

Reach below ground

Closed length (m)

Closed height (rails up) (m)

Closed width (m)

Platform size (m)

Rotation (°)

Max SWL (kg) #

Weight (kg)

N/A

2.7

1.99

1.0

0.78 x 0.98

345

200

2677

N/A

2.82

1.99

0.99

0.70 x 0.90

360

200

2980

N/A

5.52

2.0

1.2

0.76 x 1.17

355

227

6660

N/A

5.31

2.0

1.19

1.17 x 0.76

355

227

6450

N/A

5.51

1.98

1.19

1.17 x 0.76

355

227

5750

N/A

2.53

1.99

1.00

0.87 x 0.62

345

200

2950

N/A

2.62

1.99

1.00

0.93 x 0.69

345

200

2970

Alternative machines

STAR10,
AMWP11.5-8100



STAR10,
STAR10A,
Toucan12E+



Z30N,
SJ30ARJE



30J



Z30N,
HA12CJ



STAR10,
STAR10A,
AMWP11.5-82AC



Star10A,
AMWP11.5-8100



0345 745 0000

Harness ON™
fitted on
all BOOMS



**Working
height (m)**

**Horizontal
outreach (m)**

Reach below ground

Closed length (m)

Closed height

(rails up) (m)

Closed width (m)

Platform size (m)

Rotation (°)

Max SWL (kg) #

Weight (kg)

Alternative machines

0345 745 0000

Harness ON™
fitted on
all BOOMS

40

Dingli
**AMWP
11.5-81**



11.2

3.0

N/A

2.72

1.99

1.00

0.87 x 0.62

345

200

2950

STAR10, STAR10A,
Toucan10E,
Toucan12E+



Haulotte
HA12CJ



11.68

6.94

N/A

5.36

1.99

1.2

1.14 x 0.8

355


250

7065

G30N,
Z30N



Dingli
BA12NE



11.8

6.5

N/A

3.89

2.29

1.2

0.76 x 1.17

355

227

7080

BA11NE, Z30N,
HA12CJ



Genie
Z33E



12.0

5.57

N/A

4.17

1.98

1.5

1.16 x 0.76

400


200

3665

HR12NB



Nifty Lift
HR12NBS



12.2

6.1

N/A

4.1

1.9

1.5

1.10 x 0.65

360


200

3435

HR12N



Genie
G34N



12.52

6.78

N/A

5.72

2.0

1.47

1.42 x 0.76

355







227

5171

HR12NB,
Z33



Depending on load, angle of rotation and outrigger configuration.



**Working
height (m)**

14.87

15.4

15.5

15.56

15.69

15.72

**Horizontal
outreach (m)**

8.65

9.6

9.7

11.0

7.6

7.62

Reach below ground

N/A

N/A

N/A

1.27

N/A

N/A

Closed length (m)

6.65

6.3

6.4

9.47

6.78

6.57

Closed height

(rails up) (m)

2.1

2.1

1.99

2.51

2.08

2.27

Closed width (m)

1.52

1.5

1.5

2.49

2.23

2.35

Platform size (m)

1.15 x 0.8

1.5 x 0.70

1.5 x 0.8

2.44 x 0.91

1.82 x 0.76

1.83 x 0.76

Rotation (°)

355

360

360

Continuous

359

355

Max SWL (kg) #

230

225

225

454-300†

227

454-299†

Weight (kg)

7230

6680

7250

7394

6542 / 6892*

7507

Alternative machines

HR15NH,
HR15NBS

Z45BJ

HR15NB

460SJHCS,
SJ45T+

Z45D,
Z45D-R

Z45DJXC



0345 745 0000







Harness ON™
fitted on
all BOOMS



Depending on load, angle of rotation and outrigger configuration.

* Air filled / Foam filled





**Working
height (m)**

**Horizontal
outreach (m)**

15.72

15.72

15.72

15.72

15.75

15.8

6.93

7.47

7.24

7.24

12.1

7.81

Reach below ground

Closed length (m)

Closed height

(rails up) (m)

Closed width (m)

Platform size (m)

Rotation (°)

Max SWL (kg) #

Weight (kg)

1.4

N/A

N/A

N/A

2.0

N/A

6.0

2.24

6.45

6.5

8.83

6.66

2.06

2.24

2.01

2.01

2.4

1.98

2.29

2.34

1.75

1.75

2.29

1.8

1.83 x 0.76

1.83 x 0.76

0.76 x 1.52

1.52 x 0.76

2.44 x 0.91

1.83 x 0.76

355

180

360

360

Continuous

355

300

230

230

230

454

230

5075

7242

6722

6532

7160

7500

Alternative machines

Z45DJXC,
45AJHCS

HA16SPX

Z45EJ

45MJP

S45XCS,
460SJHCS

Z45EJ,
Z45E, 45EJ


0345 745 0000

Harness ON™
fitted on
all BOOMS

42




Depending on load, angle of rotation and outrigger configuration.




15.86

7.55




15.92

6.94




15.94

7.65




15.94

7.65



16.0

9.15



16.0

8.3

**Working
height (m)**

**Horizontal
outreach (m)**

Closed length (m)

Closed height
(rails up) (m)

Closed width (m)

Platform size (m)

Rotation (°)

Max SWL (kg) #

Weight (kg)

6.66

2.25

2.29

1.83 x 0.76

355

454-300†

6984

5.87

2.29

1.83

1.83 x 0.76

355

300

6559

6.83

2.0

1.79

1.83 x 0.76

355

227

7620

6.83

2.0

1.79

1.83 x 0.76

355

227

7394

6.95

2.3

2.3

1.8 x 0.80

360

230

6950

6.75

2.3

2.3

1.83 x 0.8

355

230

6200

Alternative machines

45AJHCS

HR15RTH

Z45EJ

45EJ

Z4525DJX,
45JSX, SJ46AJ

Z4525DJX,
45JSX, SJ46AJ


0345 745 0000

Harness ON™
fitted on
all BOOMS




Depending on load, angle of rotation and outrigger configuration.






16.05

7.52




16.05

12.2




16.09

7.67



16.1

7.54



17.2

9.4



20.0

14.6

Working height (m)

Horizontal outreach (m)

Reach below ground

Closed length (m)

Closed height

(rails up) (m)

Closed width (m)

Platform size (m)

Rotation (°)

Max SWL (kg) #

Weight (kg)

N/A

6.65

2.13

2.29

1.83 x 0.76

355

227

6574

7.0

8.91

2.47

2.31

2.44 x 0.91

360

454-299†

9306

N/A

6.77

2.17

2.31

1.83 x 0.76

355

230

7160

1.5

6.5

2.07

2.29

1.83 x 0.76

360

227

6500

N/A

6.35

2.1

2.0

1.8 x 0.85

360

225

5000

N/A

7.0

3.4

2.6

6.7 x 2.28

180

1350

18000

Alternative machines

45AJ, SJ46AJ,
HA16RTJ



2 RT⁴ A

2 RT⁴ S

2 RT⁴ S

2 RT⁴ S

2 RT⁴ S

S45XCS,
SJ45T+

2 RT⁴ S

2 RT⁴ S

2 RT⁴ S

2 RT⁴ S

2 RT⁴ S

45AJ, Z4525DJX,
SJ46AJ, HA16RTJ

2 RT⁴ A

2 RT⁴ S

2 RT⁴ S

2 RT⁴ S

2 RT⁴ S

Z4525DJX,
Z45DJX, 45JSX

2 RT⁴ A

2 RT⁴ S

2 RT⁴ S

2 RT⁴ S

2 RT⁴ S

HR21H

2 RT⁴ A

2 RT⁴ S

2 RT⁴ S

2 RT⁴ S

2 RT⁴ S

TITAN40

2 RT⁴ S

2 RT⁴ S

2 RT⁴ S

2 RT⁴ S


2 RT⁴ S

0345 745 0000

Harness ON™
fitted on
all BOOMS


44

Depending on load, angle of rotation and outrigger configuration.




20.11

11.56




20.16

11.15




20.29

12.12




20.3

12.3



20.39

11.05



20.6

12.2

**Working
height (m)**

**Horizontal
outreach (m)**

Reach below ground

Closed length (m)

Closed height
(rails up) (m)

Closed width (m)

Platform size (m)

Rotation (°)

Max SWL (kg) #

Weight (kg)

Op width full (m)

1.5

8.59

2.54

2.44

2.44 x 0.91

Continuous

454

8557

N/A

2.46

8.15

2.54

2.49

1.83 x 0.76

355

227

7756

2.49

N/A

8.82

2.56

2.44

1.83 x 0.91

180

227

10650

N/A

2.5

9.15

2.58

2.49

2.44 x 0.91

360

454-299†

11986

N/A

N/A

8.15

2.69

2.46

1.83 x 0.76

Continuous

227

10025 / 10765*

N/A

N/A

8.8

2.51

2.42

1.83 x 0.8

Continuous

230

9600

N/A

Alternative machines

60AJHCS, Z62,
HA20RTJPRO

HR21H

60AJ,
60AJX-P

SJ60AJ+

G60-R, HR21D,
60AJX, Z62

G60X, HA260PX,
HR21D

0345 745 0000

45







Harness ON™
fitted on
all BOOMS



* Depending on load, angle of rotation and outrigger configuration.

* Air filled / Foam filled





**Working
height (m)**

**Horizontal
outreach (m)**

20.6

20.65

20.8

21.8

21.81

20.87

12.3

13.5

12.5

17.1

16.51

12.47

Reach below ground

Closed length (m)

Closed height

(rails up) (m)

Closed width (m)

Platform size (m)

Rotation (°)

Max SWL (kg) #

Weight (kg)

Op width full (m)

N/A

7.16

2.92

2.49

2.44 x 0.91

353

300

8051

N/A

N/A

8.93

2.67

2.38

1.8 x 0.80

360

230

11710

N/A

N/A

5.3

2.15

2.27

1.80 x 0.85

360

225

6680

N/A

2.71

9.5

2.72

2.5

1.83 x 0.76

Continuous

227

10102

N/A

2.65

9.76

2.81

2.49

1.83 x 0.76

Continuous

454-300†

11412

N/A

N/A

9.25

2.56

2.49

1.83 x 0.76

Continuous

227

10766

2.49

Alternative machines

BT22HRT

M60J, HR21B

G65X, 66JX

HT23RTJ,
SJ66T+, LGT22J,
660SJHCS

0345 745 0000

Harness ON™
fitted on
all BOOMS

46



Depending on load, angle of rotation and outrigger configuration.

JLG
660
SJHCS







JLG
66JX

Skyjack
SJ66T+

Dingli
BA22ERT

Haulotte
HT23RTJ

Dingli
BT22HRT



Working height (m)

Horizontal outreach (m)

22.1

17.41

22.12

17.3

22.19

17.38

22.21

12.72

22.5

18.3

22.51

17.28

Reach below ground

Closed length (m)

Closed height (rails up) (m)

Closed width (m)

Platform size (m)

Rotation (°)

Max SWL (kg) #

Weight (kg)

Op width full (m)

1.8

10.01

2.58

2.49

2.44 x 0.91

Continuous

454-299†

13282

N/A

N/A

10.21

2.56

2.43

1.83 x 0.91

180

227

13500

N/A

3.0

10.4

2.59

2.44

1.83 x 0.91

360

454

12485

N/A

1.77

9.55

2.49

2.29

1.83 x 0.79

360

230

10100

N/A

4.0

10.4

2.7

2.47

2.44 x 0.91

Continuous

230

13400

N/A

N/A

10.16

2.65

2.5

2.44 x 0.91

Continuous

454

13200

N/A

Alternative machines

S65XC, HT23RTJ,
SJ66T+, LGT22J

G65,
G65X

S65XC, HT23RTJ,
LGT22J, 660SJHCS

S65X, SJ66T+,
LGT22J, 660SJHCS

S60FE

0345 745 0000

Harness ON™
fitted on
all BOOMS



Depending on load, angle of rotation and outrigger configuration.





**Working
height (m)**

**Horizontal
outreach (m)**

Reach below ground

Closed length (m)

Closed height
(rails up) (m)

Closed width (m)


Platform size (m)

Rotation (°)

Max SWL (kg) #

Weight (kg)

Op width full (m)



23.8

17.5

2.3

10.6

2.79

2.49


2.44 x 0.9

Continuous

450

12300

N/A



25.6

16.2

N/A

12.0

2.71

2.4


1.8 x 0.8

360

230

15890

N/A



25.6

18.29

N/A

11.27

3.0

2.49


2.44 x 0.91

Continuous

227

17010

N/A



26.3

15.9

4.0

11.22

2.97

2.48


2.44 x 0.91

360

454-299†

17500

N/A



26.3

15.74

N/A

11.12

3.0

2.44


1.83 x 0.91

360

230

15600

N/A



26.38

15.8

3.0

11.13

3.0

2.49

1.83 x 0.91

Continuous

230

16110

N/A

Alternative machines


0345 745 0000

Harness ON™
fitted on
all BOOMS

48




Depending on load, angle of rotation and outrigger configuration.




27.74

22.71




27.9

17.02




27.9

23.32




28.0

19.0



28.1

19.4



28.1

19.4

Working height (m)

Horizontal outreach (m)

Reach below ground

Closed length (m)

Closed height (rails up) (m)

Closed width (m)

Platform size (m)

Rotation (°)

Max SWL (kg) #

Weight (kg)

Op width full (m)

2.69

12.37

2.8

2.49

1.83 x 0.76

Continuous

454-300†

17917

N/A

2.0

11.63

2.67

2.49

1.83 x 0.91

Continuous

340-227†

16965

N/A

2.89

12.4

2.8

2.5

1.83 x 0.76

Continuous

227

17236

2.5

N/A

9.28

2.7

2.49

2.4 x 0.9

360

280

14700

N/A

6.61

11.83

2.89

2.5

2.44 x 0.91

Continuous

250

18400

N/A

6.61

11.83

2.89

2.5

2.44 x 0.91

Continuous

250

18400

N/A

Alternative machines

860SJHCS
BT28RT

Z80,
80JX

860SJ

H800AJ,
BA28HRT

HR28H,
H800AJ

Z80
80JX




0345 745 0000

Harness ON™
fitted on
all BOOMS




Depending on load, angle of rotation and outrigger configuration.






28.21

22.78



28.21

22.86




28.6

21.3



28.6

21.9



30.3

23.0

**Working
height (m)**

**Horizontal
outreach (m)**

Reach below ground

Closed length (m)

Closed height
(rails up) (m)

Closed width (m)

Platform size (m)

Rotation (°)

Max SWL (kg) #

Weight (kg)

Op width full (m)

1.2

12.19

3.05

2.5

2.44 x 0.91

Continuous

454-227†

17255

N/A

3.0

12.19

3.05

2.49

2.44 x 0.91

360

227

16511

2.5

N/A

11.66

2.87

2.5

2.44 x 0.91

Continuous

454

18400

N/A

N/A

11.66

2.87

2.5

2.44 x 0.91

Continuous

454

18400

N/A

N/A

12.3

2.87

2.5

2.44 x 0.91

Continuous

454

18900

N/A

Alternative machines

0345 745 0000

Harness ON™
fitted on
all BOOMS

50



* Depending on load, angle of rotation and outrigger configuration.



**Working
height (m)**

**Horizontal
outreach (m)**

Reach below ground

Closed length (m)

Closed height
(rails up) (m)

Closed width (m)

Platform size (m)

Rotation (°)

Max SWL (kg) #

Weight (kg)


Op width full (m)

Alternative machines


0345 745 0000

51

Harness ON™
fitted on
all BOOMS 



31.8

21.3

4.0

11.16

2.7

2.5

2.44 x 0.80


Continuous

250

20800

3.33

1250AJP, Z135,
ZX135



38.73

22.86

N/A

10.64

3.05

2.49

2.44 x 0.91


Continuous

450-230†

18500

3.81

S125



40.1

24.38

2.69

12.19

3.05

2.49

2.44 x 0.91


360

454

20700

N/A

1200SJP



40.1

19.25

N/A

11.45

3.05

2.49

2.44 x 0.91


Continuous

450-227†

19958

3.81

ZX135,
Z135



40.15

24.38

N/A

14.25

3.07

2.49

2.44 x 0.91


Continuous

227

20248

3.35

1200SJP,
1350SJP



41.5

19.8

N/A

12.6

N/A

2.5

2.44 x 0.8

360

230

23000

3.3

Z135,
1250AJP



Depending on load, angle of rotation and outrigger configuration.





**Working
height (m)**

**Horizontal
outreach (m)**

Reach below ground

Closed length (m)

Closed height
(rails up) (m)

Closed width (m)

Platform size (m)

Rotation (°)

Max SWL (kg) #

Weight (kg)


Op width full (m)

Alternative machines

0345 745 0000

Harness ON™
fitted on
all BOOMS

52



41.5

20.1

1.5

13.1

3.0

2.53

2.44 x 0.91


Continuous

230

23900

3.3

Z135,
1250AJP



43.15

27.43

6.0

19.76

3.05

2.49

2.44 x 0.91


Continuous

454-230†

21747

3.94

1350SJP



43.15

21.26

5.87

12.93

3.07

2.46

2.44 x 0.91


Continuous

272

20366

3.94

ZX135,
1250AJP



43.15

21.26

5.87

12.93

3.09

2.49

2.44 x 0.91


Continuous

272

20502

5.03

Z135,
1250AJP



43.3

24.38

N/A

11.86

3.05

2.49

2.44 x 0.91


Continuous

450-230†

20400

3.81

Z135, 1200SJP,
S125



47.72

25.03

3.0

18.82

3.05

2.49

2.44 x 0.91

360

454-227†

22000

3.81

SX150



Depending on load, angle of rotation and outrigger configuration.

**Working
height (m)**

**Horizontal
outreach (m)**

Reach below ground

Closed length (m)

Closed height
(rails up) (m)

Closed width (m)


Platform size (m)

Rotation (°)

Max SWL (kg) #

Weight (kg)

Op width full (m)



48.02

24.38

0.91

16.18

3.05

2.49


2.44 x 0.91

Continuous

340

23236

5.03



48.15

23.55

6.1

15.1

3.1

2.5


0.91 x 2.44 (5*)

Continuous

450-270†

26127

5.0



56.86

24.38

N/A

14.33

3.05

2.49


2.44 x 0.91

Continuous

340

25095

5.03



58.56

24.38

1.47

14.57

3.05

2.49

2.44 x 0.91

Continuous

454-227†

27170

5.03

Alternative machines

SX180

1850SJP

SX180

0345 745 0000

53

Harness ON™
fitted on
all BOOMS



Depending on load, angle of rotation and outrigger configuration.





Van mounts

With working heights of between 12m and 17m, our range of van mounted platforms are available to hire on an operated or self-drive basis.

For more information, advice, training and to hire from our range of **van mounts**, either scan the **QR code**, or call our hire desk experts on **0345 745 0000**.



To meet your changing needs we're constantly investing in our fleet. Visit our website for all our latest products and services.



VAN MOUNTS

GSR
VT125K




Versalift
VT12E

VTE12E

VR13E

GSR
VI14GS

GSR
VM14GS



Working height (m)

12.9

13.0

13.5

13.7

13.75

13.75

Horizontal outreach (m)

7.3

7.0

8.0

8.5

7.8

7.8

Closed length (m)

6.54

6.74

6.77

6.88

7.0

7.2

Closed height (rails up) (m)

3.8

3.15

3.4

3.3

3.45

3.45

Closed width (m)

2.2

2.45

2.45

2.45

2.2

2.2

Platform size (m)

1.0 x 0.6

1.0 x 0.6

1.0 x 0.6

1.0 x 0.6

1.0 x 0.6

1.0 x 0.6

SWL (kg) #

200

200

200

230

250

250

Weight (kg)

3500

3500

4250

3500

5000

5000

Op width full (m)

2.45

2.45

2.45

2.45

2.25

2.25

Min op width (m)

2.45

2.45

2.45

2.45

2.25

2.25

Overall spare

payload (vans) (kg)

200

200

500

290

900

900

Alternative machines

VT12E, VR13KL

VT125K, VR13KL

N/A

VR13KL, V112E
VT125K

V14E, VM14GS

V14E, VI14GS



0345 745 0000

55



Depending on load, angle of rotation and outrigger configuration.






Working height (m)

Horizontal outreach (m)

Closed length (m)
Closed height (rails up) (m)
Closed width (m)
Platform size (m)
SWL (kg) #
Weight (kg)
Op width full (m)
Min op width (m)
Overall spare payload (vans) (kg)



13.8

8.4

7.0

3.6

2.45

1.2 x 0.7

230

3500

2.45

2.45

2.45

395



13.8

8.0

6.51

3.3

2.2

1.1 x 0.6

200-120†

3500

2.5

2.5

200



14.2

7.3

7.34

3.8

2.2

1.0 x 0.6


200

5200

2.25

2.25

800



16.5

7.3

8.22

4.0

2.2

1.0 x 0.6


200

6500

2.3

2.3

1000



17.0

10.5

8.47

3.7

2.45

1.0 x 0.6

230

7000

2.45

2.45

2200

Alternative machines

VT12E, VR13KL, VR13E



VT12E, VT125K



VI14GS, VM14GS



0345 745 0000







Truck mounts

Our truck mounted cherry pickers offer flexible access from 13m to 90m, with both self-drive and operated hire options available.

For more information, advice, training and to hire from our wide range of **truck mounts**, either scan the **QR code**, or call our hire desk experts on **0345 745 0000**.



To meet your changing needs we're constantly investing in our fleet. Visit our website for all our latest products and services.



TRUCK MOUNTS

Versalift
T1135EX

GSR
T14GS

GSR
T17GS


CTE
T20CJHV

GSR
T20GS

Working height (m)

Horizontal outreach (m)


Reach below ground
Max horiz outreach* (m)
Closed length (m)
Closed height (m)
Closed width (m)
Platform size (m)
SWL (kg) #
Weight (kg)
Op width full (m)
Min op width (m)
Point load front/rear



13.3

6.1


N/A
N/A
4.7
2.6
2.0
1.0 x 0.6
230
3500
2.4
2.4
20kN / 20kN



14.0

8.0


N/A
N/A
7.2
2.95
2.1
1.4 x 0.7
200
3500
2.4
2.4
28kN / 28kN



17.1

9.5


N/A
6.7
7.1
2.95
2.2
1.4 x 0.7
250
3500
2.4
2.4
28kN / 28kN



20.0

12.0

N/A
N/A
7.59
2.96
2.25
1.4 x 0.7
300-100†
3500
3.68
2.33
20kN / 30kN



20.0

8.2

N/A
N/A
7.46
2.77
2.1
1.4 x 0.7
280
3500
2.3
2.3
25kN / 18kN

Alternative machines



0345 745 0000

59



T14C



T18AS



T20M



T20C



* Depending on load, angle of rotation and outrigger configuration.

* With full safe working load



TRUCK MOUNTS






Multitel
T20M

GSR
T220GSR

GSR
T22GS

GSR
T22GSH

CTE
T23C



Working height (m)

20.0

21.75

22.0

22.0

23.0

Horizontal outreach (m)

11.0

11.4

17.7

17.7

10.0

Reach below ground

2.0

1.0

N/A

N/A

N/A

Max horiz outreach* (m)

8.6

8.45

N/A

N/A

10.0

Closed length (m)

7.65

7.6

8.7

8.7

7.48

Closed height (m)

3.0

2.76

3.55

3.55

2.8

Closed width (m)

2.1

2.25

2.5

2.5

2.25

Platform size (m)

1.40 x 0.70

1.4 x 0.7

1.8 x 0.8

1.8 x 0.8

1.4 x 0.7

SWL (kg) #

250-80†

250

280

280

250

Weight (kg)

3500

3500

7500

8200

3500

Op width full (m)

3.4

2.5

4.5

4.5

3.92

Min op width (m)

2.5

2.5

2.5

2.5

N/A

Point load front/rear

30kN / 19kN

22.5kN / 22kN

60kN / 60kN

60kN / 60kN

28kN / 28kN

Alternative machines

T20C



T22GS



0345 745 0000

60

* With full safe working load

Depending on load, angle of rotation and outrigger configuration.

TRUCK MOUNTS

Ruthmann
T260R


GSR
T26GS

Ruthmann
T28RX

Ruthmann
T33R


Ruthmann
T33RH

Bronto
T35BEM




26.0

17.0




26.0

14.0




28.0

21.3




33.0

21.2



33.0

21.2



35.0

25.0

Working height (m)

Horizontal outreach (m)

Reach below ground

Max horiz outreach* (m)

Closed length (m)

Closed height (m)

Closed width (m)

Platform size (m)

SWL (kg) #

Weight (kg)

Op width full (m)

Min op width (m)

Point load front/rear

N/A

17.0

7.86

3.05

2.3

1.4 x 0.7

250-100†

3500

3.85

2.34

32kN / 25kN

N/A

14.0

7.8

3.6

2.5

1.4 x 0.7

280

7500

3.5

3.5

60kN / 60kN

N/A

16.0

8.12

3.8

2.5

1.7 x 0.86

320-100†

11000

3.8

2.5

110kN / 50kN

N/A

16.5

8.7

3.56

2.5

1.7 x 0.86

320-100†

7490

5.32

2.53

56kN / 42kN

N/A

16.5

8.7

3.56

2.5

1.7 x 0.86

320-100†

8600

5.32

2.53

56kN / 42kN

1.0

28.6

10.2

3.7

2.5

2.4 x 0.9

450-120†

18000

5.9

2.5

120kN / 120kN

Alternative machines



0345 745 0000

61



T26C



T26CX



T33RH









T33R



* Depending on load, angle of rotation and outrigger configuration.



* With full safe working load



Working height (m)

37.0

38.0

44.0

48.0

49.5

56.0

Horizontal outreach (m)

30.0

25.3

24.0

28.0

35.0

37.3

Reach below ground

6.0

6.5

5.0

13.5

11.0

9.0

Max horiz outreach* (m)

21.0

21.0

21.0

22.0

25.0

32.0

Closed length (m)

8.9

10.0

10.0

10.4

12.0

11.9

Closed height (m)

3.9

3.7

3.8

4.0

4.0

3.7

Closed width (m)

2.55

2.5

2.5

2.55

2.5

2.5

Platform size (m)

2.3 (3.6) x 0.90

2.3 (3.7) x 1.05

2.4 (3.7) x 1.0

2.15 (3.8) x 1.05

2.20 (3.7) x 0.90

2.4 (3.7) x 1.0

SWL (kg) #

500-100†

600-120†

600-120†

600-100†

600-120†

600-200†

Weight (kg)

18000

18000

18000

17600

26000

26000

Op width full (m)

6.4

6.2

6.2

6.3

8.0

9.0

Min op width (m)

2.6

2.8

2.8

2.55

2.8

3.0

Point load front/rear

170kN / 140kN

150kN / 150kN

150kN / 150kN

160kN / 160kN

190kN / 190kN

180kN / 180kN

Alternative machines

T38B

T37B, T37R

T50JB

T48P, T56B

T50JB



0345 745 0000






TRUCK MOUNTS

Bronto
T70B

Bronto
T70B-XR

Bronto
T90B



Working height (m)

70.0

70.0

90.0

Horizontal outreach (m)

34.8

34.8

31.0

Reach below ground

6.0

11.0

12.0

Max horiz outreach* (m)

30.0

30.0

29.0

Closed length (m)

12.5

12.0

15.6

Closed height (m)

4.2

3.9

4.0

Closed width (m)

2.5

2.4

2.5

Platform size (m)

2.4 (3.7) x 1.0

2.4 (3.7) x 1.0

2.4 (3.7) x 1.0

SWL (kg) #

600-120†

600-200†

600-400†

Weight (kg)

36000

36000

48000

Op width full (m)

8.0

8.0

7.0

Min op width (m)

3.2

3.2

N/A

Point load front/rear

255kN / 255kN

230kN / 230kN

270kN / 270kN

Alternative machines

T90B

T70B

T70B



0345 745 0000

63



* With full safe working load





Tracked booms

Tracked boom lifts are fitted with an articulating or telescopic boom, mounted on tracks to reduce ground pressure. They are fitted with outriggers to add stability, making them perfect for difficult access challenges. We offer both self-drive and operated hire options with working heights of up to 31m and horizontal outreach of up to 14.7m.

For more information, advice, training and to hire from our wide range of **tracked booms**, either scan the **QR code**, or call our hire desk experts on **0345 745 0000**.



To meet your changing needs we're constantly investing in our fleet. Visit our website for all our latest products and services.



TRACKED BOOMS

Hinowa
TB14HB

Hinowa
TB14HE








Hinowa
TB15HB

Hinowa
TB15HE



Hinowa
TB17HB



**Working
height (m)**

14.0

14.0

15.4

15.4

17.06

**Horizontal
outreach (m)**

7.0

7.0

6.6

6.6

7.5

Closed length (m)

4.06

4.06

4.02

4.02

4.52

Closed height
(rails up) (m)

1.99

1.99

1.99

1.99

2.0

Closed width (m)

0.78

0.78

0.75

0.75

0.79

Platform size (m)

1.33 x 0.69

1.33 x 0.69

1.33 x 0.69

1.33 x 0.69

1.33 x 0.69

Rotation (°)

360

360

360

360

360

Max SWL (kg) #

200-120†

200-120†

230

230

230

Weight (kg)

1750

1750

1950

1950

2280

Outrigger footprint (m)

2.7 x 2.7

2.7 x 2.7

2.8 x 2.8

2.8 x 2.8

2.88 x 2.89

Min op width (m)

2.7

2.7

2.8

2.8

2.88

Alternative machines

TB14HE, TB17HE
TB17HB

TB14HB, TB17HE
TB17HB

TB15HE, TB17HE
TB17HB

TB15HB, TB17HE
TB17HB

TB17HE, TB20HE
TB20HB

0345 745 0000






65

Harness ON™
fitted on
all BOOMS



Depending on load, angle of rotation and outrigger configuration.





**Working
height (m)**

17.06

17.6

20.1

20.1

20.1

**Horizontal
outreach (m)**

7.5

9.2

9.7

9.7

9.85

Closed length (m)

4.52

5.21

5.01

5.01

5.01

Closed height
(rails up) (m)

2.0

1.95

1.99

1.99

1.99

Closed width (m)

0.79

0.78

0.79

0.79

0.79

Platform size (m)

1.33 x 0.69

0.70 x 1.30

1.33 x 0.69

1.33 x 0.69

1.33 x 0.69

Rotation (°)

360

360

360

360

360

Max SWL (kg) #

230

200

230

230

230

Weight (kg)

2280

2350

2880

2880

2880

Outrigger footprint (m)

2.88 x 2.89

3.1 x 3.1

2.92 x 2.92

2.92 x 2.92

2.92 x 2.92

Min op width (m)

2.88

3.1

2.92

2.92

2.92

Alternative machines

TB17HB, TB20HE
TB20HB

TB20HB

TB20HE, TB26HE
TB26HB

TB20HB, TB26HE
TB26HB

TB20HE, TB26HE
TB26HB, TB20HB

0345 745 0000

Harness ON™
fitted on
all BOOMS



Depending on load, angle of rotation and outrigger configuration.

TRACKED BOOMS

Hinowa
TB26HB

Hinowa
TB26HE



Multitel
TB30MB

Teupen
TB31TB

**Working
height (m)**

**Horizontal
outreach (m)**

Closed length (m)

Closed height
(rails up) (m)

Closed width (m)

Platform size (m)

Rotation (°)

Max SWL (kg) #

Weight (kg)

Outrigger footprint (m)


Min op width (m)

Alternative machines

0345 745 0000

Harness ON™
fitted on
all BOOMS

67



25.7

13.6

6.34

1.98

0.99

1.33 x 0.69

360


230

4415

4.07 x 3.97

3.97

TB26HE



25.7

13.6

6.34

1.98

0.99

1.33 x 0.69

360


230

4415

4.07 x 3.97

3.97

TB26HB



30.0

14.0

6.65

2.3

1.6

0.70 x 1.60

400


400-120†

5600

6.4 x 4.2

3.3

TB30TB



31.0

14.7

7.23

1.98

1.58

1.20 x 0.80

360

250-80†

4350

5.45 x 5.15

2.75

TB26HB
TB26HE



Depending on load, angle of rotation and outrigger configuration.





Telehandlers

Ideal for lifting products and equipment up to heights of 17.5m, our range of telehandlers provide safe working solutions. The range includes a lifting capacity of up to 4000kg.

For more information, advice, training and to hire from our range of **telehandlers**, either scan the **QR code**, or call our hire desk experts on **0345 745 0000**.



To meet your changing needs we're constantly investing in our fleet. Visit our website for all our latest products and services.




TELE- HANDLERS

Manitou
MT625H

Manitou
**MT1033
EASY**


Manitou
**MT1440
EASY**

Manitou
**MT1840
EASY**




5.85

3.4




9.98

7.15



13.53

9.46



17.55

13.08

Working
height (m)

Horizontal
outreach (m)

Closed length (m)

Closed height (m)

Closed width (m)

Max lift cap (kg)

Max lift cap
(with full reach) (kg)

Weight
(with forks) (kg)

Turn radius (m)

3.83

1.92

1.81

2500

800

4800

3.31

4.93

2.3

2.33

3300

1000

7790

3.8

6.13

2.45

2.36

4000

1500

10900

3.94

6.15

2.45

2.36

4000

850

11710

3.94

Alternative machines



0345 745 0000



RT⁴



RT⁴



RT⁴



RT⁴





How to use this guide

This guide is designed to help you select and order the correct piece of equipment for your needs.

Each section is conveniently separated by product type and machines are arranged in order of ascending height. The working envelope and height/reach indicator will provide a quick visual reference to assist your equipment selection.

If you cannot find exactly what you're looking for, need more information, or wish to order equipment, call our expertly trained staff on **0345 745 0000**

Product Type

Working Envelope

Shows approximate area of working space provided by the product.

Working Height / Horizontal Outreach

Specification

These details include product dimensions, Safe Working Load (SWL), platform area, rotation and machine weight.

Alternative Machines

Alternative or similar machines.

BOOMS		AJC 660 SJHCS	AJC 66JX	Skysc SJ66T+	Single BA22ERT	Skysc HT23RTJ	Single BT23HRT
Working height (m)		22.1	22.12	22.19	22.21	22.5	22.51
Horizontal outreach (m)		17.41	17.3	17.38	12.72	18.3	17.28
Reach below ground		1.8	N/A	3.0	1.77	4.0	N/A
Closed length (m)		10.21	N/A	10.4	9.55	10.4	10.16
Closed height (m)		2.58	2.56	2.59	2.55	2.7	2.65
Platform width (m)		2.49	2.48	2.44	2.33	2.47	2.5
Platform area (m²)		2.44 x 0.91	1.85 x 0.91	2.41 x 0.91	1.83 x 0.79	2.44 x 0.91	2.44 x 0.91
Rotation (°)		Continuous	180	360	Continuous	Continuous	Continuous
Max SWL (kg)		454	227	454	230	230	454
Weight (kg)		13262	13500	12585	10100	13400	13200
Op. width full (m)		N/A	N/A	N/A	N/A	N/A	N/A
Alternative machines		SS54C HT23RTJ, SJBRT+, LG72J	GSX	SS54C HT23RTJ, LG72J, SS54JHCS		SS54C SJBRT+, LG72J, SS54JHCS	SS54C
0345 745 0000							

Product Code

Unique reference number.
(Please note this will not necessarily correspond with the original manufacturer's model number or product code)

Product Type (icon)

Indicates powered access classification, e.g. low level, scissor lift or boom lift.

Key

These symbols indicate standard features and optional extras available to hire with the platform.
See below for key table.

Electric / Hybrid

Electric products can be identified by green ELECTRIC product badge.



Hybrid products have jade HYBRID badge.



KEY

0345 745 0000



Battery power



Diesel power



Lithium battery



Hybrid power



Dual fuel option



Gas power option



Rough terrain (2 wheel drive)



Rough terrain (4 wheel drive)



Non-marking tyres

Standard features



IPAF 1a licence type



IPAF 1b licence type



IPAF 3a licence type



IPAF 3b licence type



IPAF PAV licence type



Tracked



Mast boom



Articulating boom



Straight telescopic boom



Outrigger legs



Maximum people in cage*



Push around vehicles



Operator powered



Indoor use only



Self drive



JIB rotation



C1 driving licence type



B driving licence type

Optional extras



SkySiren®



SkySiren® PCS™



SkySentry™



SkyRak®



SkyRakPlus®



SkyRakBoom®



SkyTel™



SkyRakEdge™



SkyShield



SkyScreen™



MHA Material Handling Attachments



Power to platform



Generator



Camera pod



Circular camera cage



Wendy lighting frame



SkyRakMulti™



Call us today

0345 745 0000



Join us on
[LinkedIn.com/company/Nationwide-Platforms](https://www.linkedin.com/company/nationwide-platforms)



Like us on
[Facebook.com/NationwidePlatforms](https://www.facebook.com/NationwidePlatforms)



Follow us on X
[@NWPlatforms](https://twitter.com/NWPlatforms)



Watch our latest videos on
[YouTube.com/NationwidePlatforms](https://www.youtube.com/NationwidePlatforms)





0345 745 0000
nationwideplatforms.co.uk

Nationwide Platforms
15 Midland Court,
Central Park,
Lutterworth,
Leicestershire,
LE17 4PN

Please note that all technical information referred to in this document is intended for guidance purposes only and does not act as a replacement for the manufacturer's specification or equipment user guides which should be referred to prior to placing your order. No responsibility can be accepted in the event that this document contains any errors, omissions or data that is different from that in the manufacturer's specification or equipment user guides.