




21-30 m³/min

Mobiele Luchtcompressoren



Model	9/270	9/300	12/235	17/235	21/215
COMPRESSOR					
Capaciteit - m ³ /min (cfm)	27,0 (950)	30,0 (1060)	23,5 (825)	23,5 (825)	21,5 (750)
Werkdruk - bar (psi)	8,6 (125)	8,6 (125)	12,0 (175)	17,2 (250)	21,0 (300)
Maximale werkdruk - bar (psi)	10,3 (150)	10,3 (150)	13,8 (200)	19 (275)	22,8 (330)
Instelling veiligheidsklep - bar (psi)	15,0 (217)	15,0 (217)	15,0 (217)	28,5 (413)	28,5 (413)
MOTOR					
Merk	Ingersoll Rand	Ingersoll Rand	Ingersoll Rand	Ingersoll Rand	Ingersoll Rand
Type	6IRQ9AE	6IRQ9AE	6IRQ9AE	6IRQ9AE	6IRQ9AE
Aantal cilinders	6	6	6	6	6
Vollast toerental - tpm	1800	1800	1800	1800	1800
Vermogen - kW (pk)	224 (300)	254 (340)	224 (300)	254 (340)	254 (340)
Elektrisch systeem - volt	24	24	24	24	24
Koeling	water	water	water	water	water
Inhoud brandstoftank - liter	550	550	550	550	550
Luchtaansluitingen - BSPT (Britse Norm Gasschroefdraad)	1 x 2" & 3 x 1 1/4"	1 x 2" & 3 x 1 1/4"	1 x 2" & 3 x 1 1/4"	1 x 2" & 3 x 1 1/4"	1 x 2" & 3 x 1 1/4"
GEGEVENS GELUIDSNIVEAU					
Voltoet volledig aan de richtlijn inzake geluidsemissie buitenshuis 2000/14/EC (2006)	LWa	100	100	100	100
BANDENMAAT					
Bandenmaat	750/16 6PR	750/16 6PR	750/16 6PR	750/16 6PR	750/16 6PR
Aantal wielen	4	4	4	4	4
AFMETINGEN MET ONDERSTEL (CE VERSIE)					
Lengte - mm (trekstang omhoog)	4850	4850	4850	4850	4850
Breedte - mm	2004	2004	2004	2004	2004
Hoogte - mm	2290	2290	2290	2290	2290
Bodemspeling - mm	300	300	300	300	300
Gewicht (netto) - kg	4665	4665	4665	4665	4665
Bedrijfsgegewicht - kg	5125	5125	5125	5125	5125
AFMETINGEN ZONDER ONDERSTEL (CE VERSIE)					
Lengte - mm	4520	4520	4520	4520	4520
Breedte - mm	2004	2004	2004	2004	2004
Hoogte - mm	2040	2040	2040	2040	2040
Gewicht (netto) - kg	4465	4465	4465	4465	4465
Bedrijfsgegewicht - kg	4925	4925	4925	4925	4925

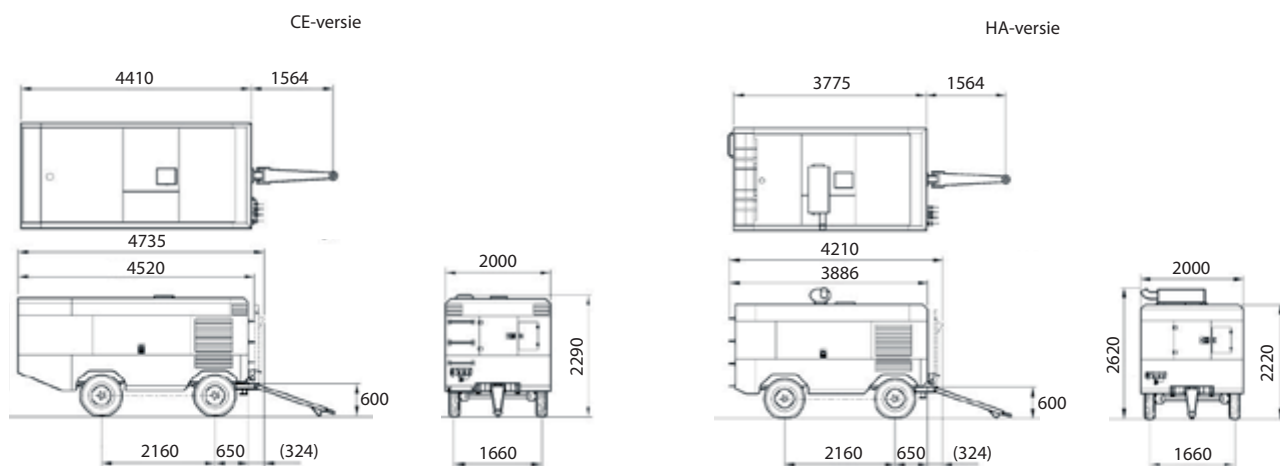

www.doosanportablepower.com

