



CC142

Double drum vibratory rollers

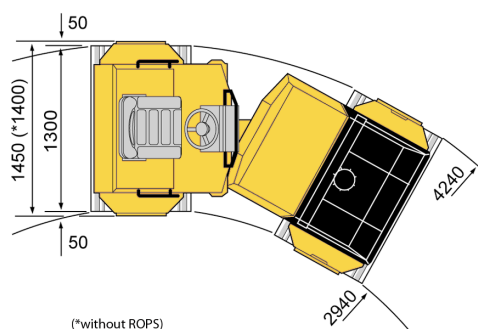

Technical data

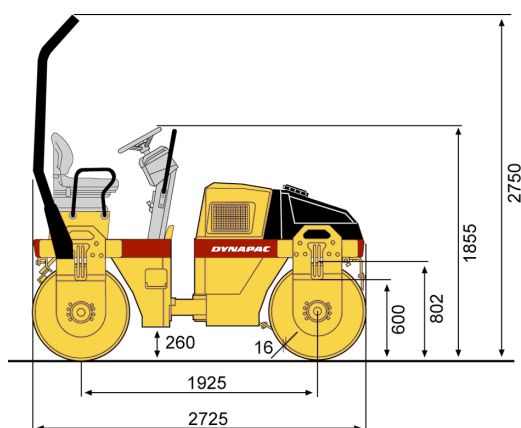

Masses		CC142
Max. operating mass		4,030 kg
Operating mass (incl. ROPS)		3,900 kg
Module mass (front/ rear)		1,900/ 2,000 kg
Traction		
Speed range (km/ h)		0-10
Vertical oscillation		±10°
Theor. gradeability		41 %
Compaction		
Water tank (l)		200
Static linear load (front/ rear)		14.5/ 15.4 kg/ cm
Centrifugal force		33 kN
Nominal amplitude		0.5 mm
Vibration frequency		52 Hz
Engine		
Manufacturer/ Model		Deutz D2011 L03 I
Type		Air cooled diesel
Rated power, SAE J1995		34 kW (45.0 hp) @ 2,600 rpm
Fuel tank capacity		50 l
Hydraulic system		
Driving	Axial piston pump with variable displacement and servo. 2 radial piston motors with constant displacement.	
Vibration	Gear pump/ motors with constant displacement.	
Steering	Gear pump with constant displacement.	
Service brake	Hydrostatic in forward and reverse lever.	
Parking/ Emergency brake	Failsafe brake in both drums.	

Find your local dealer at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.
The above information is a general description only, all informations are supplied without liability.