

Specifications

Models	S-80	S-85
Measurements	Metric	US
Working height maximum*	26.38 m	86 ft
Platform height maximum	24.38 m	80 ft
Horizontal reach maximum	21.80 m	71 ft 6 in
Below ground reach	1.85 m	6 ft 1 in
A Platform length - 8 ft model	0.91 m	3 ft
Platform length - 6 ft model	0.76 m	2 ft 6 in
B Platform width - 8 ft model	2.44 m	8 ft
Platform width - 6 ft model	1.83 m	6 ft
C Height - stowed	2.80 m	9 ft 2 in
D Length - stowed	11.13 m	36 ft 6 in
Length - transport (jib tucked under)		11.60 m
E Width	2.50 m	8 ft 2 in
F Wheelbase	2.85 m	9 ft 4 in
G Ground clearance - center	0.33 m	13 in

Productivity

Lift capacity	227 kg	500 lbs
Platform rotation	160°	160°
Vertical jib rotation		135° (+ 78° /- 57°)
Turntable rotation	360° continuous	360° continuous
Turntable tailswing	1.42 m	4 ft 8 in
Drive speed - stowed	5.4 km/h	3.3 mph
- raised/extended	30 cm/s	1 ft/s
Gradeability - 2WD - stowed**	30%	30%
- 4WD - stowed**	45%	45%
Turning radius - axle extended: inside	3.66 m	12 ft
outside	6.55 m	21 ft 6 in
Controls	12V DC proportional	12V DC proportional
Tyres - RT foam filled	18-625, 16 ply	18-625, 16 ply

Power

Power source	Deutz TD2011 L04i 4 cylinder turbo diesel 74 hp (55 kW) Perkins 804D-33 4 cylinder diesel 63 hp (47 kW) Continental TME27 4 cylinder Gasoline/LPG 74 hp (55 kW)			
Auxiliary power unit	12V DC	12V DC	12V DC	12V DC
Hydraulic tank capacity	151 L	40 gal	151 L	40 gal
Fuel tank capacity - diesel	132 L	35 gal	132 L	35 gal
- gas/LPG	113.6 L	30 gal	113.6 L	30 gal

Sound & Vibration Levels

Sound pressure level (ground workstation)	83 dBA	83 dBA	83 dBA	83 dBA
Sound pressure level (platform workstation)	71 dBA	71 dBA	71 dBA	71 dBA
Vibration	<2.5 m/s²	<8 ft 2 in/s²	<2.5 m/s²	<8 ft 2 in/s²


Weight***

2WD	16,057 kg	35,400 lbs	17,191 kg	37,900 lbs
4WD	16,103 kg	35,500 lbs	17,236 kg	38,000 lbs


Standards Compliance

EU Directives: 2006/42/EC - Machinery (harmonized standard EN280:2001+A2:2009); 2004/108/EC (EMC); 2000/14/EC (Outdoor Noise)

Range Of Motion S-80

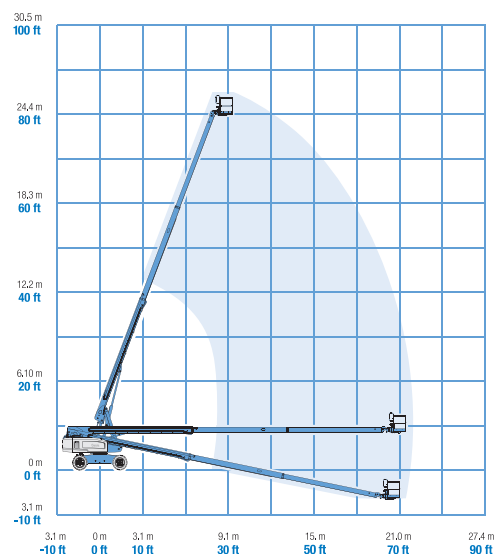


Range Of Motion S-85

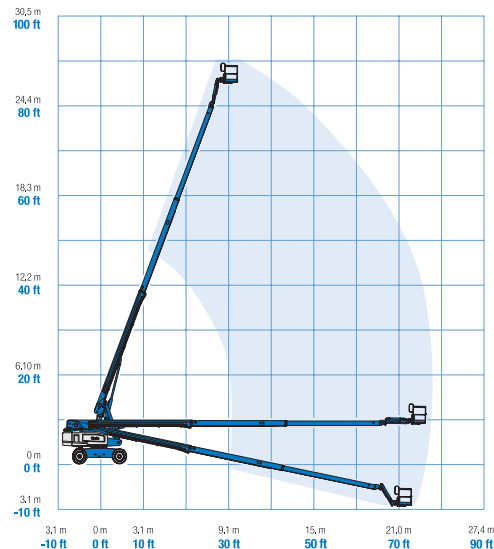

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

** Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.

*** Weight will vary depending on options and/or country standards.

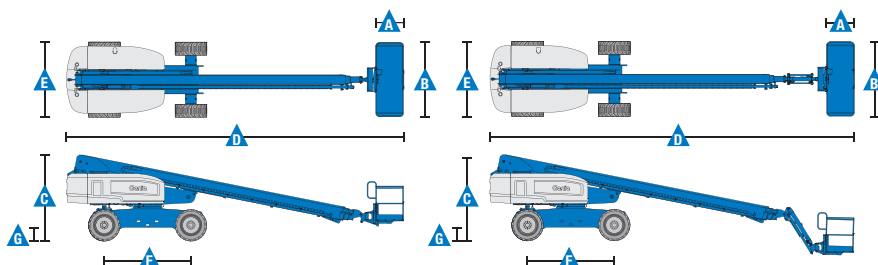

Features

Standard Features

Measurements

S-80

- 26.38 m (86 ft) working height
- 21.8 m (71 ft 6 in) horizontal reach
- 227 kg (500 lbs) lift capacity

S-85

- 27.90 m (91 ft) working height
- 23.32 m (76 ft 6 in) horizontal reach
- 227 kg (500 lbs) lift capacity

Productivity

- Self levelling platform
- Hydraulic platform rotation
- Half mesh platform inserts with swing gate ⁽¹⁾
- Fully proportional Hall effect joystick controls
- Thumb rocker steering
- Drive enable
- AC power cord to platform
- Tilt alarm
- Descent & travel alarms
- Flashing beacon
- Horn
- Hour meter
- 360° continuous turntable rotation
- Positive traction drive
- Two speed wheel motors
- Certified load sensor

Power

- 12V DC auxiliary power
- Anti-restart engine protection
- Auto engine fault shutdown

Easily Configured To Meet Your Needs

Platform Options

- Steel 2.44 m (8 ft)
- Steel 1.83 m (6 ft)
- Steel 2.44 m (8 ft) tri-entry

Jib Options

- Non-jib
- 1.52 m (5 ft) articulating jib boom

Engine Options

- Deutz turbocharged diesel 74 hp (55 kW)
- Perkins diesel 47 kW (63 hp)
- Continental Gas/LPG 55 kW (74 hp)

Drive Options

- 2 x 4
- 4 x 4

Axle

- Fixed width with active oscillation

Tyre Options

- Rough terrain foam-filled (standard)
- Rough terrain non-marking foam-filled



Options & Accessories

Productivity Options

- 340 kg capacity, S-80 only ⁽²⁾, includes extra counterweight
- Platform swing gate ⁽¹⁾
- Half mesh platform inserts with swing gate ⁽¹⁾
- Platform top auxiliary rail
- Weld leads to platform ⁽²⁾
- Air line to platform
- Power to platform (incl. plug, socket and ground fault interrupt leakage on request)
- Work lights package (2 on chassis, 2 on platform)
- Dual axis joystick steering
- Hydraulic oil cooler
- Biodegradable hydraulic oil ⁽²⁾
- Hostile environment kit ⁽²⁾: cylinder bellows, boom wiper seals, platform and ground control box cover
- Deluxe hostile environment kit ^(2,3): adds to basic kit ring gear guard, cable track hose cover and air pre-cleaner
- Aircraft protection kit ^(1,3): platform foam padding and padded disable system
- Tilt cut-out option
- Track & Trace ⁽⁴⁾ (GPS unit providing machine location & operating information)
- Lockable platform control box covers
- Tow package ⁽²⁾
- Tool tray

Power Options

- Engine gauge package ⁽²⁾: oil pressure, temp & amp
- AC generator packages (110V/-220V/50Hz, 3000W) ⁽²⁾
- Deutz v-belt generator kit (110V/220V) ⁽³⁾
- Diesel air intake pre-cleaner ⁽²⁾
- Diesel catalytic scrubber muffler
- LPG tank only, steel, 33.5 lbs (15.19 kg) capacity ⁽³⁾
- Low temperature cut-out module
- Engine heater ⁽³⁾
- Refinery kit with spark arrestor and electric or mechanical Chalwyn valve ⁽³⁾

⁽¹⁾ Not available on tri-entry platforms

⁽²⁾ Factory-fit option only

⁽³⁾ Available on selected models only. See your Genie representative for further information.

⁽⁴⁾ Includes a first 2 years subscription