


Genie® Superlift Contractor Specifications

Material Lift

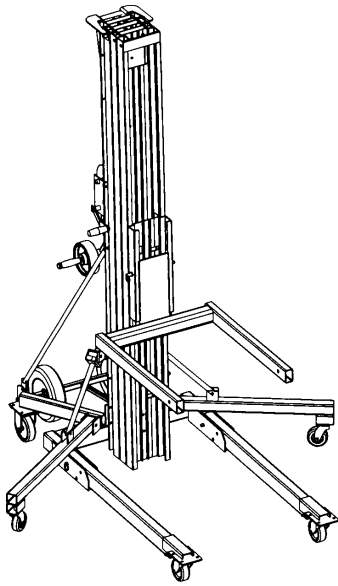

STANDARD FEATURES

- Designed to roll through standard 32-inch (81 cm) doorway
- Telescoping mast system
- Interchangeable load handling attachments
- Quick setup
- Compact design
- Easy to load onto transport vehicle
- Rear transport wheel assembly

SPECIFICATIONS

MODEL	SLC-12		SLC-18		SLC-24	
	US	Metric	US	Metric	US	Metric
Height - stowed	86 in	2.18 m	86 in	2.18 m	86 in	2.18 m
Length - stowed	34 in	86 cm	34 in	86 cm	34 in	86 cm
Length - operating	63 in	1.6 m	73 in	1.85 m	81 in	2.06 m
Width	31 ½ in	80 cm	31 ½ in	80 cm	31 ½ in	80 cm
Width - stabilizers lowered	66 in	1.68 m	66 in	1.68 m	66 in	1.68 m
Ground clearance	2 in	5 cm	2 in	5 cm	2 in	5 cm
Load height - minimum	6 in	15 cm	6 in	15 cm	6 in	15 cm
Weight - standard base	204 lb	93 kg	307 lb	139 kg	374 lb	170 kg
Average cranks						
Standard winch	8 ½/ft	27.8/m	8 ½/ft	27.8/m	8 ½/ft	27.8/m
Two-speed winch, high	4/ft	13.1/m	4/ft	13.1/m	4/ft	13.1/m
Two-speed winch, low	15/ft	49.2/m	15/ft	49.2/m	15/ft	49.2/m

Load Capacity

14 in (36 cm) load center	650 lb	295 kg	650 lb	295 kg	650 lb	295 kg
24 in (61 cm) load center	425 lb	193 kg	425 lb	193 kg	425 lb	193 kg
42 in (1.07 m) load center	180 lb	82 kg	160 lb	73 kg	160 lb	73 kg

Working Height

Standard forks						
forks down	11 ft 2 in	3.4 m	16 ft 9 in	5.1 m	22 ft 3 in	6.78 m
forks up	12 ft 11 in	3.94 m	18 ft 6 in	5.64 m	24 ft	7.32 m
Adjustable forks						
forks down	11 ft 2 in	3.4 m	16 ft 9 in	5.1 m	22 ft 3 in	6.78 m
forks up	12 ft 11 in	3.94 m	18 ft 6 in	5.64 m	24 ft	7.32 m
Boom	12 ft 2 in	3.7 m	17 ft 9 in	5.41 m	23 ft 3 in	7.1 m

Load Handling Attachments

	Length		Width	
	US	Metric	US	Metric
Standard forks	28 in	71 cm	23 in	58 cm
Adjustable forks	27 ½ in	70 cm	11 to 30 in	28 to 76 cm
Boom	18 to 42 in	46 to 107 cm	1 ½ in	4 cm
Pipe cradle	27 ½ in	70 cm	24 in	61 cm
Load platform	26 ¼ in	67 cm	23 in	58 cm
Fork extensions (each)	30 in	76 cm	2 in	5 cm
	Depth		Weight	
	US	Metric	US	Metric
Standard forks	2 ½ in	6 cm	26 ½ lb	12 kg
Adjustable forks	2 ½ in	6 cm	52 ½ lb	24 kg
Boom	6 in	15 cm	34 ½ lb	16 kg
Pipe cradle	6 in	15 cm	10 lb	4 ½ kg
Load platform	2 ½ in	6 cm	26 ½ lb	12 kg
Fork extensions (each)	3 in	8 cm	4 ½ lb	2 kg

Genie Industries

USA 18340 NE 76th Street
P.O. Box 97030
Redmond, Washington 98073-9730
Telephone (425) 881-1800
Toll Free USA/Canada 800-536-1800
Fax (425) 883-3475
<http://www.genielift.com>

UK The Maltings, Wharf Road
Grantham
Lincolnshire NG31 6BH
Telephone (44) 01476-584333
Fax (44) 01476-584334
<http://www.genielift.com>

Continuous improvement of our products is a Genie policy. Product specifications are subject to change without notice or obligation. The drawings in this brochure are for illustrative purposes only. Refer to the appropriate Genie Superlift Contractor Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using a Genie Superlift Contractor, or to otherwise act irresponsibly, may result in serious injury or death. Copyright © 1997 by Genie Industries. "Genie" is a Registered Trademark of Genie Industries in the USA and many other countries. "Superlift" is a Trademark of Genie Industries. Genie is the owner of U.S. Patents 5,584,363; 5,667,352; 5,515,945; 5,645,142 and Patents Pending. 1-22-01