



Self Priming Centrifugal Pump

Models 13D-L70EE and 13D-L70EE S/G
13D1-L70EE and 13D1-L70EE S/G

Size 3" x 3"



18 MTC

Click here
for prices
or to buy now

Total Head		Capacity Of Pump In U.S. Gallons Per Minute (GPM) At Continuous Performance				
P.S.I.	Feet					
30.3	70	75	75	75	75	75
26.0	60	153	158	158	158	158
21.7	50	178	220	233	233	233
17.3	40	180	237	280	285	285
13.0	30	183	244	292	321	328
8.7	20	185	250	297	337	362
4.3	10	185	254	305	345	385
Suction Lift		25'	20'	15'	10'	5'

PUMP SPECIFICATIONS

Size: 3" x 3" (76 mm x 76 mm) NPT - Female.

Casing: Aluminum Alloy 356-T6 w/Gray Iron 30 Cutwater Insert.
Maximum Operating Pressure 55 psi (379 kPa).*

Semi-Open Type, Two Vane Impeller: Ductile Iron 65-45-12.
Handles 1 1/2" (38,1 mm) Diameter Spherical Solids.

Replaceable Wear Plate: Carbon Steel ASTM A36.

Removable Cover Plate: Aluminum Alloy 356-T6; 4 lbs. (1,8 kg).

Intermediate Bracket: Aluminum Alloy 356-T6.

Seal:

(13D-L70EE, 13D-L70EE S/G) Double, Grease-Lubricated w/Spring-Loaded Grease Cup. Sintered Bronze Stationary Seal Seats. Steel Rotating Faces. Neoprene Packing Rings. Maximum Temperature of Liquid Pumped 110°F (43°C). Maximum Suction Pressure 10 psi (69 kPa).*

(13D1-L70EE, 13D1-L70EE S/G) Type 31, Mechanical, Self-Lubricated. Silicon Carbide Rotating and Stationary Faces. Fluorocarbon Elastomers (DuPont Viton® or Equivalent). Stainless Steel 18-8 Cage and Spring. Maximum Temperature of Liquid Pumped 160°F (71°C).*

Seal Liner: (13D-L70EE, 13D-L70EE S/G) Copper Alloy C26000.

Shaft Sleeve: (13D1-L70EE, 13D1-L70EE S/G) Alloy Steel 4130.

Flap Valve: Buna-N w/Nylon Reinforcement; Steel and Brass.

Suction Flange: Aluminum Alloy 356-T6.

Gaskets: Cork w/Nitrile Binder (NC710).

O-Rings: Buna-N.

Hardware: Standard Plated Steel.

Roll Cage with Rubber Feet.

90° Discharge Elbow.

Strainer.

Optional Equipment: Wheel Kit w/Semi-Pneumatic Tires.

*Consult Factory for Applications Exceeding
Maximum Pressure and/or Temperature Indicated.



WARNING!

Do not use in explosive atmosphere or for pumping volatile flammable liquids.

ENGINE SPECIFICATIONS

Model: Yanmar L70EE.

Type: Single Cylinder, Four Cycle, Air Cooled, Diesel Engine.

Displacement: 18.7 Cu. In. (306 cc).

Lubrication: Forced Circulation.

Air Cleaner: Dry Type.

Fuel Tank:

(13D/13D1-L70EE) 0.92 U.S. Gal. (3,5 liters).

(13D/13D1-L70EE S/G) 1.45 U.S. Gal. (5,5 liters).

Full Load Operating Time:

(13D/13D1-L70EE) 2.2 Hours.

(13D/13D1-L70EE S/G) 3.4 Hours.

Starter:

(13D/13D1-L70EE) Rope Rewind.

(13D/13D1-L70EE S/G) 12 Volt Electric.

Standard Equipment: Exhaust Silencer Muffler w/Guard. 90° Exhaust Deflector. Hand Throttle and Stop Control.

YANMAR PUBLISHED PERFORMANCE:

Maximum Net Continuous B.H.P.
5.8 (4,3 kW) @ 3600 RPM



GORMAN-RUPP PUMPS

www.grpumps.com

Specifications Subject to Change Without Notice



DJ Gongol & Associates, Inc.


PO Box 180 | West Des Moines, IA 50061-0180
4328 North Dawson | Cumming, IA 50061
515-223-4144 | 515-981-0581 fax
info@gongol.net

Specification Data


SECTION 45, PAGE 565

APPROXIMATE
DIMENSIONS and WEIGHTS

NET WEIGHT: 13D-L70EE, 13D1-L70EE 139 LBS. (63 KG.)
SHIPPING WEIGHT: 124 LBS. (56 KG.) 144 LBS. (65 KG.)
EXPORT CRATE: 8 CU. FT. (0,2 CU. M.)
WHEEL KIT ADD WEIGHT: 25 LBS. (11,3 KG.);
SHIPPING CRATE (SEPARATE): 3 CU. FT. (0,1 CU. M.)

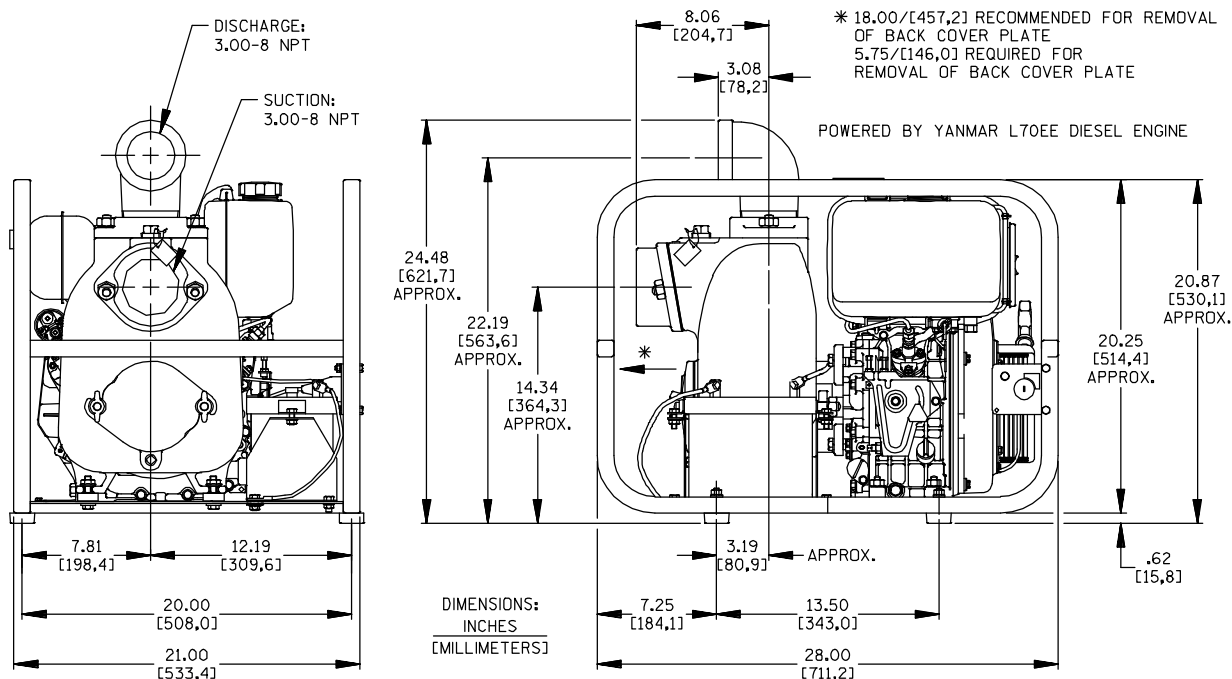

MODEL 13D-L70EE S/G SHOWN

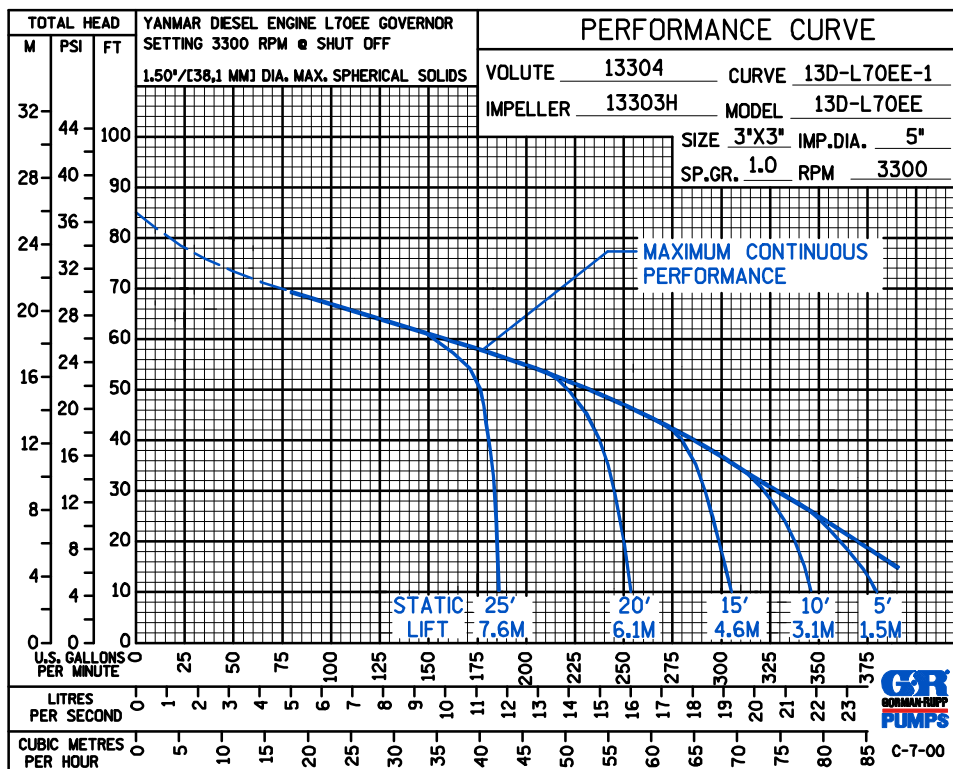

GORMAN-RUPP PUMPS

www.grpumps.com

Specifications Subject to Change Without Notice

© Copyright Gorman-Rupp Pumps 2014



DJ Gongol & Associates, Inc.

PO Box 180 | West Des Moines, IA 50061-0180
4328 North Dawson | Cumming, IA 50061
515-223-4144 | 515-981-0581 fax
info@gongol.net