

SCALA2 3-45 AKCCDE 1x200-240V 50/60Hz

Grundfos pump 98562862



Thank you for your interest in our products. Please contact us for more information, or visit our website

<https://www.lenntech.com/grundfos/SCALA/98562862/SCALA2-3-45-A.html>

info@lenntech.com



tel. +31 152 610 900

fax. +31 152 616 289



Position	Qty.	Description														
	1	 Product No.: On request Grundfos SCALA2 is a fully integrated, self-priming, compact waterworks for pressure boosting in domestic applications. SCALA2 incorporates integrated speed control enabling the keeping of the perfect pressure at the taps, meaning that the pump performance will increase with increasing demand. SCALA2 can be installed in three easy steps: 1. Connect the pipes. 2. Prime the pump. 3. Plug the pump into the power outlet and the pump will start. Grundfos SCALA2 has all the components necessary to ensure a comfortable pressure: • intelligent controller • integrated speed-controlled drive • integrated tank • integrated sensors • integrated non-return valves. As it is self-priming, the SCALA2 is able to pump water from a level below the pump. Provided it is filled with water, the pump is able to lift water from a depth of 8 m in less than 5 minutes. This facilitates easy installation and start-up of the pump and provides more reliable water supply in installations where there is a risk of dry running and leakages in suction hose or pipes. If exposed to dry running, water shortage or excessive temperature, blocked pump, for example in case of seizure or overload, the pump will stop automatically, thus preventing a motor burnout. The pump features an automatic reset function. In case of dry running or similar alarm, the pump will stop. Restarting will be attempted every 5 minutes 8 times, there after new restart attempt will occur every 24 hours. The automatic reset function can be deactivated. Thanks to its hydraulic design, permanent magnet motor and water cooling, the pump is extremely low-noise, 47 dB(A) in typical use, which makes it suitable for indoor as well as outdoor use. Max noise level at full load are 53 dB(A) The built-in pressure tank reduces the number of starts and stops in case of leakages in the pipe system, causing less wear on the pump. SCALA2 require no maintenance, but it is recommended to keep the pump clean, check the non-return valves and keep the ventilation holes free of dust Liquid: <table><tr><td>Pumped liquid:</td><td>Water</td></tr><tr><td>Liquid temperature range:</td><td>0 .. 45 °C</td></tr><tr><td>Liquid temperature during operation:</td><td>20 °C</td></tr><tr><td>Density:</td><td>998.2 kg/m³</td></tr></table> Technical: <table><tr><td>Rated flow:</td><td>3 m³/h</td></tr><tr><td>Rated head:</td><td>27 m</td></tr><tr><td>Primary shaft seal:</td><td>CARBON/CERAMIC</td></tr></table>	Pumped liquid:	Water	Liquid temperature range:	0 .. 45 °C	Liquid temperature during operation:	20 °C	Density:	998.2 kg/m³	Rated flow:	3 m³/h	Rated head:	27 m	Primary shaft seal:	CARBON/CERAMIC
Pumped liquid:	Water															
Liquid temperature range:	0 .. 45 °C															
Liquid temperature during operation:	20 °C															
Density:	998.2 kg/m³															
Rated flow:	3 m³/h															
Rated head:	27 m															
Primary shaft seal:	CARBON/CERAMIC															

Position	Qty.	Description
		Approvals on nameplate: CE,VDE,AAA Approvals for drinking water: WRAS,ACS Curve tolerance: ISO9906:2012 3B Materials: Pump housing: NORYL FE1630PW PPE+PS-GS30 Impeller: NORYL FE1630PW PPE+PS-GS30 Installation: Range of ambient temperature: 0 .. 55 °C Maximum operating pressure: 10 bar Maximum permissible inlet pressure: 6 bar Pipe connection: G 1 Composite Electrical data: Power input - P1: 550 W Mains frequency: 50 Hz Rated voltage: 1 x 200-240 V Rated current: 2.8 A Enclosure class (IEC 34-5): IPX4D Insulation class (IEC 85): F Length of cable: 2 m Power plug: Type E/F (CEE7/7) Others: Net weight: 9.55 kg Gross weight: 11.9 kg Shipping volume: 0.044 m³ Storage temperature range: -40 .. 70 °C Danish VVS No.: 385183145 Swedish RSK No.: 5931159 Finnish: 4732505 Norwegian NRF no.: 9040011


On request SCALA2 3-45 A 50 Hz

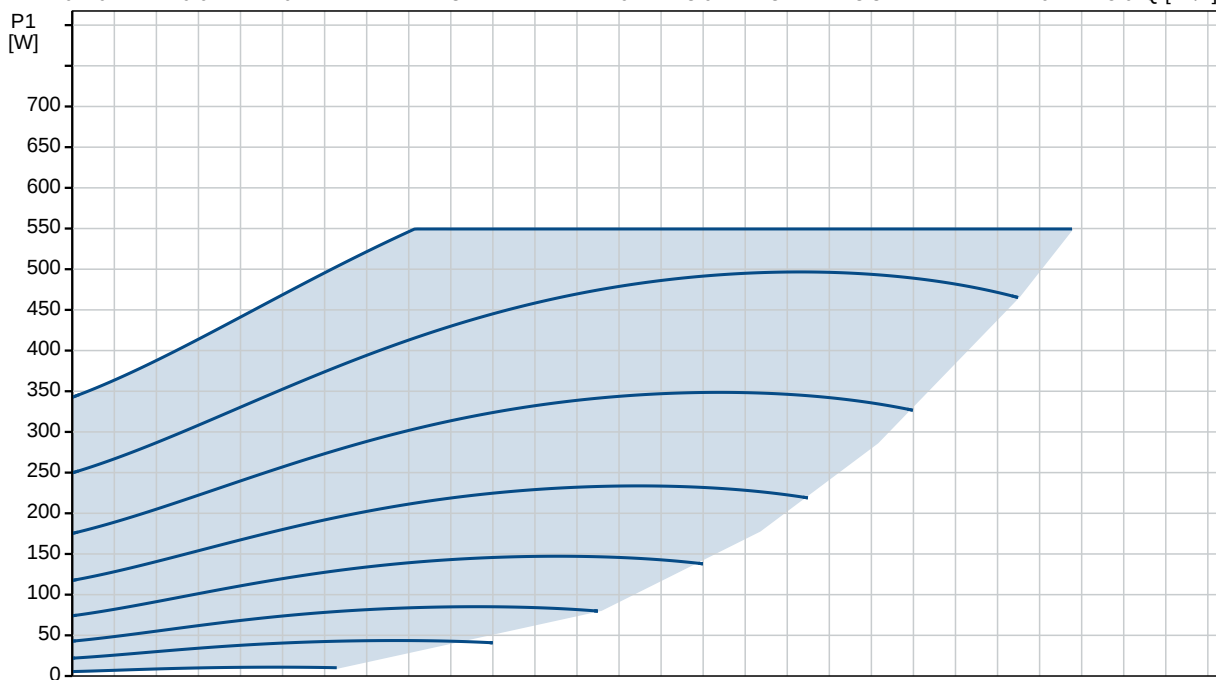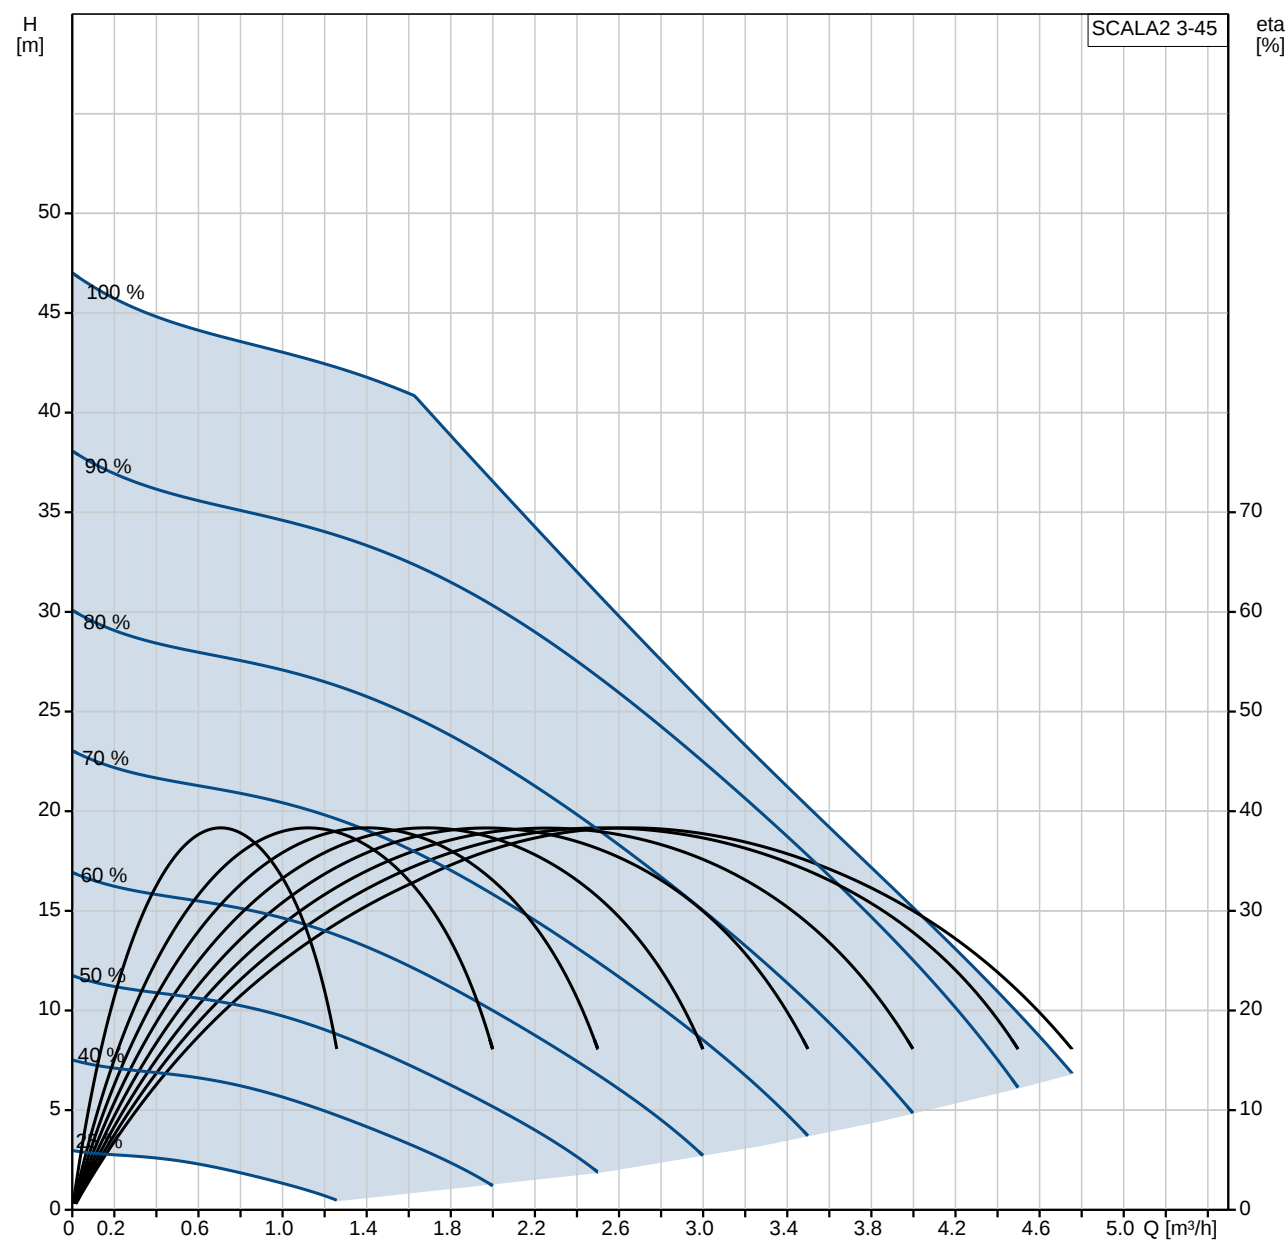

Description	Value
General information:	
Product name:	SCALA2 3-45 A
Product No:	On request
EAN number:	On request
Technical:	
Rated flow:	3 m³/h
Rated head:	27 m
Head max:	45 m
Primary shaft seal:	CARBON/CERAMIC
Approvals on nameplate:	CE,VDE,AAA
Approvals for drinking water:	WRAS,ACS
Curve tolerance:	ISO9906:2012 3B
Model:	A
Materials:	
Pump housing:	NORYL FE1630PW PPE+PS-GS30
Impeller:	NORYL FE1630PW PPE+PS-GS30
Material code:	A
Installation:	
Range of ambient temperature:	0 .. 55 °C
Maximum operating pressure:	10 bar
Maximum permissible inlet pressure:	6 bar
Pipe connection:	G 1 Composite
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	0 .. 45 °C
Liquid temperature during operation:	20 °C
Density:	998.2 kg/m³
Electrical data:	
Power input - P1:	550 W
Mains frequency:	50 Hz
Rated voltage:	1 x 200-240 V
Rated current:	2.8 A
Enclosure class (IEC 34-5):	IPX4D
Insulation class (IEC 85):	F
Length of cable:	2 m
Power plug:	Type E/F (CEE7/7)
Others:	
Net weight:	9.55 kg
Gross weight:	11.9 kg
Shipping volume:	0.044 m³
Storage temperature range:	-40 .. 70 °C
Danish VVS No.:	385183145
Swedish RSK No.:	5931159
Finnish:	4732505
Norwegian NRF no.:	9040011

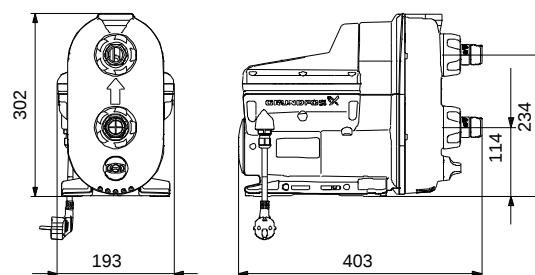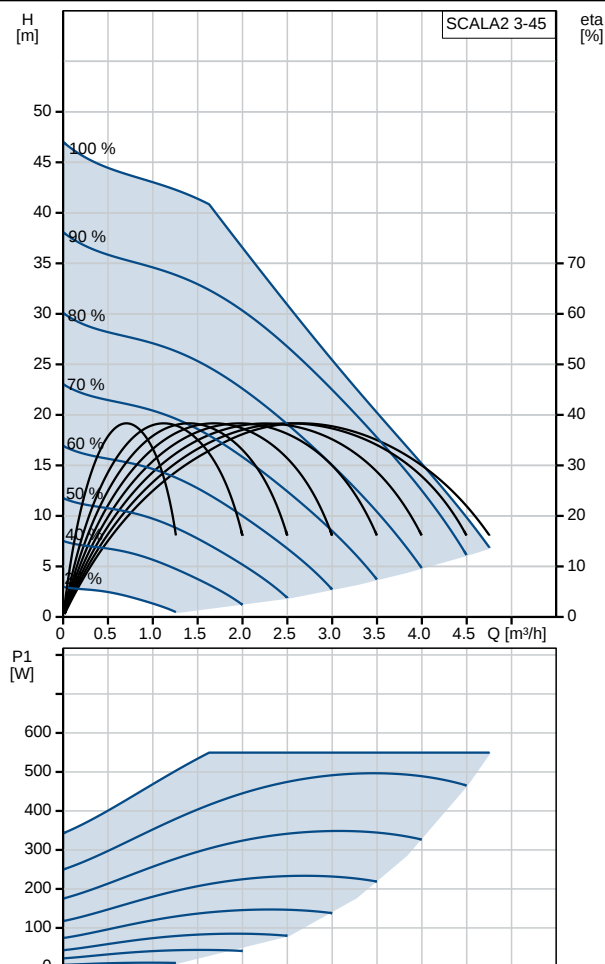


On request SCALA2 3-45 A 50 Hz

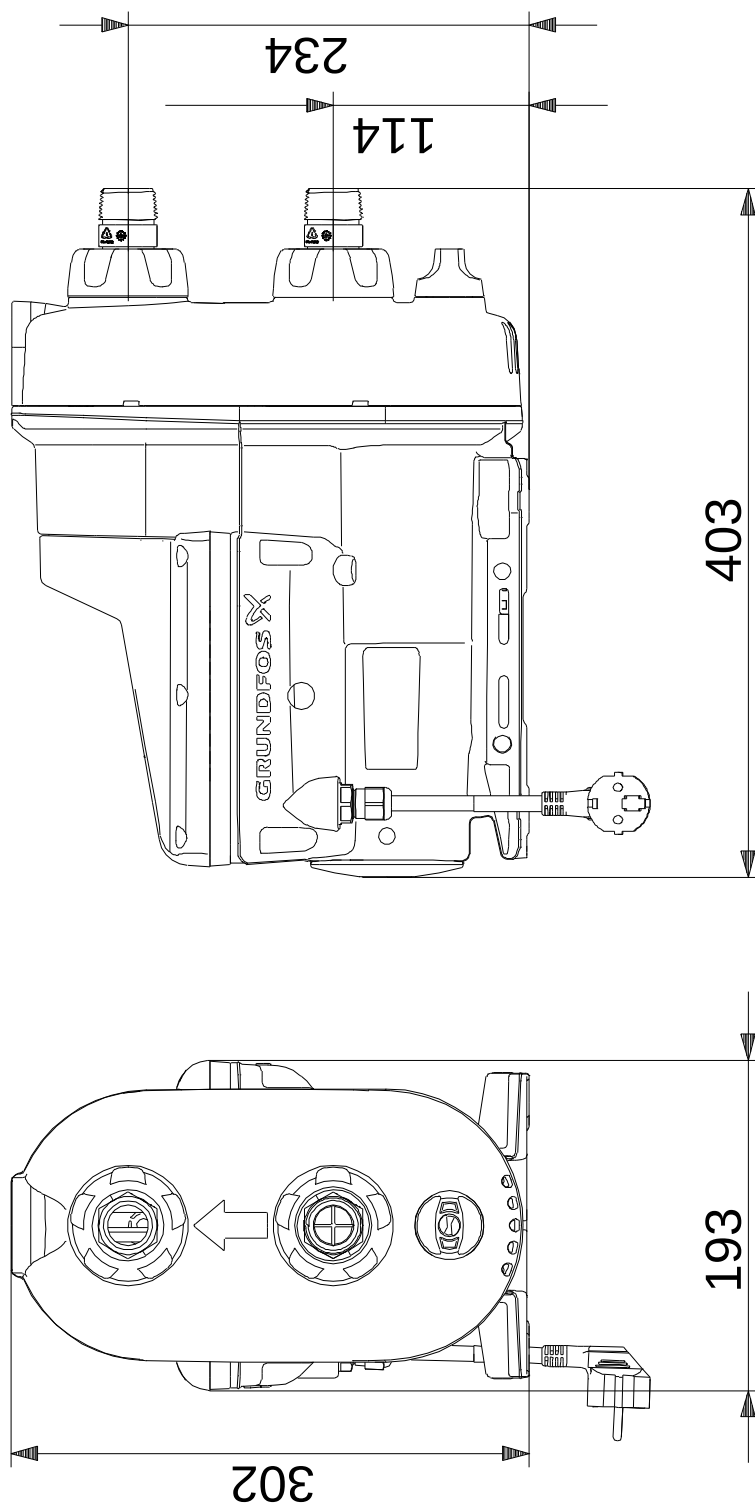


Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

Exploded view

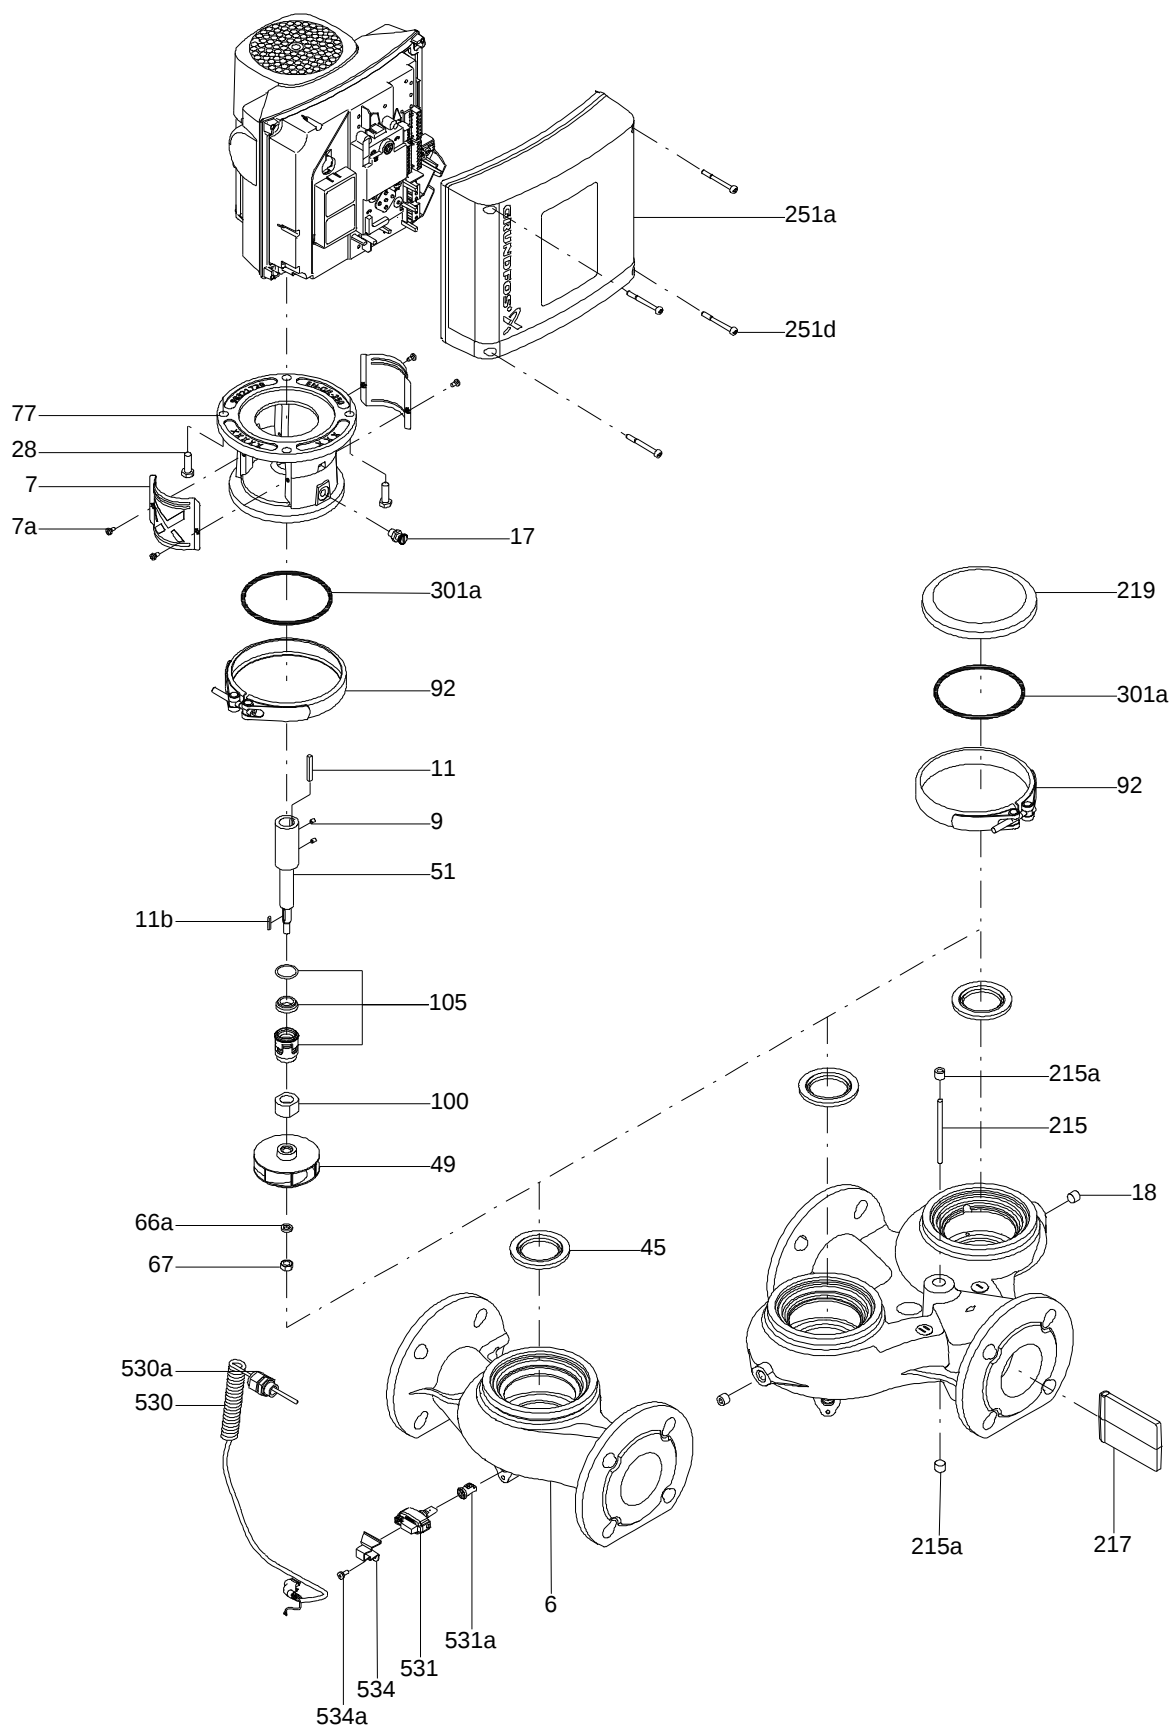


Sectional drawing (TM058200 for TPE2,TPE3)

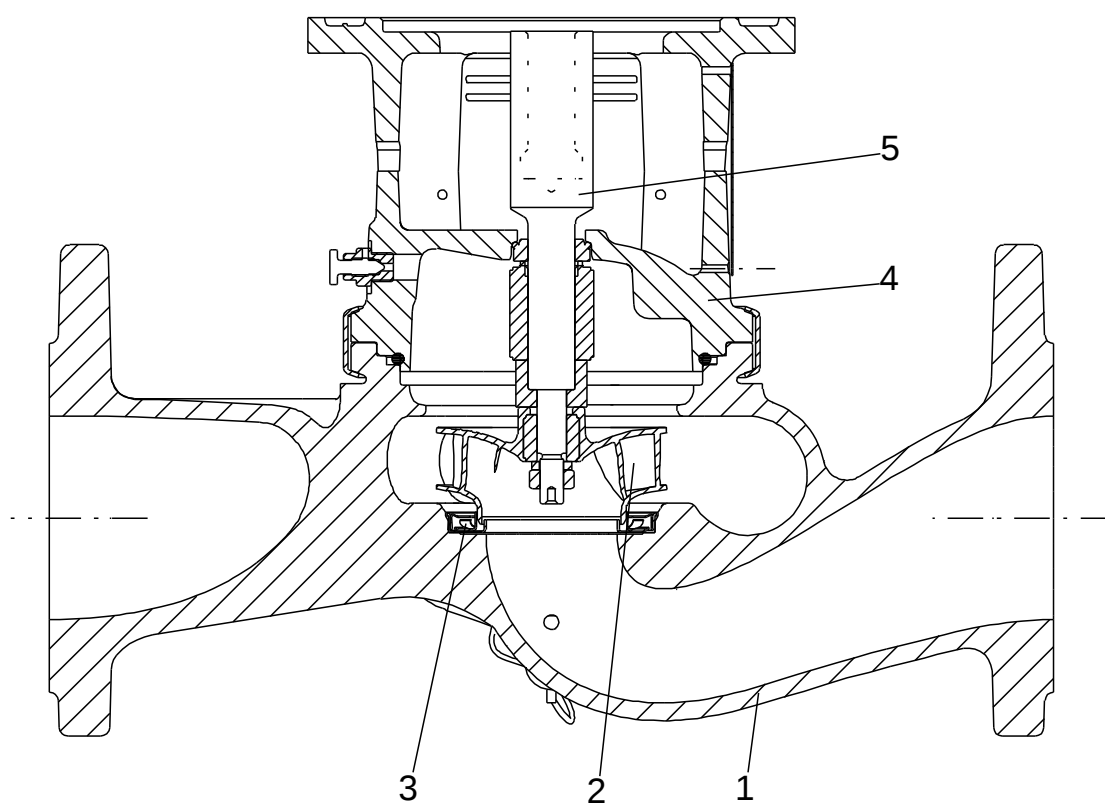

TM058200

Exploded view (TM057026 for MGE model H/I)

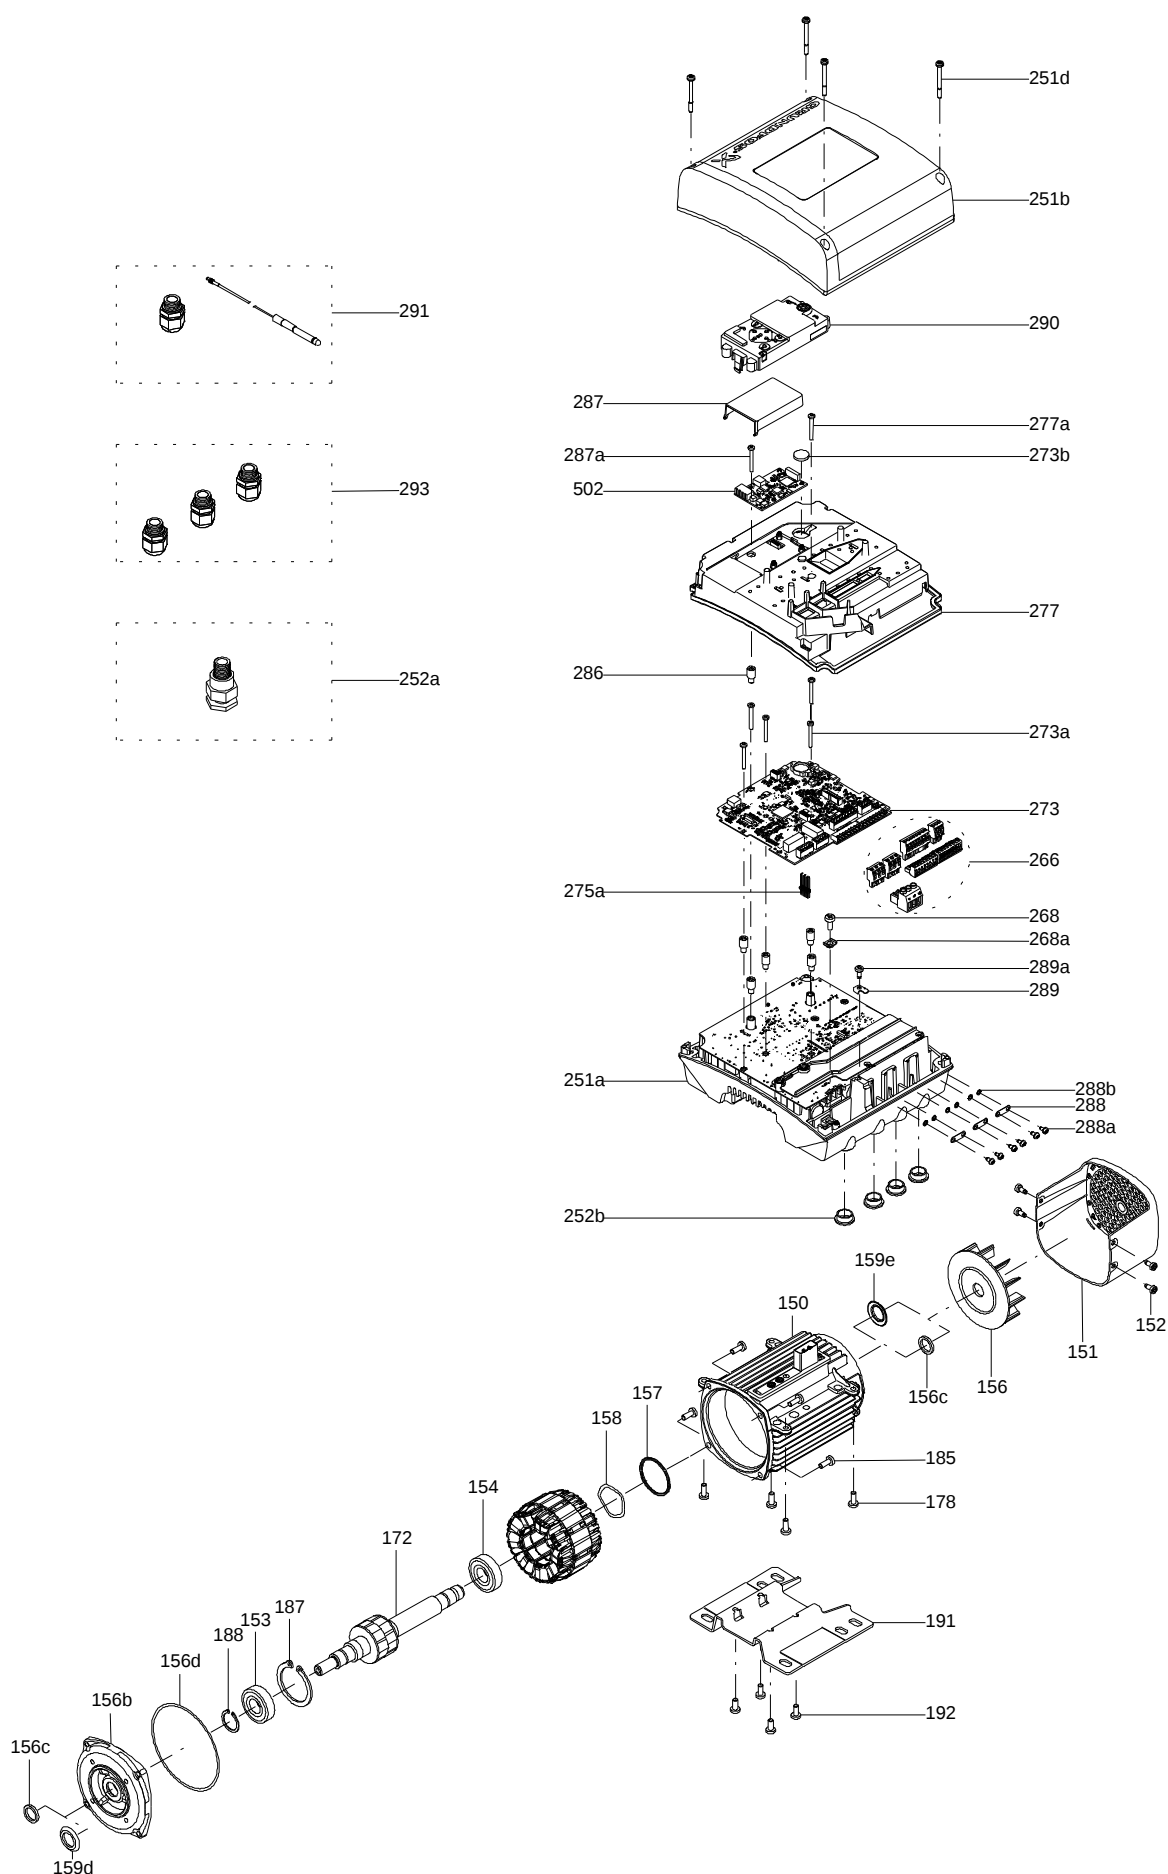

Disclaimer: The information about the Grundfos pump in this document may be outdated.

Data may be subject to alterations without further notice.

Please contact us to verify the data above is still accurate/up-to-date.

All information is copyright Grundfos.



info@lenntech.com

<https://www.lenntech.com>

tel. +31 152 610 900

fax. +31 152 616 289