


ROUGH TERRAIN SCISSOR LIFTS

	3394RT	4394RT
Platform Height – Elevated	10.05 m	13.10 m
A. Platform Height – Lowered	1.57 m	1.79 m
B. Platform Railing Height	1.10 m	1.10m
C. Stowed Height (Rails Folded)	1.97 m	2.19 m
D. Platform Size	2.18 m x 3.81 m	2.18 m x 3.81 m
Front Deck Extension	1.22 m	1.22 m
Rear Deck Extension	1.22 m	1.22 m
E. Overall Width	2.39 m	2.39 m
F. Overall Length ¹	3.81 m	3.81 m
G. Wheelbase	2.95 m	2.95 m
Ground Clearance	0.30 m	0.30 m
Platform Capacity	1,020 kg	680 kg
Capacity with Optional Deck Extension	905 kg	565 kg
Capacity on Optional Deck Extension	225 kg	225 kg
Lift/Lower Time	30/30 sec.	40/43 sec.
Maximum Drive Height	10.05 m	13.10 m
Gross Vehicle Weight *	5,850 kg	6,900 kg
Drive Speed 2WD	–	–
Drive Speed 4WD	6.4 km/h	6.4 km/h
Gradeability 2WD	–	–
Gradeability 4WD	45%	45%
Turning Radius – Inside	2.71 m	2.71 m
Turning Radius – Outside	5.93 m	5.93 m
Axle Oscillation	0.20 m	0.20 m
Tyres	33/1550 x 16.5 Foam Filled	33/1550 x 16.5 Foam Filled
Diesel Engine	34 kW Deutz F3M1011F	34 kW Deutz F3M1011F
Fuel Tank Capacity	113 L	113 L
Hydraulic Reservoir	151 L	151 L

¹ Overall length with optional leveling jacks is 4.75 m.

* Certain options or country standards will increase weight.

Specifications may change to meet country standards or with the addition of optional equipment.

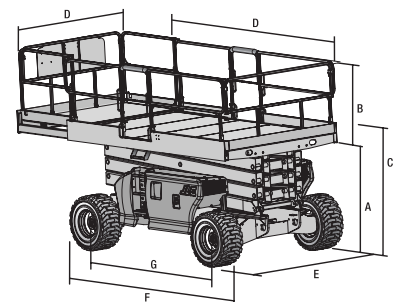

Standard Features and Available Options

RT SERIES ROUGH TERRAIN SCISSOR LIFTS

	3394RT	4394RT
Platform		
2.18 m x 3.81 m platform (deck extension retracted)	●	●
1.22 m manual front deck extension	●	●
1.22 m manual rear deck extension	○	○
1.23 m powered dual deck extension	○	○
Fold down handrails	●	●
Half swing gate	●	●
Lanyard attach points	●	●
Full proportional drive/steer joystick control	●	●
Moveable and removable platform console box	●	●
Platform console machine status light ¹	●	●
AC power cable to platform	●	●
12 mm air line to platform	○	○
Welding leads to platform	○	○
Power & Transmission		
Deutz F3M1011F diesel engine 34kW @ 3000rpm	●	●
Engine distress warning system	●	●
Spark arresting muffler	●	●
3 speed drive select	●	●
Automatic transmission	●	●
Four wheel drive	●	●
Four wheel steer	–	–
Functional Equipment & Accessories		
3 & 5 degree tilt alarm and indicator light	●	●
33/1550 x 16.5 foam filled loader lug tread tyres	●	●
12 x 16.5 foam filled loader lug tread tyres	○	○
Oscillating front axle	●	●
Hydraulic levelling jacks (5 degrees side-to-side, 4 degrees angle front to rear)	○	○
Lifting/tie down lugs	●	●
On-board 2500W generator	○	○
Hour meter	●	●
Ground control selector switch with key lock	●	●
Noise reduction package	●	●
Lubrication free scissor arm bushings	●	●
Scissor maintenance prop	●	●
Tow package	○	○
Horn	●	●
Travel alarm	○	○
Descent alarm	○	○
All motion alarm	○	○
Platform work lights	○	○
Hydraulic oil cooler	○	○
Nite-Bright™ accessory package (consists of six 40 watt lights)	○	○
Flashing amber beacon	○	○
Catalytic Purifier Muffler	○	○
Cylinder bellows	○	○
12V-DC auxiliary power	●	●

¹ Provides indicator lights at platform control console for system distress, fuel, 3 degree tilt light, and optional levelling jacks.

● Standard ○ Option – Not Available

