

# Model 13MSPT

## MOBILE STOCK PICKER




JLG®

PRELIMINARY SPECIFICATIONS

### Features

- Stock Picking Platform with Hydraulically Powered Material Tray Reaches Over 15 feet
- Load Securing Material Strap
- Rigid Aluminum Mast
- Dual Side Entry Swing Up Gates
- Lifting Eye for a Crane Hook
- Charger Cord Reel
- Two-handed Drive and Steer
- Brushless AC Motors
- Four 6-Volt 180 Amp-hr Maintenance-Free Gel Cell Batteries
- Battery Discharge Indicator
- Non-Marking Tires
- Transportation Tie Downs
- Lifting Eye for Crane Hook
- Lanyard Attachment Anchor
- Hourmeter
- All Motion Alarm
- Flashing Amber Beacon
- Horn

**Versatile platform with hydraulic powered material tray**

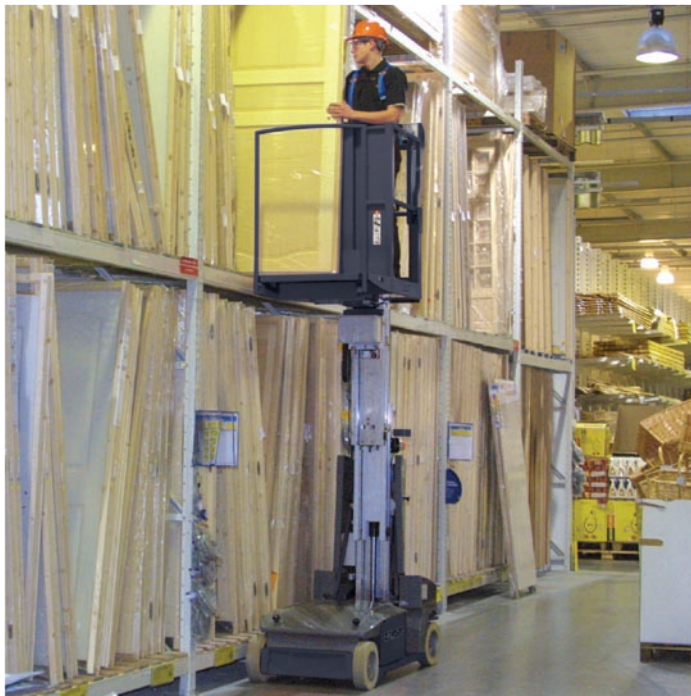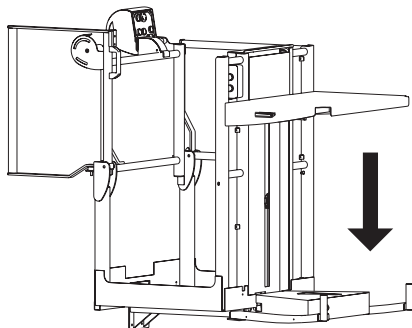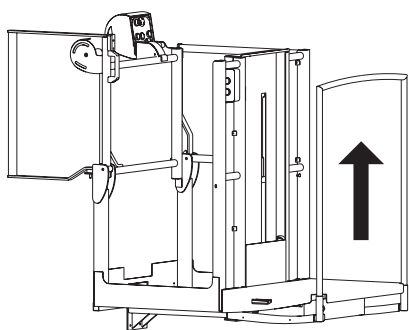

### Improved stock picking productivity

- Exclusive hydraulic powered material tray raises and lowers to accommodate a wider variety of items
- Easier for a single person to load and carry large or bulky materials up to 150 pounds

### More durable and efficient design

- Heavy-duty brushless AC motors for continuous use and higher reliability
- Rigid aluminum mast for solid support
- Simplified hydraulics – one hose

### Compact and maneuverable in tight spaces

- Small 31 in. x 65 in. chassis
- Zero turning radius
- Driveable at full platform height (13 ft)

# Model 13MSPT

## MOBILE STOCK PICKER

### Specifications

#### Dimensions:

|                        |                        |
|------------------------|------------------------|
| Platform Height        | 13 ft 1.5 in. (4.0 m)  |
| Working Height         | 19 ft 1.5 in. (5.83 m) |
| Drive Height           | Max. Platform Height   |
| Stowed Height          | 70.5 in. (1.79 m)      |
| Platform Entry Height  | 21.25 in. (54 cm)      |
| Overall Vehicle Length | 65 in. (1.65 m)        |
| Overall Vehicle Width  | 30.7 in. (78 cm)       |
| Gross Vehicle Weight   | 2,205 lb (1,000 kg)    |

#### Platform Capacity:

|                   |                 |
|-------------------|-----------------|
| Overall Capacity  | 500 lb (227 kg) |
| Operator Platform | 350 lb (159 kg) |
| Material Tray     | 150 lb (70 kg)  |

#### Platform Size (W x L):

|                   |                                 |
|-------------------|---------------------------------|
| Operator Platform | 25.6 x 29.5 in.<br>(65 x 75 cm) |
| Material Tray     | 19.5 x 29.5 in.<br>(50 x 75 cm) |

#### Drive Maximum Speed:

|                   |                    |
|-------------------|--------------------|
| Platform Lowered  | 2.5 mph (4.0 kmph) |
| Platform Elevated | 0.6 mph (1 kmph)   |
| Turning Radius    | 0                  |
| Gradeability      | 20%                |

#### Wheel Diameter & Width:



|               |                          |
|---------------|--------------------------|
| Front & Rear  | 12 x 3 in. (30 x 8 cm)   |
| Tire Material | Non-Marking Solid Rubber |

#### Batteries:

|                                                            |                  |
|------------------------------------------------------------|------------------|
| Four 6-Volt 180 amp-hr Maintenance-Free Gel Cell Batteries |                  |
| Battery Charger                                            | 15 Amp Automatic |

#### Drive System:

Direct Electric Drive with Brushless AC Motors

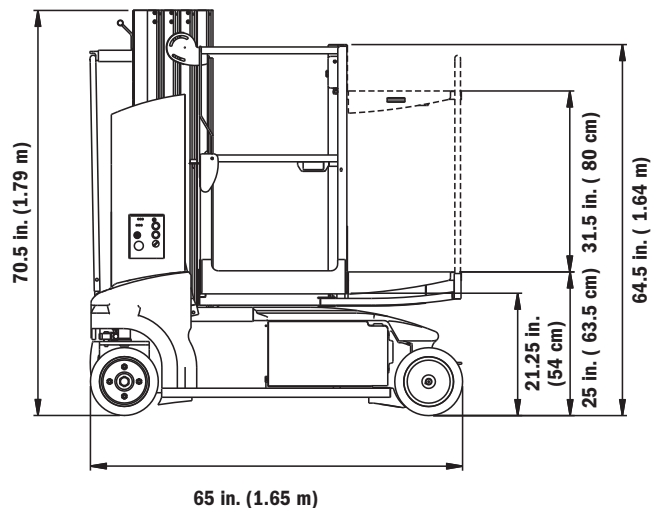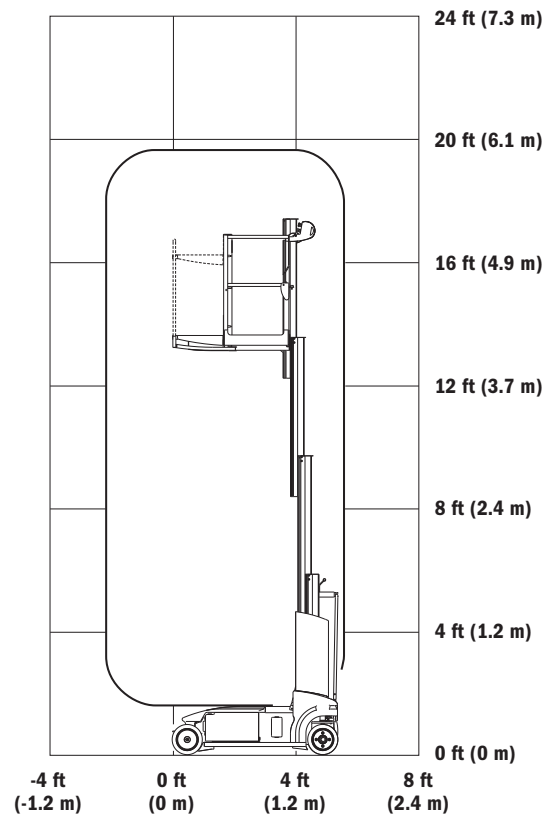

#### The JLG "1 & 5" Warranty for Model 13MSPT

JLG Industries, Inc. backs our 13MSPT with our exclusive "1 & 5" Warranty. We provide coverage for one (1) full year, and cover all specified major structural components for five (5) years. These machines meet or exceed applicable OSHA Regulations in 29 CFR 1910.67, 29 CFR 1926.453, ANSI A92.6-1999 and CSA standard CAN/CSA B354.2-01 as originally manufactured for intended applications. We reserve the right to make price, specification, and/or equipment changes without prior notification.

Form No.: SS-13MSPT-0306  
Part No.: 3132130  
Printed in USA



#### JLG Industries, Inc.

1 JLG Drive  
McConnellsburg, PA 17233-9533  
Telephone 717-485-5161  
Toll-free in US 877-JLG-LIFT  
Fax 717-485-6417  
www.jlg.com