

FSA Cooperative Purchasing Program



**FSA23-EQU21.0: Equipment
Pre-Bid Meeting: July 13, 2023**



Protecting, Leading & Uniting...since 1893

FLORIDA SHERIFFS ASSOCIATION

2617 Mahan Drive, Tallahassee, Florida 32308
P.O. Box 12519 • Tallahassee, Florida 32317-2519

p: (850) 877-2165
f: (850) 878-8665
www.flsheriffs.org  

Florida Sheriffs Association Cooperative Purchasing Program

CPP@FISheriffs.org

INVITATION TO BID ADVERTISEMENT: FSA23-EQU21.0

The Florida Sheriffs Association invites interested bidders, including manufacturers, to submit responses in accordance with these solicitation documents. The Florida Sheriffs Association will serve as the Contract Administrator in the solicitation process and the administration of the resulting contract. The purpose of this bid is to establish a twenty-four (24) month contract, beginning October 1, 2023 and ending September 30, 2025, for statewide purchasing of construction, material handling, transportation, and grounds care equipment.

Refer to the Bid Calendar for major bid tasks, activities, and dates. **All prospective bidders are required to attend the Pre-Bid Meeting. Bookmark the FSA website to stay up to date on the latest bid announcements.**

FSA23-EQU21.0	
Bid Calendar Task	Date
Invitation to Bid Announcement (ITB)	5/1/2023 & 5/15/2023
Voluntary Interested Bidder Workshop	6/7/23 - 6/8/23
New Item Specification Requests Due	6/23/2023
Pre Bid Meeting	7/13/2023
Request for Clarifications Due to FSA	7/18/2023
FSA VendorLink Bidder Training	7/24/2023
Bid System Open	7/25/2023
Cone of Silence	7/25/2023 - 9/11/2023
Bid Submissions Due	8/30/2023
Public Bid Opening	9/1/2023
Bid Tabulations Posted	9/1/2023
Bid Evaluation	9/5/2023 - 9/8/2023
Intent To Award	9/11/2023
Final Award & Effective Date of New Contract	10/1/2023

Bid Submittals will be received via the bid system by August 30, 2023.

This contract shall be awarded to the lowest responsive bidder by item bid. Multiple awards may be given. Bidder warrants, by virtue of bidding, it is submitting a firm bid and the prices quoted in their bid response will be good for an evaluation period of sixty (60) calendar days from the date of bid opening unless otherwise agreed to by the FSA.

Bidders are hereby advised that the Florida Sheriffs Association reserves the right to reject any and all bids, or separate portions thereof, and to waive any irregularity, technicality or omission if the FSA determines that doing so will serve in the FSA's best interest. The FSA may also reject any bid not submitted in the manner specified by the solicitation documents.



EQUIPMENT CONTRACT PRE-BID MEETING AGENDA

JULY 13, 2023

9:00AM – 4:00PM

LUNCH 12:00PM – 1:15PM

1. Introductions
 - a. Staff
 - b. Committee
 2. Bid Calendar
 3. Steps of The Bid Process Overview
 - a. VendorLink Registration (free)
 - b. VendorLink Training-July 24th
 4. Bid Submittal
 - a. Complete Qualifications Packet
 - b. Price per item, per zone
 - c. Build sheet
 - d. Option sheet
 5. FSA Terms & Conditions (T&C)
 - a. Terms and Conditions Overview
 - i. Section 1: General Conditions
 - ii. Section 2: Bidder Instructions
 - iii. Section 3: Contract Conditions
 - b. Significant changes
 - i. Dealer cost
 6. Item Specifications
 - a. Overview
 - b. Item specifications changes
 - c. New item groups
 - i. New item group specifications
 7. Questions and Discussion
-



Florida Sheriffs Association Cooperative Purchasing Program Successful Bid Checklist

- ☐ Identify which contract you intend to bid.

- ☐ Attend the mandatory pre-bid meeting.

- ☐ Register with the [CPP bid system \(VendorLink\)](#). Registration for an organization is tied to a single user email address. If multiple staff will be using the bid system for a single bidder, they must share a log-in.

- ☐ Log into the bid system when it opens.

- ☐ Download required bid materials from the bid system. Bidders should use only the documents provided in the bid system (VendorLink) to complete their bid submission.

- ☐ Complete and sign the Bidder Qualification Packet.

- ☐ Upload Bidder Qualification Packet into the bid system.

- ☐ Submit pricing, build sheets, and the qualifications packet before the bid system closes. All required information must be submitted using the bid system. Bids are not complete until they have been marked as “submitted” status in the bid system.

- ☐ Submit Certificate of Insurance to CPP@Flsheriffs.org (if awarded).

*If you are having issues with the bid system (VendorLink) or accessing the bid, please contact technical assistance at support@evendorlink.com indicating which bid you need assistance with, your name, email address, business name, and the problem in need of assistance.

FSA Cooperative Purchasing Program



Qualification Packet

DRAFT



DRAFT

QUALIFICATIONS FORM

Each bidder shall submit the bidder's qualifications form. FSA reserves the right to request documentation confirming the provided information.

FSA Contract Number

Contact Information

Bidder Company Name

Parent Company, if applicable

Business Address

The individuals below will be the point of contacts for FSA during the bid process. If awarded the bidder will need to complete an online contact form to provide FSA staff with the appropriate contacts for servicing this contract.

Primary Contact (Authorized Agent)

Name

Title

Phone number

Email

Secondary Contact

Name

Title

Phone number

Email

Business Profile

Federal Employer Identification Number (FEIN)

State of Incorporation

Length of Time in Business (Years)

Check: ☐ Manufacturer
☐ Dealer

If dealer, are you an authorized/certified dealer for the manufacturer of the products that you will be bidding on? ☐ Yes ☐ No

Select the applicable boxes

- ☐ Individual
- ☐ Partnership
- ☐ Corporation
- ☐ LLC

FSA Contract Number
Bidder Company Name



DRAFT

Does the bidder meet the requirements for any of the following designations?

- ☐ Minority Business Enterprise (MBE)
- ☐ Disadvantaged Business Enterprise (DBE)
- ☐ Women Business Enterprise (WBE)
- ☐ Small businesses Enterprise (SBE)

References

Provide three references from contracts of comparable size and scope. If bidder does not have experience of comparable size and scope, business references may be provided.

☐ *Select if bidder is currently an FSA awarded vendor. References not required for current vendors.*

Contracting Entity

Term of Contract

Is this a government fleet sales contract

☐ Yes ☐ No

Select type of reference (select all that apply)

Contracting Entity

Term of Contract

Is this a government fleet sales contract

☐ Yes ☐ No

Select type of reference (select all that apply)

Contracting Entity

Term of Contract

Is this a government fleet sales contract

☐ Yes ☐ No

Select type of reference (select all that apply)

Disqualifications & Defaults

List the contracts the bidder has been disqualified, terminated, or found in default on within the last five (5) years. Explanations must be provided.

Contracting Entity

Date of occurrence

Is this a government fleet sales contract

☐ Yes ☐ No

The bidder was (select all that apply)

Explanation of disqualification, termination, and default.



DRAFT

Contracting Entity

Date of occurrence

Is this a government fleet sales contract

☐ Yes

☐ No

The bidder was (select all that apply)

Explanation of disqualification, termination, and default.

Contracting Entity

Date of occurrence

Is this a government fleet sales contract

☐ Yes

☐ No

The bidder was (select all that apply)

Explanation of disqualification, termination, and default.

Warranty Service Plan

The bidder attests that:

☐ The organization maintains a repair facility within the State of Florida to provide warranty service.

☐ The organization does NOT maintain a repair facility within the State of Florida.

If not: Does your organization have a Warranty Service Plan to service Florida purchasers if awarded the contract?

☐ Yes

☐ No



DRAFT

Emergency Vehicle Technician (EVT) Certification

Bidders that will provide or contract to provide emergency light and siren installation must only use installers that possess a current Emergency Vehicle Technician Certification. FSA may request certificates for a vendor's installers at any time during the contract term. For vehicles that are manufactured with emergency lights and sirens, including motorcycles, bidders may not charge for labor.

☐ The bidder attests that emergency light and siren installations are only done by installers that possess a current Emergency Vehicle Technician Certification.



DRAFT

FLORIDA COMPLIANCE

The following items are required and governed by Florida statute.

E-Verify

Per [Florida Statute 448.095](#) public employers, bidders, and sub-vendors must register with and use the E-Verify system operated by the U.S. Department of Homeland Security to verify the work authorization of all newly hired employees.

As the representative for
, I hereby attest that (please choose one):

- ☐ Yes, our organization meets the Florida requirements for E-Verify.
☐ No, our organization does not meet the Florida requirements for E-Verify.

Workers Compensation

Per [Florida Statute Chapter 440](#), employers must provide workers' compensation insurance for their employees.

As the representative for
, I hereby attest that (please choose one):

- ☐ Yes, our organization meets the Florida requirements for Workers Compensation.
☐ No, our organization does not meet the Florida requirements for Workers Compensation.

Drug-Free Workplace

The bidder attests that they operate in accordance with [Florida Statute 287.087](#) (Drug-Free Workplace), to make a good faith effort to maintain a drug-free workplace through implementation of best practices identified below.

- Publish and provide a statement notifying employees that the unlawful manufacture, distribution, dispensing, possession, or use of a controlled substance is prohibited in the workplace and specifying the actions that will be taken against employees for violations of such prohibition.
- Inform employees about the dangers of drug abuse in the workplace, the business's policy of maintaining a drug-free workplace, drug counseling, rehabilitation, and employee assistance programs, and the penalties that may be imposed upon employees for drug abuse violations.
- Notify employees, that as a condition of working on the FSA contract, the employee will abide by the terms of the statement and will notify the employer of any conviction of, or plea of guilty or nolo contendere to, any violation of Chapter 893 or of any controlled substance law of the United States or any state, for a violation occurring in the workplace no later than five (5) days after such conviction.



DRAFT

As the representative for
I hereby attest that (please choose one):

- ☐ Yes, our organization meets the requirements of a drug-free workplace.
- ☐ No, our organization does not meet the requirements of a drug-free workplace.

Motor Vehicle Dealer License

To sell or distribute motor vehicles in the state of Florida bidders must possess the appropriate Motor Vehicle Dealer and Brokers license as outlined by the [Florida Department of Highway Safety & Motor Vehicles](#).

- ☐ The bidder possesses the appropriate Motor Vehicles Dealer license.
- ☐ The bidder does not possess the appropriate Motor Vehicles Dealer license.



DRAFT

FEDERAL COMPLIANCE

Bidders willing to accept purchase orders that are funded in whole or in part with federal funding (e.g., federal grants or cooperative agreements), have the option to agree to comply with applicable federal regulations. This is encouraged; however, not a requirement of the bid.

As the representative for,
I certify that my organization (please choose one):

☐ is willing to comply with the requirements applicable to federally funded purchase orders set forth in the FSA CPP Terms & Conditions Appendix C

☐ is not willing to comply with the requirements applicable to federally funded purchase orders set forth in the FSA CPP Terms & Conditions Appendix C. *I understand that this means purchasers will not be able to order my products using federal funds.*

Bidder Company Name

Name of Authorized Agent

Business Address

Signature

Date

Debarment and Suspension

**Required for bidders opting-in for federal compliance*

This contract is a covered transaction for purposes of 2 CFR Part 180. As such, the bidder is required to verify that none of the bidder's principals (defined at 2 CFR § 180.995) or its affiliates (defined at 2 CFR § 180.905) are excluded (defined at 2 CFR § 180.940) or disqualified (defined at 2 CFR § 180.935) or listed on the governmentwide exclusions in the System for Award Management ("SAM"). SAM Exclusions contain the names of parties debarred, suspended, or otherwise excluded by agencies, as well as parties declared ineligible under statutory or regulatory authority other than Executive Order 12549.

The bidder must comply with 2 CFR Part 180 and must include a requirement to comply with these regulations in any lower tier covered transaction it enters into. This certification is a material representation of fact relied upon by the Florida Sheriffs Association. If it is later determined that the bidder did not comply with 2 CFR Part 180 in addition to remedies available to the Florida Sheriffs Association, the Federal Government may pursue available remedies, including but not limited to suspension and/or debarment.

The bidder agrees to comply with the requirements of 2 CFR Part 180 while this offer is valid and throughout the period of any contract that may arise from this offer. The bidder or proposer further agrees to include a provision requiring such compliance in its lower tier covered transactions.



DRAFT

☐ The bidder hereby attests that it is not identified in the Exclusions area of SAM as being currently debarred, suspended, proposed for debarment or otherwise excluded and the bidder will comply with the requirements of 2 CFR Part 180.

Bidder Company Name

Name of Authorized Agent

Signature

Lobbying Certification for Contracts, Grants, Loans and Cooperative Agreements

**Required for bidders opting-in for federal compliance*

No federal appropriated funds have been paid or will be paid, by or on behalf of the bidder, to any person for influencing or attempting to influence an officer or employee of an agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with the awarding of any Federal contract, the making of any Federal grant, the making of any Federal loan, the entering into of any cooperative agreement, and the extension, continuation, renewal, amendment, or modification of any Federal contract, grant, loan, or cooperative agreement.

If any funds other than Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with this Federal contract, grant, loan, or cooperative agreement, the bidder shall complete and submit Standard Form- LLL, "Disclosure Form to Report Lobbying," in accordance with its instructions.

The bidder shall require that the language of this attestation be included in the award documents for all subawards at all tiers (including subcontracts, subgrants, and contracts under grants, loans, and cooperative agreements) and that all subrecipients shall certify and disclose accordingly.

This attestation is a material representation of fact upon which reliance was placed when this transaction was made or entered into. Submission of this certification is a prerequisite for making or entering into this transaction imposed by 31, U.S.C. § 1352 (as amended by the Lobbying Disclosure Act of 1995). Any person who fails to file the required certification shall be subject to a civil penalty of not less than \$10,000 and not more than \$100,000 for each such failure.



DRAFT

The bidder attests the truthfulness and accuracy of each statement of its certification and disclosure, if any. In addition, the bidder understands and agrees that the provisions of 31 U.S.C. § 3801 et seq., apply to this certification and disclosure, if any.

☐ The bidder hereby attests that it has not used and will not use Federal appropriated funds to pay any person or organization for influencing or attempting to influence an officer or employee of any agency, a member of Congress, officer or employee of Congress, or an employee of a member of Congress in connection with obtaining any Federal contract, grant or other award covered by 31 U.S.C. § 1352 and the bidder understands and agrees to comply with the provisions of 31 U.S.C. § 3801 et seq.

Bidder Company Name

Name of Authorized Agent

Signature



DRAFT

CONTRACT SIGNATURE FORM

By submitting a response to this Invitation to Bid and signing this form, the bidder declares that he or she has read, and the company understands, accepts and will comply with the terms, conditions and specifications of this bid and any addenda issued. The failure or omission to review this document shall in no way relieve the authorized agent of obligations with respect to this bid. The submission of a bid and signature below shall be taken as evidence of acceptance of the terms and conditions of this bid.

The bidder further declares that no other persons other than the authorized agent herein named has any interest in this bid or in the contract to be taken, and that it is made without any connection with any other person or persons making proposal for the same article, and is in all respects fair and without collusion or fraud.

The bidder further declares that they have carefully examined the specifications and is thoroughly familiar with its provisions and with the quality, type and grade of materials required.

The bidder further declares that they have provided a discount on all factory options included in this bid, and such discount will be included in all purchase orders.

The bidder further declares that the company understands the financial responsibility associated with this bid as stated and further declares that it has the ability to meet the financial responsibility associated with this bid.

The bidder further declares that the company will furnish the items awarded for the price bid.

FSA Contract Number

Bidder Company Name

Business Address

Name of Authorized Agent

Email address of authorized agent

Signature

Date



Insurance Checklist

DRAFT

The Insurance Checklist outlines the bidder's insurance coverage obligations, if awarded. Complete insurance requirements are in the terms and conditions.

1. Comprehensive General Liability
 - Minimum limits of \$1,000,000 per occurrence to include:
 - Bodily Injury
 - Property Damage
 - Contractual Liability
 - Completed Products/Operations
 - General Aggregate
 - Minimum limit of \$3,000,000
 - Product Liability
 - Minimum limit of \$5,000,000 required for all bidders providing ambulance remount services
2. Automobile Liability
 - Minimum limit of \$1,000,000 per occurrence to include:
 - Owned, non-owned, hired, scheduled automobiles
 - Applicable if items are transported or delivered to purchasers by the bidder
3. Garage Insurance
 - Minimum limit of \$1,000,000
 - Required for all vendors providing ambulance remount services
 - Applicable when the garage is used to complete work for this contract
 - If bidder does not have garage insurance, a reason must be provided on company letterhead
4. The Florida Sheriffs Association (FSA) must be listed as an Additional Insured
5. The certificate must include the FSA bid number and bid title.

Bidder understands the insurance requirements of the contract terms and conditions, and that if awarded evidence of insurance is required five (5) business days prior to the contract award date.

FSA Contract Number: Click or tap here to enter text.

Bidder:

Signature:

Date: Click or tap here to enter text.



FSA23-EQU21.0: Equipment Item Group Specifications



FSA23-EQU21.0: Heavy Equipment Item Group Specifications

Item Groups Summary

All bid items shall be built to FSA base specifications for the item or model number indicated and shall include all standard manufacturer equipment unless otherwise specified. When requested by the purchaser, vendors must submit detailed specifications for the item and options offered.

- All Terrain & Utility Vehicles: All Terrain Vehicles (Quad)
- All Terrain & Utility Vehicles: Utility Vehicles (Side-by-Side)
- All Terrain & Utility Vehicles: Electric Utility Vehicles (Side-by-Side)
- Boat: Aquatic Weed Cutter Workboat
- Bulldozer: 180hp
- Bulldozer: 70hp
- Bulldozer: 90hp
- Chipper: Brush Chipper
- Compactor: 80,000 lbs. Landfill Compactor
- Compressor: Air Compressor - Trailer Mounted
- Dump Truck: Articulating Off Road Dump Truck - 50,000 lbs. Payload
- Excavator: All Terrain Walking Excavator
- Excavator: Hydraulic Excavator - 15,590 lbs. Operating Weight
- Excavator: Hydraulic Excavator - 38,000 lbs. Operating Weight
- Excavator: Hydraulic Excavator - 76,550 lbs. Operating Weight
- Excavator: Mini Hydraulic Excavator - 7,105 lbs. Operating Weight
- Excavator: Telescopic Excavator - 45,000 lbs. Operating Weight - Tracked Type
- Excavator: Telescopic Excavator - 47,000 lbs. Operating Weight - 6x6 Wheeled Type
- Excavator: Vacuum Excavator - Trailer Mounted
- Excavator: Wheeled Hydraulic Excavator - 42,000 lbs. Operating Weight
- Forklift: Cushion Tire - 4,000 lbs. Capacity
- Forklift: Rough Terrain Forklift - 5,000 lbs. Operating Weight*
- Forklift: Telescopic Tool Carrier/Telehandler
- Generator: 60kW Stationary*
- Generator: 125kW Stationary
- Generator: 150kW Mobile
- Generator: 500kW Mobile
- Generator: 500kW Stationary
- Horizontal Directional Drill*
- Leaf Collector: Trailer Mounted*
- Lift: Scissor Lift - Self Propelled
- Light Tower: Hybrid Light Tower
- Light Tower: Light Tower - Trailer Mounted



FSA23-EQU21.0: Heavy Equipment Item Group Specifications

- Loader: Loader Backhoe - 4x4
- Loader: Skid Steer - 1,850 lbs. Operating Capacity - Wheeled Type
- Loader: Skid Steer - 2,800 lbs. Operating Capacity - Wheeled Type
- Loader: Skid Steer - 3,100 lbs. Operating Capacity - Tracked Type
- Loader: Wheel Loader - 1.5 cubic yd.
- Loader: Wheel Loader - 3.0 cubic yd.
- Loader: Wheel Loader - 5.75 cubic yd.
- Low Speed Vehicle: Electric Type
- Motor Grader: Large
- Motor Grader: Small
- Mower: 15ft. Flex Wing Rotary Mower
- Mower: Remote Controlled Brush Mower
- Mower: Electric Zero Turn Radius Mower*
- Mower: Zero Turn Radius Mower
- Pallet Jack: Electric 4,400 lbs. Capacity*
- Pipe Inspection: Battery Operated Pipe Crawler Inspection System*
- Pump: Mobile Pump
- Roadway Advisory Board: Mobile Message Board
- Roadway Advisory Board: Mobile Speed Board
- Roadway Advisory Board: Mobile Speed Board/Automatic License Plate Reader*
- Roadway Advisory Board: Mobile Traffic Advisory/Direction Signal Board
- Roller: Compaction Roller 30,000 lbs. - Single Drum
- Roller: Large 22,000 lbs. - Double Drum Roller - 70in. Width
- Roller: Small 5,400 lbs. - Double Drum Roller - 47in. Width
- Sewer Cleaner: Combination Sewer Cleaning/Vacuum Machine Body - 10 cubic yd.
- Sewer Cleaner: Trailer Mounted Sewer Cleaner
- Shop Tools & Equipment*
- Shredder: Mobile Shredder
- Solid Waste Material Handler: Wheeled Type
- Stump Cutter
- Sweeper: 3-Wheel Mechanical or Regenerative Air Sweeper
- Sweeper: Cabover Mechanical Broom Street Sweeper
- Sweeper: Compact Air Sweeper - 2.3 cubic yd.
- Sweeper: Regenerative Air Street Sweeper
- Sweeper: Self-Propelled Hydrostatic Broom
- Tactical Vehicle: Skid Steer Mounted (The Rook)
- Tool Carrier: Hydrostatic Drive
- Tractor: Agriculture Tractor - 4x2



FSA23-EQU21.0: Heavy Equipment Item Group Specifications

- Tractor: Compact Articulating Tractor - AWD
- Tractor: Small Agriculture Tractor - 4x4
- Tractor: Tractor with Boom Mower - 4x4
- Trailer: Deck Over Flatbed Trailer - 16,000 lbs. GVWR
- Trailer: Deck Over Equipment Trailer - 40,000 lbs. GVWR*
- Trailer: Detachable Neck Lowboy Trailer - 100,000 lbs. GVWR*
- Trailer: Enclosed Cargo Trailer - 7,000 lbs. GVWR
- Trailer: Enclosed Utility Body/Trailer Mounted - 9,990 lbs. GVWR*
- Trailer: Fixed Neck Lowboy Trailer - 70,000 lbs. GVWR*
- Trailer: Hydraulic Drop Deck Trailer - 13,500 lbs. GVWR*
- Trailer: Hydraulic Tail Trailer - 70,000 lbs. GVWR
- Trailer: Leachate Tanker - 6,500 gallons*
- Trailer: Livestock Trailer - 7,000 lbs. GVWR*
- Trailer: Pull Behind Dump Trailer - 14,000 lbs. GVWR
- Trailer: Refrigeration/Freezer Trailer - 7,000 lbs. GVWR*
- Trailer: Utility/Equipment Trailer - 7,000 lbs. GVWR*
- Trailer: Waste Trailer with Walking Floor
- Transfer Switch: 600 Amp Automatic Transfer Switch
- Trencher: Walk Behind Trencher
- Underground Locating Equipment: Ground Penetrating Radar*
- Underground Locating Equipment: Utility Locator*
- Vehicle Lift: Mobile - 2 Column, Cabled
- Vehicle Lift: Mobile - 2 Column, Wireless
- Vehicle Lift: Mobile - 4 Column, Cabled
- Vehicle Lift: Mobile - 4 Column, Wireless
- Vehicle Lift: Mobile - 6 Column, Cabled
- Vehicle Lift: Mobile - 6 Column, Wireless
- Vehicle Lift: Mobile - 8 Column, Cabled
- Vehicle Lift: Mobile - 8 Column, Wireless
- Vehicle Lift: Stationary - 2 Post Asymmetric Stationary Vehicle Lift 10k
- Vehicle Lift: Stationary - 2 Post Symmetric Stationary Vehicle Lift 12k
- Vehicle Lift: Stationary - 2 Post Symmetric Stationary Vehicle Lift 15k
- Vehicle Lift: Stationary - 2 Post Symmetric Stationary Vehicle Lift 18k
- Vehicle Lift: Stationary - 2 Post Versymmetric Stationary Vehicle Lift 10k
- Vehicle Lift: Stationary - 4 Column, Alignment Lift with Front/Rear Jacks and Integrated Turntables and Slip Plates 14k



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

**Indicates new item group for FSA23-EQU21.0*

DRAFT



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

All Terrain & Utility Vehicles: All Terrain Vehicles (Quad)

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Engine: Manufacturer's gas or diesel engine, air cooled, overhead valve, keyed electronic ignition, 20 hp minimum
- Transmission: Manufacturer's standard automatic transmission
- Chassis: Standard front bumper
- Tires and Wheels: Front and rear all terrain tires, must match drive train



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

All Terrain & Utility Vehicles: Utility Vehicles (Side-by-Side)

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following

FSA Base Specification

- Engine: Manufacturer's gas or diesel engine, air cooled, overhead valve, keyed electronic ignition, 20 hp minimum
- Transmission: Manufacturer's standard automatic transmission
- Chassis: Standard front bumper
- Tires and Wheels: Front and rear all terrain tires, must match drive train

DRAFT



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

All Terrain & Utility Vehicles: Electric Utility Vehicles (Side-by-Side)

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- FSA Base Vehicle Requirements: 2 programmed keys and fobs if available, full-size spare tire if available
- Dimensions (Approximate): Length- 115", height- 51", width- 56", wheel base- 79", curb weight- 1,500 lbs., GVW- 2,900 lbs.
- Power: 7 hp electric motor, 8-6 volt heavy duty batteries, 48 volt
- Transmission/Axle: Enclosed internally lubricated differential/transaxle, 2-wheel drive
- Chassis/Steering/Suspension: 1,250 lbs. towing capacity, 2,900 lbs. GVW, frame type chassis, suspension matched for GVW of vehicle
- Tires And Wheels: Off/on road type tires, wheels rated for GVW of vehicle, tires to be traction type rated for GVW of vehicle
- Performance: 45 mile range, 19 mph minimum
- Brakes: Manual parking brake, disc or drum type, 2 or 4 wheel breaks
- Body: Rear mounted hitch for towing 2", pick-up type box with sides and tailgate, 2 passenger seating



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Boat: Aquatic Weed Cutter Workboat

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- General Dimensions: Height- 8', width- 7'3", length- 15', height from waterline- 48", boat draft- 4" to 6", weight- 2,285 lbs.
- Engine: 3-cylinder diesel engine, liquid cooled electric start, and charging system
- Hydraulics: Triple pump design, 27 gpm, eco-friendly hydraulic fluid
- Propulsion: Twin hydraulic outdrives, weed and mud design propellers
- Vessel Hull: Fiberglass/kevlar design, deck mounted cutter and loader
- Boom Cutter: Hydraulic drive, full articulation to cut 5' below waterline
- Front End Loader: Marine-type vegetation bucket
- Operator Station: All hydraulic function/propulsion function controls
- Trailer: Trailer to be designed specifically for this workboat. Must meet all federal, state, and local laws for a trailer operated on the highway.



FSA23-EQU21.0: Heavy Equipment Item Group Specifications

Bulldozer: 180hp

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Engine: Minimum 6-cylinder 180 hp diesel engine
- Transmission: Power shift (3 forward, 1 reverse minimum) or hydrostatic drive (variable)
- Undercarriage: 7 rollers each side minimum, top roller each side minimum, manufacturer's standard length track, manufacturer's standard track width, 24" grouser width
- Dozer Blade: Width- 128", height- 48", 2.5 cubic yd. blade capacity, PAT type blade, power angle and tilt, hydraulically controlled
- Weight: Minimum operating weight- 43,000 lbs.



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Bulldozer: 70hp

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Engine: Minimum 4-cylinder 70 net hp
- Transmission: Hydrostatic, infinitely variable speed, constantly variable
- Undercarriage: Minimum 5 rollers, standard grouser minimum of 16", top roller each side
- Dozer: Minimum width- 96", minimum height- 32", minimum 1.88 cubic yd. blade capacity, power angle tilt (PAT) type blade



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Bulldozer: 90hp

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Engine: Minimum 4-cylinder 90 net hp
- Transmission: Hydrostatic, infinitely variable speed, constantly variable
- Undercarriage: Minimum 6 rollers, standard grouser minimum of 18", top roller each side
- Dozer: Minimum width- 104", minimum height- 36", minimum 2.5 cubic yd. blade capacity, power angle tilt (PAT) type blade



FSA23-EQU21.0: Heavy Equipment Item Group Specifications

Chipper: Brush Chipper

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Dimensions: Weight- 6,800 lbs., width- 72", height- 100"; length- 176", 15" chipping capacity
- Engine: 122 hp diesel engine, over center type clutch, heavy duty air cleaner, spin on type filters
- Chassis: Main frame constructed of rectangular tubing or in.zin. section, 7,000 lbs. axle torsion type, electric brakes with breakaway switch, ST 235/80R16 tires load range E, steel wheels, drop leg jack, 2 1/2" diameter lunette or 2 5/16" ball hitch, adjustable height hitch, safety chains, 6-way light connector, all wiring in conduit to lights, four function rear lights
- Feed System: Infeed throat opening- 20" x 15", serrated infeed rollers, feed rollers hydraulically driven, feed table height- 27", feed table length- 30", safety control bar around infeed opening for emergency stop
- Chipper Drum Or Disc: Drum type- 22" diameter x 22" width, 2 knife pockets 180 degrees apart, dual edge reversible knives, extreme duty bearings, adjustable bedknife (reversible), disc type: 37" x 2" diameter disc, 4 knives reversible
- Chipper Housing: Easy access door for knife changes, drop down door for anvil adjustment or clean out, chipper housing to be constructed for maximum safety and operator protection
- Discharge Chute: Rotation of 360 degrees, adjustable chip deflector locking pin for chute rotation
- Miscellaneous: 26 gal fuel tank, engine shutdown system, locking tool box, vandalism protection



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Compactor: 80,000 lbs. Landfill Compactor

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Weight: Minimum operating weight- 80,000 lbs.
- Engine: Turbocharged diesel engine 400 hp minimum, spin on type filters
- Transmission/Hydraulic System: Mechanical or hydrostatic drive will be acceptable (2 speeds forward and 2 speeds reverse minimum), spin on type hydraulic filters
- Operating Station: Enclosed sound suppressed cab, air filtration system, air conditioned, heater and defroster, gauges and engine monitoring shutdown system, adjustable suspension seat, outside mirrors, work lights, windshield wipers and washer
- Electrical System: 24 Volt
- Wheels: Compaction wheels- 48" width minimum, wheel diameter- 58" width minimum, chevron chopper blades, weld-on or pin-on teeth type wheels acceptable, anti-wire wrapping device if applicable, cleaner bar if applicable
- Blade: Straight or U type trash blade acceptable, 14' blade minimum, 6' blade height minimum, full width trash screen on top of blade, bolt on cutting edges
- Miscellaneous: Fully shielded engine compartment, removable belly pan, landfill shielding package if applicable



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Compressor: Air Compressor - Trailer Mounted

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Approximate Dimensions: Weight- 1,950 lbs., length- 79", width- 40", height- 47"
- Engine: 49 hp Tier 4 Engine, 12 Volt electrical system, engine protection system, gauge package
- Compressor: 185 cfm @ 100 psi, rotary or reciprocating style compressor, 2 service valves
- Trailer: 3,700 GVW axle rating, manufacturer rated tires, fold up tongue jack
- Enclosure: Fixed weather enclosure over entire engine/compressor, 2 full size tool boxes



FSA23-EQU21.0: Heavy Equipment Item Group Specifications

Dump Truck: Articulating Off Road Dump Truck - 50,000 lbs. Payload

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Weight: Minimum operating weight- 40,000 lbs., minimum gross weight (with payload)- 91,000 lbs.
- Engine: Turbocharged diesel engine 265 hp, 549 cubic in. minimum, spin on type filters, two stage air cleaner
- Transmission: 6 speeds forward, 1 speed reverse, top speed of 31 mph, hydraulic retarder
- Brakes: Disc type service brakes, disc type parking brake
- Axles & Differentials: Differential locks, planetary gear reduction final drives, inter axle differential lock
- Tires: Tubeless, radial off road hauler tires, 23.5 R 25 tire size
- Steering: 45 degree left or right articulation angle, secondary electric steering system for emergency steering, double acting steering cylinders
- Operating Station: Cab to be pressurized, heated, air conditioned and filtered, built in ROPS/FOPS protection, suspension type operators seat with seat belt, cab instrumentation or engine monitoring system with audible alarms, tinted glass windows, sun visor, front and rear intermittent windshield wipers, work lights, headlights, stop, tail and turn signal lights, left and right mirrors
- Body: Dump body tipping angle 70 degrees, mud flaps, two single stage double acting body hoist cylinders, 18 yd. heaped capacity, body rise time maximum 12 seconds
- Miscellaneous: 95 gal fuel tank minimum, guard or shielding package



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Excavator: All Terrain Walking Excavator

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Weight: 15,873 lbs. 2x4, 17,196 lbs. 4x4 Option
- Engine/Cab: Diesel engine, minimum 95 net hp, roll over enclosed cab air conditioned and heated, hinged quick release side window for emergency exit (operational at all boom positions), hinged front window opening outward for safety (not inward reducing operator head room), gauges or warning indicators for fuel level, engine oil, hydraulic oil and coolant, mirrors, air suspension operators ft. seat, full size cab (width of machine)
- Travel System: Minimum high-speed travel- 5 mph, minimum grade-ability 70%, four tires
- Hydraulic System: Digging depth- 15'4", auxiliary hydraulic circuit and controls plumbed to the end of stick with disconnect to allow the use of hydro-mechanical work tools, hydraulic swing system, stabilizers to be individually controlled in the vertical and horizontal positions
- Electrical System: Work lights
- Bucket: 4' wide grading bucket



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Excavator: Hydraulic Excavator - 15,590 lbs. Operating Weight

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Weight: Minimum operating weight- 15,590 lbs.
- Engine: 53 hp diesel engine, fuel capacity 26 gal
- Travel System: Minimum high-speed travel of 3.0 mph
- Undercarriage: Overall track length 9' 1", overall track width 11' minimum 7' 6", shoe width 17.7" minimum
- Operating Station: ROPS Cab to be air conditioned, heated and pressurized filtration system, opening front windshield, adjustable suspension type seat with safety belt, tinted safety glass, engine monitoring system with audible alarms, work lights
- Stick, Boom, Bucket: Boom and stick combination to allow minimum reach at ground level of 20' 11", bucket to be general purpose bucket, appropriately sized for machine and included
- Swing System: Swing radius 5' approximate, swing speed 9.0 rpm



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Excavator: Hydraulic Excavator - 38,000 lbs. Operating Weight

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Weight: Minimum operating weight- 38,000 lbs.
- Engine: Turbocharged diesel engine 113 hp
- Travel System: Travel speed of 3.2 mph
- Hydraulic System: Standard auxiliary hydraulic valve, main hydraulic system flow 72 gpm minimum
- Undercarriage: Overall track length 12' 10" minimum, overall track width 8' 5" minimum, shoe width 24"
- Operating Station: ROPS Cab to be air conditioned, heated and pressurized filtration system, intermittent windshield wipers, opening front windshield, adjustable suspension type operator seat with safety belt, work lights



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Excavator: Hydraulic Excavator - 76,550 lbs. Operating Weight

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Weight: Minimum operating weight- 76,550 lbs.
- Engine: Turbocharged diesel engine 257 hp, fuel capacity 145 gal
- Travel System: Travel speed of 2.9 mph
- Hydraulic System: Standard auxiliary hydraulic valve, main hydraulic system flow 144 gpm minimum
- Undercarriage: Overall track length 16' 2", overall track width 10' 6", shoe width 24"
- Operating Station: ROPS cab to be air conditioned, heated and pressurized filtration system, intermittent windshield wipers, opening front windshield, adjustable suspension type operator seat with safety belt, tinted safety glass, engine monitoring system with audible alarm, work lights
- Stick, Boom, Bucket: Boom and stick combination to allow minimum reach at ground level of 35' 6", bucket to be a general-purpose bucket, appropriately sized for machine and include
- Swing System: Swing radius 12, Swing speed 9.2 rpm



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Excavator: Mini Hydraulic Excavator - 7,105 lbs. Operating Weight

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Weight: 7,105 lbs. minimum
- Engine/Cab: Diesel engine, minimum 23 hp, ROPS canopy, gauges or warning indicators for fuel level, engine oil, hydraulic oil and coolant
- Travel System: Minimum high-speed travel 2.3 mph, minimum gradeability, 20 degrees, 11" wide rubber belt tracks
- Hydraulic System: Digging depth 9' minimum, auxiliary hydraulic circuit and controls plumbed to the end of stick with disconnect to allow the use of hydro-mechanical work tools, backfill blade, hydraulic swing system.
- Electrical System: Work lights



FSA23-EQU21.0: Heavy Equipment Item Group Specifications

Excavator: Telescopic Excavator - 45,000 lbs. Operating Weight - Tracked Type

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Weight: Minimum operating weight 45,000 lbs.
- Engine: 4-cylinder turbocharged diesel, 170 hp at 2200 rpm, spin on type filters, two stage air cleaner, 12 volt 100 amp alternator, 90 gal fuel capacity
- Track Drive: 2-speed automatic with manual override, high torque piston motors each track, planetary drives, travel speed high 3.4 mph, low 1.9 mph, automatic parking brake, individual track control
- Tracks: 23.6 pad size
- Operator Station: Acoustical lined, adjustable seat, tinted safety glass, filtered fresh air, heater, air conditioned, and defroster, wipers and washers, skylight, work lights
- Operator Station Controls: Electric engine monitoring system, auto idle, electronic joysticks on adjustable pedestals, pedals for travel and steering, low/high travel switch, engine speed control
- Safety Items: Electric horn, movement alarm, fire extinguisher, mirrors, right and left side
- Hydraulic System: Hydraulic oil cooler, 120 hp track drive motors (each), 64 hp swing motor, electronic hydraulic system monitor, spin on hydraulic filters, swing speed 7.0 rpm, automatic swing brake
- Boom: Telescopic boom, 180 degree boom rotation, 30' reach at ground level from center pivot to buck cutting edge
- Bucket: 60" ditching bucket provided with machine, quick attach type 1
- Weight: Minimum operating weight- 47,000 lbs.



FSA23-EQU21.0: Heavy Equipment Item Group Specifications

Excavator: Telescopic Excavator - 47,000 lbs. Operating Weight - 6x6 Wheeled Type

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Weight: Minimum operating weight 47,000 lbs.
- Carrier: 6-cylinder turbocharged diesel engine, 250 hp at 2200 rpm, spin on type filters, two stage air cleaner, 24 volt 70 amp alternator, 6-speed automatic transmission, 1 to 1 transfer case with front axle disconnect, one person carrier cab, air ride seat, heater, air condition, and defroster, 2-speed windshield wipers, tinted glass, isolated and acoustic lined, gauges to monitor engine functions, frame sized for GVW and stress of mounted upper structure, bolt on front bumper, desiccant type, spin on type, air dryer, fuel tank 50 gal minimum,
- Safety: Electric horn, west coast mirrors with convex spot mirrors, tow hooks, fire extinguisher, backup alarm
- Front Axle: 16,000 front drive axle, leaf spring suspension, 16.5"x5" "S" cam brakes, automatic slack adjuster, integral power steering, hydraulic axle lockouts, 425/65R22.5 on/off road tires
- Rear Axle: Tandem axles 40,000 lbs. rated, Hendrickson rear suspension, 16.5"x7" "S" cam brakes, automatic slack adjusters, 11R 24.5 traction type tires
- Upper Structure: Hydraulic system- 80 hp drive motor, 44 hp swing motor, automatic swing park brake, 50 gal oil reservoir, spin on hydraulic filters, swing speed 8 rpm, hydraulic remote control- travel and steering controls in upper structure cab, automatic brakes and axle lockouts, movement alarm, upper structure cab- isolated and acoustic lined, tinted safety glass, adjustable operators seat, heater, air condition, and defroster, work lights, wipers and washers, mirrors on left and right, skylight upper structure control-electronic joysticks on adjustable pedestals, engine monitoring lights or gauge with audible warning or automatic shutdown, pedals for steering and travel, low/high travel switch, electric horn, engine speed control bucket- quick attach type, 60" ditching bucket provided with machine, boom- telescopic boom, 180 degree boom rotation, 30' reach at round level from upper structure pivot to bucket cutting edge



FSA23-EQU21.0: Heavy Equipment Item Group Specifications

Excavator: Vacuum Excavator - Trailer Mounted

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Weight: 14,000 lbs. GVWR
- Engine: 36 hp diesel engine, water cooled, fully enclosed sound attenuated engine enclosure (including vacuum pump and high-pressure water pump), 15 gal fuel tank
- Vacuum Pump: 580 cfm at 15" of mercury, mounted inside engine enclosure, washable filtration cylinders, reverse pressure (to clear hose and offload liquids)
- High Pressure Water System: 400 psi at 4 gpm water pump, low water automatic shutdown, two 100 gal poly water tanks, 50' high pressure water hose on hose reel, 5' and 3' wand and control handle
- Controls: Lockable and waterproof, curbside located, oil pressure, water temperature, fuel and vacuum gauge, electronic throttle
- Tank: Full open rear door, door hydraulically opened, twin dump cylinders, 6" stainless steel portal shutoff, 800 gal debris tank capacity
- Boom: 4" pickup hose, hydraulically powered in/out and up/down, boom cradle, 360 degree movement, 2 dielectric 3" suction wands, 33' rubber suction hose
- Trailer: 7,000 lbs. dexter torsion axles, 14,000 lbs. GVWR, 10,000 lbs. jack stand, I beam construction, Pintle hitch, electric brakes with safety breakaway, LT235/85R16 tires, Stop/tail/turn lights



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Excavator: Wheeled Hydraulic Excavator - 42,000 lbs. Operating Weight

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Weight: Minimum operating weight- 42,000 lbs.
- Engine: Turbocharged diesel engine 140 hp, spin on type filters, two stage air cleaner
- Travel System: Travel speed of 21 mph
- Hydraulic System: Standard auxiliary hydraulic valve, hydraulic system flow 99 gpm minimum
- Wheel Drive: Wheelbase 8' minimum, tire size 10:00x20, ground clearance 13" minimum, gradeability 61 percent
- Operating Station: Cab to be air conditioned, heated, and pressurized filtration system, intermittent windshield wipers, opening front windshield, vibration dampening cab mounts, adjustable suspension type operator seat with safety belt, tinted safety glass, engine monitoring system with audible alarms, work lights, stop/tail/turn and emergency flashers
- Stick, Boom, Bucket: Boom and stick combination to allow minimum reach at ground level of 30' minimum, bucket to be a general purpose bucket, appropriately sized for machine and included
- Swing System: Swing radius 7' approximate, swing speed 9.5 rpm minimum
- Miscellaneous: Fuel capacity of 77 gal minimum
- Blade/Outriggers: Front blade with 8' minimum, rear outriggers FLO



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Forklift: Cushion Tire - 4,000 lbs. Capacity

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Engine: 50 hp LP gas engine
- Transmission: Powershift type, inching pedal, 1 speed forward, 1 speed reverse
- Hydraulic System: 19.0 gpm at 2250 psi
- Chassis: Wheelbase- 46", tread width- 33" (with standard tires), ground clearance at lowest point- 3"
- Tire size: Front- 18.0 x 7 x 12 cushion tire, rear- 14.0 x 5 x 10 cushion tire, steering radius- 72"
- Brakes: Hydraulic service brakes, mechanical parking brake
- Lift: Two stage lift mast, Lift height minimum - 130", Lift capacity- 4,000 lbs., fork spacing- 7" to 32" minimum, tilt- 5 degrees forward, 10 degrees backward
- Miscellaneous: FOPS protection, work lights, seat belts



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Forklift: Rough Terrain Forklift - 5,000 lbs. Operating Weight

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Lift Capacity: 5,000 lbs. max capacity
- Lift Height: 17'
- Weight: 12,800 lbs.
- Front Tire Track Width: 80"
- Turning Radius: 13'
- Engine: 70 hp diesel, 24 gal fuel tank
- Transmission: Auto, fwd/rev shuttle shift, 4WD
- Tires: Front 16.9-24, rear 12-16.5 lug type tires
- Mast: 3 stage, side shift, fwd/backward tilt, load cushioning
- Operator Station: Adjustable seat, seat belt, FOP overhead guard, b/u alarm , ANSI safety compliant



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Forklift: Telescopic Tool Carrier/Telehandler

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Approximate Dimensions: Length- 196", width- 90", height w/cab- 93", wheelbase- 113", weight: 17,155 lbs.
- Engine: Diesel Tier 4 100 hp, Turbocharged, heavy duty cooling system
- Powertrain: Hydrostatic drive, 2 travel speeds low speed 3.0 mph, high speed 18 mph, all wheel drive, 3 steering modes- all wheel, crab, and front wheel, industrial lug type tires
- Comfort, Convenience And Safety: Certified ROPS cab with air conditioning and heat, suspension seat w/ seat belt, work lights, safety lights, and warning beacon, attachment controls in cab, engine gauge instrumentation
- Hydraulic System: Lift capacity 7,700 lbs., max lift 22', boom breakout force- 8,000 lbs.



FSA23-EQU21.0: Heavy Equipment Item Group Specifications

Generator: 60kW Stationary

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Generator Requirements: Standby duty rated equal to the kW rating of the item group bid, 60kWh, 75 kVA, 8 power factor, 480 volts 3 phase, 60 Hz, 1,800 rpm, directly connected to the engine flywheel housing with flex coupling, generator shall meet performance class G3 of IEC, unit shall be in compliance with and be UL 2200 labeled
- Engine: Water cooled diesel engine, sized for generator set, emission compliant engine
- Controls: Solid state, microprocessor-based generator controls, controls shall provide all operating, monitoring and control functions for generator set
- Enclosure/Silencer: Complete diesel engine generator set including control panel, engine starting batteries and fuel oil tank shall be enclosed in a factory assembled water protective, sound attenuated enclosure, critical grade silencer, companion flanges, flexible stainless-steel exhaust
- Fuel Tank: Double wall sub-base tank integral to enclosure, 24-hour capacity at 100% at full load, rupture basin with 110% capacity, locking fuel caps, mechanical fuel level gauge, low fuel level alarm contact, fuel tank rupture alarm contact, must meet UL 142 and FDEP standards, as applicable
- Battery Charger: Current limiting battery charger to automatically charge batteries, charger shall be dual charge rate with automatic switching to boost rate when required, charger shall be mounted on genset package
- Startup And Testing: Vendor must coordinate all startup and testing activities with the engineer and owner, after installation is completed by others and normal power is available, the vendor must perform a one (1) day startup including the use of building load, the startup technician will instruct all necessary personnel how to operate and maintain the equipment in accordance to the manufacturer's requirements
- Conditions: In addition to equipment specified, each generator shall be equipped with all standard equipment as specified by the manufacture for this model and shall include but not be limited to the following necessary items- initial filling of oil and antifreeze (fuel provided by others), shrink wrap applied to the product to ensure a clean finish, during the startup, the technician shall record the following information and provide to the owner for his records- record Operating Voltage, Hz, Ph, and connected load (Amperage), package information consisting of make of generator, model, serial number of complete package, and startup date, record engine and generator serial numbers, one complete set of operation and maintenance manuals, two (2) year or 1500-hour standard standby generator warranty, labor, materials, and travel for the warranty period repair will be paid by manufacturer during normal business hours



FSA23-EQU21.0: Heavy Equipment Item Group Specifications

Generator: 125kW Stationary

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Generator Requirements: Standby duty rated at 125.0 kW, 156.3 kVA, 8 power factor, 480 volts, 3 phase, 60 Hz, 1,800 rpm, directly connected to the engine flywheel housing with flex coupling, generator shall meet performance class G3 of IEC, unit shall be in compliance with and be UL 2200 labeled
- Engine: Water cooled diesel engine, sized for generator set, emission compliant engine
- Controls: Solid state, microprocessor-based generator controls, controls shall provide all operating, monitoring and control functions for generator set
- Enclosure/Silencer: Complete diesel engine generator set including control panel, engine starting batteries and fuel oil tank shall be enclosed in a factory assembled water protective, sound attenuated enclosure, critical grade silencer, companion flanges, flexible stainless-steel exhaust
- Fuel Tank: Double wall sub-base tank integral to enclosure, 24-hour capacity at 100% at full load, rupture basin with 110% capacity, locking fuel caps, mechanical fuel level gauge, low fuel level alarm contact, fuel tank rupture alarm contact, must meet UL 142 and FDEP standards
- Battery Charger: Current limiting battery charger to automatically charge batteries, charger shall be dual charge rate with automatic switching to boost rate when required, charger shall be mounted on genset package
- Startup And Testing: Vendor must coordinate all startup and testing activities with the engineer and owner, after installation is completed by others and normal power is available, the vendor must perform a one (1) day startup including the use of building load, the startup technician will instruct all necessary personnel how to operate and maintain the equipment in accordance to the manufacturer's requirements
- Conditions: In addition to equipment specified, each generator shall be equipped with all standard equipment as specified by the manufacture for this model and shall include but not be limited to the following necessary items- initial filling of oil and antifreeze (fuel provided by others), shrink wrap applied to the product to ensure a clean finish, during the startup, the technician shall record the following information and provide to the owner for his records- record Operating Voltage, Hz, Ph, and connected load (Amperage), package information consisting of make of generator, model, serial number of complete package, and startup date, record engine and generator serial numbers, one complete set of operation and maintenance manuals, two (2) year or 1,500-hour standard standby generator warranty, labor, materials, and travel for the warranty period repair will be paid by manufacturer during normal business hours



FSA23-EQU21.0: Heavy Equipment Item Group Specifications

Generator: 150kW Mobile

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Generator Requirements: Standby duty rated at 150 kWe, 187 kVA, 8 power factor, prime power duty rating 135 kWe, 168 kVA, 0.8 power factor, main breaker shall be equipped with shunt trip, generator end shall be direct coupled to the engine flywheel with a flexible coupling, generator shall meet performance class G3 of IEC, jacket water heater
- Engine: 6-cylinder, water cooled, 1,800 rpm, diesel engine, current emission compliant diesel engine, spin on fuel and oil filters
- Voltage Change Over Switch & Distribution: Manual 3-position voltage change over switch to select each voltage as specified when the unit is not running, 1 Ph 120/240, 3 Ph 120/240, 3 Ph 120/208, and 3 Ph 277/480, a five-point connection shall be provided for ease of connection of load leads, one 50 amp, 120/240 vac, 1 Ph, twist lock receptacle, one 30 amp, 120/240 vac, 1 Ph, RV type receptacle, two 20 amp, 120/240vac, 1 Ph, duplex receptacle, two 20 amp, 120/240 vac, 1Ph, duplex GFI receptacle, each receptacle shall be protected by a individual circuit breaker, a receptacle shall be provided to power both the jacket water heater and on-board battery charger, two thumb screw type connection points shall be provided for remote auto start.
- Controls: Solid state, microprocessor-based generator controls, controls shall provide all operating, monitoring and control functions for the generator set, controls shall provide for auto start/stop functions, a emergency stop push button will be installed, a voltage adjustment shall be provided in the panel to adjust voltage in all voltage positions, a switch shall be provided in the panel to turn all power off in the panel if not being used
- Enclosure: Complete diesel engine generator set including control panel, engine starting batteries and fuel tank shall be enclosed in a factory assembled weather protective, sound attenuated enclosure, the sound attenuated enclosure noise level is not to exceed 73-75 dba @ 21', oil and water drain lines shall be provided and extend to the enclosure wall with valves for easy service, critical grade silencer, companion flanges, flexible exhaust-flex, keyed alike lockable doors
- Startup & Commissioning: One (1) day startup including operational test of equipment showing proper connection of cables with safety issues performed by a factory trained technician, the startup technician will instruct personnel how to operate and maintain the equipment in accordance with the manufacturer's requirements
- Conditions: In addition to equipment specified, each generator shall be equipped with all standard equipment as specified by the manufacturer for this model and shall include but not be limited to the following items- all product shall be new and of current design, initial filling of oil and antifreeze (diesel fuel by others), during startup, the technician shall record the



FSA23-EQU21.0: Heavy Equipment Item Group Specifications

following information and provide to owner for his records- Operating Voltage, Hz, Ph, and connected load (Amperage) [if any], package information consisting of make of generator, model, serial number of complete package, and startup date, written information consisting of make, model, serial number, and startup date, record engine and generator serial numbers, one complete set of operation and maintenance manuals, two (2) year or 1500-hour standard mobile generator warranty will apply, generator to be transported to authorized servicing dealer for warranty repair during normal business hours

- Trailer: The trailer must have a VIN and a certificate of origin

DRAFT



FSA23-EQU21.0: Heavy Equipment Item Group Specifications

Generator: 500kW Mobile

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Generator Requirements: Standby duty rated at 500 kW, 625 kVA, 0.8 power factor, prime power duty rating 450 kW, 563 kVA, 0.8 power factor, main breaker shall be equipped with shunt trip, generator end shall be direct coupled to the engine flywheel with a flexible coupling, generator shall meet performance class G3 of IEC, jacket water heater with service valves to ensure coolant does not need to be drained if heater needs service
- Engine: 6-cylinder, water cooled, 1800 rpm, diesel engine, current emission compliant diesel engine, spin on fuel and oil filters, 120 vac, 1 Ph, 60 Hz input 10 amp, 24 vdc, output automatic battery charger, standard 4D lead acid batteries with battery rack and cables
- Voltage Change Over Switch And Distribution: Manual 2 position voltage change over switch to select each voltage as specified when the unit is not running 3 Ph 120/208, and 3 Ph 277/480, load leads shall be attached to the generator using two (2) forms and shall be rated for 2000 amps, generator will be equipped with both, five (5) compression lugs per phase rated for 400 amps each, 20 amp, 120 vac, 1 Ph, male receptacle shall be provided to power the jacket water heater, a 20 amp, 120 vac, 1 Ph, male receptacle shall be provided to power the battery charger, two thumb screw type connection points shall be provided for remote auto start
- Controls: Solid state, microprocessor-based generator controls, controls shall provide all operating, monitoring and control functions for the generator set, controls shall provide for auto start/stop functions, an emergency stop push button will be installed, a voltage adjustment shall be provided in the panel to adjust voltage in all voltage positions, a switch shall be provided in the panel to turn all power off in the panel if not being used, a front face mounted circuit breaker shall be provided to protect the panel from any D.C. spikes
- Enclosure: Complete diesel engine generator set including control panel, engine starting batteries and fuel tank shall be enclosed in a factory assembled weather protective, sound attenuated enclosure, the sound attenuated enclosure noise level is not to exceed 80 dba @ 21', enclosure shall be constructed from aluminum, preferably out of .125 thickness and 5,058 marine grade aluminum, oil and water drain lines shall be provided and extend to the enclosure wall with brass ball valves for easy service, critical grade silencer (25 db reduction), companion flanges, flexible exhaust-flex, keyed-alike lockable doors
- In Base Fuel Tank Trailer: Trailer shall be DOT approved with proper serial number data plate indicating weight capacity minimum of 20,000 lbs., trailer will have dual axles with torque springs to reduce overall height of package, standard 7 pin vehicle wiring connector to be supplied, trailer will have two rear level jacks with sand shoes and front leveling jack, trailer will have hydraulic brakes, trailer will have all necessary safety equipment to include, but not



FSA23-EQU21.0: Heavy Equipment Item Group Specifications

be limited to, an adjustable and removable pintle hitch, 36" safety chains, fenders, lights per DOT, and break away cable, tires will be minimum load range type "D" (8 ply rating) with matching steel rims, rims are to be finish painted, minimum 8-hour capacity at 75% load rating to determine single wall tank size, a mechanical fuel gauge will be provided, locking fuel cap, low fuel level alarm, all necessary vents and caps will be provided along with suction, return, and drain points

- **Battery Charger:** Battery will be installed in holding container with battery cables, current limiting battery charger to automatically charge batteries, charger shall be dual charge rate with automatic switching to boost rate when required, charger mounted inside generator set package, fully charged battery will be provided at time of delivery and startup, 120-volt shore power connector for battery charger
- **Startup And Commissioning:** One (1) day startup including operational test of equipment showing proper connection of cables with safety issues performed by a factory trained technician, the startup technician will instruct personnel how to operate and maintain the equipment in accordance with the manufacturer's requirements
- **Conditions:** In addition to equipment specified, each generator shall be equipped with all standard equipment as specified by the manufacturer for this model and shall include, but not be limited to, the following items- all product shall be new and of current design, initial filling of oil and antifreeze (diesel fuel by others), during startup, the technician shall record the following information and provide to owner for his records- Operating Voltage, Hz, Ph, and connected load (Amperage-if any), written Information consisting of make, model, serial number, and startup date, record engine and generator serial numbers, one complete set of operation and maintenance manuals, two (2) years or 1,000 hours standard mobile generator warranty will apply, whichever occurs first, generator to be transported to authorized servicing dealer for warranty repair during normal business hours
- **Trailer:** The trailer must have a VIN and a certificate of origin



FSA23-EQU21.0: Heavy Equipment Item Group Specifications

Generator: 500kW Stationary

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Generator Requirements: Standby duty rated at 500 kW, 625 kVA, 0.8 power factor, 480 volts, voltage options are- 120/240, 120/208 or 277/480 3 Ph, directly connected to the engine flywheel housing with a flex coupling, generator shall meet performance class G3 of IEC, unit shall be compliance with UL 2200 specifications
- Engine: 6-cylinder, water cooled, 1800rpm, diesel engine, emission compliant engine to stationary standby regulations.
- Controls: Solid state, microprocessor-based generator controls, controls shall provide all operating, monitoring and control functions for the generator set, control panel is NFPA110 compliant
- Enclosure/Silencer: Complete diesel engine generator set including control panel, engine starting batteries and fuel oil tank shall be enclosed in a factory assembled weather protective, sound attenuated enclosure with oil and water drain lines, enclosure shall be constructed from aluminum, preferably out of .125 thickness and 5,058 marine grade aluminum, critical grade silencer (25DB Reduction), companion flanges, flexible stainless-steel exhausts flex
- Fuel Tanks: Double wall sub-base diesel fuel tank shall be integral to the enclosure, 24-hour capacity at 75% load rating, rupture basin will be of 110% capacity, locking fuel caps, all necessary vents and caps will be provided, mechanical fuel level gauge, low fuel level alarm contact, fuel tank rupture basin alarm contact, must meet UL 142 and FDEP standards
- Battery Charger: Current limiting battery charger to automatically charge batteries, charger shall be dual charge rate with automatic switching to boost rate when required, charger shall be mounted on genset package.
- Startup And Commissioning: Vendor must coordinate all startup and testing activities with the engineer and owner, after installation has been completed, approved by the local electrical inspector, and normal power is available, the vendor will perform a one (1) day startup including the use of building load, the startup technician will instruct all necessary personnel how to operate and maintain the equipment in accordance to the manufacturer's requirements
- Conditions: In addition to equipment specified, each generator shall be equipped with all standard equipment as specified by the manufacture for this model and shall include but not be limited to the following necessary items- initial filling of oil and antifreeze, shrink wrap applied to the product to ensure a clean finish, during the startup, the technician shall record the following information and provide to the owner for his records- record operating voltage, Hz, Ph, and connected load (Amperage), package information consisting of make, model, serial number, and startup date, record engine and generator serial numbers, one complete set of



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

operation and maintenance manuals, two (2) years or 1,500 hours standard standby generator warranty, whichever occurs first, labor, materials, and travel for the warranty period repair will be paid by manufacturer during normal business hours

DRAFT



FSA23-EQU21.0: Heavy Equipment Item Group Specifications

Horizontal Directional Drill

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Width: 89"
- Height: 76"
- Weight: 20,700 lbs.
- Length: 20'
- Engine: 125 hp, liquid cooled diesel, meeting current emission level, 44 gal fuel capacity
- Operational: Thrust/pullback 28,000 lbs., carriage speed 240 fpm, spindle torque 4200' lbs., rotational speed 270 rpm, bore diameter 4", ground speed 3.0 mph, drill rack angle 14-21 degrees
- Controls: Touchscreen display
- Drill System: Hydraulic vise, stakedown system, strike alert, remote lockout, work lights
- Drill Pipe: Rod diameter- 2.38", length- 10', weight- 73 lbs., bend radius- 108'
- Color: Manufacturers standard color



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Leaf Collector: Trailer Mounted

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Motor: 74 hp diesel engine, liquid cooled, current level emission compliant, 50 gal fuel capacity
- Fan: 27" fan, direct drive
- Pickup Hose: 16" diameter, 3 function hydraulically controlled arm, safety interlock
- Collection Body: 30 cubic yd. capacity w/ tailgate, scissor hoist, hydraulic dump
- Ride On Operator Station: All machine controls to be located at operator station, seat belt, emergency shutdown
- Dust Control: Dust control system, pump, 3 nozzles , 90 gal water tank
- Trailer: Frame, axles, tires, electric brakes will be sized for GVWR of unit, DOT compliant marking and lighting, pintle hitch, yellow flashers, tongue jack
- Color: Manufacturers standard color



FSA23-EQU21.0: Heavy Equipment Item Group Specifications

Lift: Scissor Lift - Self Propelled

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Dimensions (approximate): 64" x 29" platform, 36" extension deck, 25' working height (raised), 18' platform height (raised), lift capacity 500 lbs.
- Power: 24 volt, 4-6 volt batteries, on board charging system, dual front wheel drive
- Brakes: 2 or 4 wheel brakes
- Platform: Fixed rails, 36" extension deck, AC power to platform, lanyard attachment points
- Safety: Manual platform lowering, emergency stop on platform and ground control, descent alarm, hour meter, horn, pothole guards, on board diagnostic system, tilt lever sensor with alarm, scissor maintenance prop



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Light Tower: Hybrid Light Tower

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Dimensions (approximate): length- 174", width- solar panels retracted 69", height- 72", mast deployed height- 30', weight- 1,850 lbs.
- Generator: Perkins 403.F.11-10 kW Tier 4, 2 20A/120 v receptacles, electric start 12-30 gal fuel tank, auto mode- automatic start for low battery hybrid systems automatically switches between solar battery, generator, or standard household current
- Trailer: Axle 2000 lbs., 13in" wheels, hitch 3 position adjustable ball, stabilizers- 2 extendable outriggers, 1 trailer jack, top mounted fork pockets and single lifting eye, powder coated DOT rated trailer with lights, trailer weight- 1,850 lbs.
- Mast: 30' extendable mast in 3 stages wind stability to 40 mph rotates 90 degrees
- Lights: 4 quick connect 320 watt each, LED lights, dimmer control, instant on/off, 365 day programmable timer for lights, on/off, lens patten spread of 150 degrees, meets DOT anti-glare regulations
- Solar Panels: 5 100 watt panels, operating temperature- 40c to 46c 7
- Batteries: 4 deep cycle batteries, optional lithium cells, 12 volt, 220 amp hours



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Light Tower: Light Tower - Trailer Mounted

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Dimensions (Approximate): Length- 170", width- 51", height- 74", mast deployed height- 30', weight- 1,610 lbs.
- Engine: 3-cylinder diesel engine, 12 hp at 1800 rpm, engine protection shutdown system
- Generator: Wattage output 7,000 watt max, 6000 watt continuous, brushless type, 120/240 volts at 60 hz +/- 6% regulated, amps at 120/240v 50/25, insulation class
- FUEL TANK: 30 gal capacity, run time (approx.) 64 hours
- Trailer: Axle 1,800 lbs., 13" tire size, hitch 2" ball, leaf spring suspension, tongue jack, 4 outrigger jacks
- Control Panel: Individual breakers for lights, hour meter, cabinet lights, external receptacles- 1-30 amp 120/240 volt, twist lock, 1 GFC1, 15 amp 120 volt
- Mast: 32' extendable mast, 4 each metal halide light heads, 440,000 lumens, 360-degree mast rotation, fold down for transport, winch for mast extension



FSA23-EQU21.0: Heavy Equipment Item Group Specifications

Loader: Loader Backhoe - 4x4

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Engine: Minimum 87 hp diesel engine, dry type, radial seal air cleaner and pre-cleaner unit, spin on type engine oil filter
- Transmission: 4-speed power shift or power shuttle transmission
- Operator Environment: OSHA approved ROPS canopy shall be integral, two front and two rear work and driving lights Stop and turn signals with flashing hazard lamps Instrument panel with a complete set of gauges or an electronic monitoring device Standard horn and audible back-up alarm
- Brakes: Brakes shall be oil immersed, hydraulically actuated, multiple disc on final drive input shaft Brakes shall be completely enclosed and sealed, fully self-adjusting
- Loader (Single Tilt Cylinder): Loader shall be equipped with a return to dig mechanism, loader shall have positive down pressure sufficient to lift the tractor front end off level ground, loader bucket SAE heaped capacity of minimum 1.3 yd. with replaceable bolt on edge
- Backhoe: Fixed length dipper stick digging depth approximately 14', reach from swing center, approximately 18', dump height, approximately 11' 3", digging force approximately 8,000 lbs., bucket dig force, approximately 11,990 lbs., 24" general purpose bucket with replaceable teeth



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Loader: Skid Steer - 1,850 lbs. Operating Capacity - Wheeled Type

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Engine: Minimum 3-cylinder 56 hp diesel
- Transmission: Hydrostatic drive forward, reverse, travel speed controlled by two hand levers
- Engine Equipment: Spin on type filters, dry type air filter
- Operator Environment: OSHA approved ROPS canopy shall be integral, front and rear work lights, hazard lights, engine monitoring system or gauges, with audible alarm, tires 10x16.5 extra walls, horn and backup alarm
- Brakes: Parking brake, hydrostatic main braking
- Loader: Front auxiliary hydraulics, foot or hand controls for bucket, minimum 62" wide construction bucket, operating capacity 1,800 lbs. minimum



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Loader: Skid Steer - 2,800 lbs. Operating Capacity - Wheeled Type

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Engine: Minimum 3-cylinder 83 hp diesel
- Transmission: Hydrostatic drive forward, reverse, travel speed controlled by two hand levers
- Engine Equipment: Spin on type filters, dry type air filters
- Operator Environment: OSHA approved ROPS canopy shall be integral, front and rear work lights, hazard lights, engine monitoring system or gauges, with audible alarm, horn and backup alarm, tires 14x17.5 extra wall
- Brakes: Parking brake, hydrostatic braking
- Loader: Front auxiliary hydraulics, foot or hand controls for bucket, minimum 84" wide construction bucket



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Loader: Skid Steer - 3,100 lbs. Operating Capacity - Tracked Type

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Engine: Minimum 3-cylinder 74 hp diesel, spin on type filters, dry type air filters
- Transmission: Hydrostatic drive, forward, reverse, travel speed controlled by two hand levers
- Operator Environment: OSHA approved ROPS canopy shall be integral, front and rear work lights, hazard lights, engine monitoring system or gauges, with audible alarm, horn and backup alarm
- Brakes: Parking brake, hydrostatic braking
- Bucket: Minimum 66" construction bucket, bolt on, replaceable cutting edge for bucket, operating capacity 3,100 lbs. minimum



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Loader: Wheel Loader - 1.5 cubic yd.

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Engine/Cab.: 6-cylinder diesel engine, liquid cooled, minimum 77 hp, ROPS cab with air conditioning and heat
- Transmission: Power shift transmission with torque converter or hydrostatic drive, minimum of 4 forward and 3 reverse speeds
- Drivetrain: Four wheel drive, 15.5-25 bias ply tires mounted on multi piece rims
- Loader: 1.5 cubic yd. general purpose bucket with bolt on cutting edge, bucket position indicator, automatic return to dig, rear drawbar, gauges and indicators- visual hydraulic oil level indicator, electronic monitor display of all fluid levels and temperatures, deluxe suspension seat with foam padding and backrest, articulated steering, clearance circle 34' .02", wheelbase of at least 7', minimum operating weight of 12,727 lbs.
- Electrical: Manual battery disconnect switch, driving lights, front and rear work lights, stop lights, warning lights and taillights



FSA23-EQU21.0: Heavy Equipment Item Group Specifications

Loader: Wheel Loader - 3.0 cubic yd.

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Engine/Cab: 6-cylinder diesel engine, liquid cooled, minimum 140 hp, ROPS cab with air conditioning and heat
- Transmission: Power shift transmission with torque converter or hydrostatic drive, minimum of 4 forward and 3 reverse speeds
- Drivetrain: Four wheel drive, 20.5-25 radial tires mounted on multi piece rims
- Loader: 3.0 cubic yd. general purpose bucket with bolt on cutting edge, bucket position indicator, automatic return to dig, rear drawbar, gauges and indicators- visual hydraulic oil level indicator, electronic monitor display of all fluid levels and temperatures; deluxe suspension seat with foam padding and backrest, articulated steering, 40 degrees minimum each direction, wheelbase of at 9' 4" minimum, minimum operating weight of 26,000 lbs.
- Electrical: Manual battery disconnect switch, driving lights, front and rear work lights, stop lights, warning lights and taillights



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Loader: Wheel Loader - 5.75 cubic yd.

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Engine/Cab: 6-cylinder diesel engine, liquid cooled, minimum 280 hp, ROPS Cab with air conditioning and heat
- Transmission: Power shift transmission with torque converter or hydrostatic drive, minimum of 4 forward and 3 reverse speeds
- Drivetrain: Four wheel drive, manufacturer's standard axle, 26.5-R25 radial tires mounted on multi piece rims
- Loader: 5.75 cubic yd. general purpose bucket with bolt on cutting edge, bucket position indicator, automatic return to dig, rear drawbar, gauges and indicators- visual hydraulic oil level indicator, electronic monitor display of all fluid levels and temperatures, deluxe suspension seat with foam padding and backrest, articulated steering, 40 degrees minimum each direction, wheelbase of 11' 4" minimum, minimum operating weight of 53,674 lbs.
- Electrical: Manual battery disconnect switch, driving lights, front and rear work lights, stop lights, warning lights and tail lights



FSA23-EQU21.0: Heavy Equipment Item Group Specifications

Low Speed Vehicle: Electric Type

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Classification: These vehicles are primarily used to transport people and limited cargo in the State of Florida on typical federal, state, county and city highways and roads that are posted for 35 mph or less and shall be designed to operate under typical environmental conditions, vehicles must conform to Federal Motor Vehicle Safety Standards, State of Florida Vehicle Safety Laws, regulations, specifications, standards, and requirements in effect as of the date of manufacture
- Engine: 5.5 hp 4 kW electric motor, 48 volt lead acid batteries (8 batteries x 6v), 110v eagle on board charger, 50 miles per charge, max forward speed 25mph, digital speedometer and dashboard
- Dimensions (approximate): Length- 96", height- 76", width- 48", wheel base- 66.9", ground clearance- 5", body- plastic body and fiberglass roof, DOT windshield with wiper
- Comfort Items: 4 person seating with flip rear seat for cargo
- Chassis/Steering/Suspension: 10' turning radius, steel frame type chassis, 500lbs. GVW capacity
- Tires And Wheels: 205/50-10 tires, 10" aluminum rims
- Brakes: 4 wheel hydraulic, hand brake
- Safety Items: 100% Electric with zero emissions, 12v headlights and indicators, voltmeter, turn signals, side and rear-view mirrors, reverse alarm, non-slip flooring, neutral switch when vehicle is standing still, horn



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Motor Grader: Large

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Engine: Liquid cooled 6-cylinder diesel with minimum of 140 net hp @ 1900 rpm
- Transmission: Power shift with direct drive, minimum 8 forward and 4 reverse speeds Brakes: Wet multiple disc
- Steering & Articulation: Front steer plus articulated, minimum articulation 20 degrees
- Moldboard: Minimum 12' long
- Operator Environment: Low profile cab, cloth adjustable seats, gauges including hour meter, fuel, articulation, engine coolant temperature
- Tires: Minimum 13.0-24 10 PR 9" single piece rim



FSA23-EQU21.0: Heavy Equipment Item Group Specifications

Motor Grader: Small

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Dimensions (approximate): Length- 21', width- 7', height with cab- 10' 4", weight- 15,200 lbs.
- Engine: Diesel, turbocharged 110 hp, 39 gal fuel tank
- Drive Train: Hydrostatic drive or power shift, 2-speed gear box
- Brakes: Fail safe brake system
- Steering/Articulation: 18 degree articulation left or right, front wheel lean
- Moldboard/Blade: 10' sliding/tilting moldboard, 10' blade, circle side shift, scarifier- center mount, front mount or rear mount acceptable, adjustable turn table, blade float control
- Operators Station: Enclosed cab, front and rear windshield wipers, suspension seat, air conditioned and heated cab, gauge package work lights



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Mower: 15ft. Flex Wing Rotary Mower

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Deck: Mower shall be rotary, flex wing style, 10 gauge steel minimum, replaceable full-length skid shoes, shall be easy clean style
- Blade Carrier & Blades: 7 gauge steel minimum, 1" thick cross bar weldment, "Stump Jumper" pan design, 2 free swinging updraft cutting blades ½" thick, heat treated alloy steel minimum, blades shall overlap a minimum of 6" for uniform cut, blade spindles shall be 1 ¼" diameter minimum
- Wheels/Tires: 6 replaceable puncture resistant foam filled airplane tailwheels
- Power Distribution: Main driveline shall be CAT 5, slip clutch protection shall be featured, gears shall be straight bevel with tapered roller bearings, a power divider shall have a rating of 190 hp minimum, center and wing gearboxes shall have a minimum rating of 190 hp
- General Features: Mower shall attach to the rear of the tractor using a self-level-lift hitch, front and rear chain deflectors, tongue shall have a jack stand



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Mower: Remote Controlled Brush Mower

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Approximate Dimensions: Length- 57", width- 59", height- 33", weight- 990 lbs.
- Engine: 24 hp 2-cylinder gas, pressurized oiling system, electric start w/ 16v, 16 a alternator 5 gal fuel capacity
- Track Drive System: Two 48v electric motors, infinitely variable gear reduction transmissions, multi lug type tracks, neoprene rollers
- Mower Deck: Twin spindle deck, 10 gage mower deck, blade bar 2x22" with 4 free swinging blades, electric clutch assembly w/ integral safety brake, mowing height range- 2 to 7"
- Remote Control: Remote control to control mower functions- travel speed, cutting height, hours, radio signal strengt state of charge of remote control battery, and mower on/off, remote control working range 328', max range 984', auto stop feature for loss of radio signal, rechargeable lithium ion batteries
- Safety: One touch emergency shut off switch



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Mower: Electric Zero Turn Radius Mower

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Electric Power: 36 hp gas equivalent, electric power
- Battery: 22 kWh battery w/ charger, 7 hours of mowing time
- Deck: 60" deck, 1.5-5.5" height adjustment, side discharge
- Wheels: 24x12 drive wheels, solid deck wheels
- Operator Station: Suspension seat, all controls, ROPS bar
- Mowing Speed: 11mph (approximate)



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Mower: Zero Turn Radius Mower

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Engine: 25 hp gas engine, positive feed oil system with spin on filter, electric start
- Drive Train/Axles: Spin on hydraulic filters
- Deck: 60" heavy duty mower deck, 3 blade spindles, manual deck lift, 1" to 5" cutting height, deck engagement electric clutch
- Wheels: Front wheels- 13x6-6 ribbed, minimum, Rear wheels- 24x11.5-12 turf
- Comfort & Convenience: High back full suspension seat, ROPS bar
- Approximate Machine Dimensions: Length- 82", height- 72" with ROPS, width- 63" without chute



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Pallet Jack: Electric 4,400 lbs. Capacity

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Weight: 900 lbs.
- Wheelbase: 51"
- Turning Radius: 58"
- Lift Capacity: 4,500 lbs.
- Travel Speed: 3.7 mph
- Turning Radius: 59"
- Gradeability: 8% (loaded)
- Drive: 1.3 kW drive AC motor, polyurethane drive wheels, electric brake, lift motor 1.2 kW
- Battery System: 150 Ah battery, integrated on board charger
- Controls: Tiller type control, multi-function control on tiller handle



FSA23-EQU21.0: Heavy Equipment Item Group Specifications

Pipe Inspection: Battery Operated Pipe Crawler Inspection System

Note: Due to the complexity of this type of equipment, it is suggested that the purchaser contact the vendor to ensure the item ordered is a complete, ready to work unit and is compatible with the end user's software/hardware requirements and performance expectations.

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Width: 6"
- Height: 5.5"
- Length: 28"
- Weight: 65 lbs.
- Depth Rating: 160'
- Pipe Range: 8" to 12"
- Speed: 12m/min maximum
- Pull Force: 130 lbs.
- Sensors: Incline, roll, leak, pan/tilt, distance
- Tether Reel: Motorized reel, 1,000' tether capacity, 1,600 lbs. break strength
- Battery Power: 19.2 VDC, 5 hour battery life, capable of optional hybrid power
- Lighting: 900 LM
- Controller: Weatherproof, splashproof, joystick type controls, battery powered
- Camera: 360 degree pan, 1080p/2mp resolution, tilt 280 degrees, zoom 10x optical 120x digital, focus auto or manual, exposure auto or manual



FSA23-EQU21.0: Heavy Equipment Item Group Specifications

Pump: Mobile Pump

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Design Requirements: Discharge size- 6", suction size- 6", capable of 1,750 gpm minimum, capable of 160' Total Dynamic Head (TDH) minimum, Duty Point, maximum- 1,000 gpm minimum at 120' Total Dynamic Head (TDH), solids handling capability size, minimum size- 3"
- Engine: Diesel engine, appropriate to pump size at continuous duty, emission compliant engine, industrial grade exhaust muffler and rain cap, oil and coolant drain lines with ball valves, low water level shutdown switch, 12 VDC system with battery rack and cables, 50 gal minimum fuel tank with low fuel level alarm and shutdown
- Pump: Check valve, self-priming system
- Controls: Solid state, microprocessor-based pump controls, controls shall provide all operating, monitoring and control functions for the pump set, controller will also provide 2 fully programmable contacts for input and output signals accordingly, controller will provide remote start stop control with adjustable ramp (speed) time control, UL 508 R and CSA C22.2 No. 14 approved
- Trailer: The manufacturer shall mount the diesel engine and pump unit with the above 50 gal subbase tank on a street legal DOT approved trailer, this trailer will be able to be rated for a safe travel at speeds of 60 mph and not be limited to the following specifications- trailer design shall be such that the county/city may easily remove the entire engine, fuel tank and pump from the trailer, 12 VDC electric system, lunette or military type towing ring with safety chains, single point lifting bar, license plate bracket, sand shoe type support stands front and rear, torque spring axles to meet load of trailer, the trailer must have a VIN and a certificate of origin
- Startup And Commissioning: Vendor must coordinate all startup and testing activities with the engineer/owner, after field delivery of the pump and trailer, an authorized factory representative shall perform the initial startup and field testing of the pump and trailer, if conditions permit, a site will be determined where connection will be made by the county/city to test the pump package, if a site cannot be prepared a standard operational test will be performed, at the same time the startup test is performed, the factory representative will provide all necessary operation, field maintenance and minor repair training as necessary, this will also include safety procedures and hazard assessment



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Roadway Advisory Board: Mobile Message Board

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Display Panel: Minimum panel size 72"x48"
- Expected Power: Solar and battery with battery charger, meets manufacturer requirements
- Trailer: 2" minimum ball coupler, meets manufacturer and highway safety requirements

DRAFT



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Roadway Advisory Board: Mobile Speed Board

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Display Panel: Amber or red LED, 12" minimum speed limit sign
- Radar Speed Unit: Miles per hour, directional radar
- Data Collection: Data and analysis software included
- Expected Power: Solar and battery with battery charger, meets manufacturer requirements
- Trailer: 2" minimum ball coupler, meets manufacturer and highway safety requirements

DRAFT



FSA23-EQU21.0: Heavy Equipment Item Group Specifications

Roadway Advisory Board: Mobile Speed Board/Automatic Licence Plate Reader

Note: Due to the complexity of this type of equipment, purchaser should research and verify the unit bid will meet their desired performance expectations and is compatible with their hardware/software requirements. It is recommended the vendor be contacted to assist with determining these factors prior to purchase.

Unit bid will be ready to work with batteries, carrying cases, technical manuals, etc.

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Power System: 3 AGM type batteries, integral 120v charger, 5 to 7 day runtime, solar panel
- License Plate Reader: 2 cameras, tablet processor, software, automated hotlist alerting, plate search and vehicle filtering
- Digital Speed Display: 13" digital display, configurable, flashing excessive speed message capability
- Radar: Radar included
- Posted Speed Limit Sign: Metal sign included
- Connectivity: Cellular connectivity
- Trailer: DOT approved trailer, all weather protection, maximum vandal protection



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Roadway Advisory Board: Mobile Traffic Advisory/Directional Signal Board

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Display: 15 lamps minimum, 48"x96" panel size
- Expected Power: Solar and battery with battery charger, meets manufacturer requirements
- Trailer: 2" minimum ball coupler, meets manufacturer and highway safety requirements

DRAFT



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Roller: Compaction Roller 30,000 lbs. - Single Drum

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Weight: Minimum operating weight with open rops 15,200 lbs.
- Drum/Vibratory System: Maximum compaction shall not be less than 30,000 lbs., drum shall have a compaction width of not less than 66", drum shall be smooth and not be less than 48" in diameter, vibratory system shall be hydraulically driven and have two amplitude settings, drum shall be equipped with an adjustable cleaning device, drum and vibratory pack shall be isolated from the machine during normal operation
- Engine/Cab: Turbocharged diesel engine, minimum 74 hp operator station shall be mounted to the frame with rubber mounts to further isolate the operation and controls from machine vibration during operation, gauges or warning indicators for fuel level, engine oil, hydraulic oil and coolant temperature with an alert sounding device activated whenever a warning indicator is illuminated, a backup alarm shall emit an audible alarm whenever the propel lever is moved into reverse
- Travel System: A machine must be hydrostatic driven for the rear axle and the drum drive motor
- Electrical System: 12 or 24 volt electric system, maintenance free battery supplying 750 cold cranking amps, wiring harness protected with nylon-braided wrap



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Roller: Large 22,000 lbs. - Double Drum Roller - 70in. Width

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Weight: Minimum operating weight 22,000 lbs.
- Drum/Vibratory System: Drum compaction width on both drums no less than 70", drum shall be smooth and not less than 48" in diameter, vibratory system shall be hydraulically driven, drum shall be equipped with scrapers both front and rear of both drums, drum shall be hydraulically driven and have two (2) amplitude settings
- Engine: Diesel engine of not less than 100 hp, reverse alarm for reverse operations
- Travel System: The machine shall be hydrostatically driven, steering shall be center articulated and oscillated
- Miscellaneous: Unit shall be equipped with pressurized water for both drums, electrical system shall be 12 or 24 volt



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Roller: Small 5,400 lbs. - Double Drum Roller - 47in. Width

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Weight: Minimum operating weight 5,423 lbs.
- Drum/Vibratory System: Drum compactor width on both drums no less than 47", drum shall be smooth and not less than 27.5" in diameter, vibratory system shall be hydraulically driven, drum shall be equipped with scrapers both front and rear of both drums, drum shall be hydraulically driven and have two amplitude settings
- Engine: Diesel engine of not less than 25 hp, reverse alarm for reverse operations
- Travel System: The machine shall be hydrostatically driven, steering shall be centered articulated and oscillated
- Miscellaneous: Unit shall be equipped with a pressurized water system for both drums, electrical system shall be 12 or 24 Volt



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Sewer Cleaner: Combination Sewer Cleaning/Vacuum Machine Body - 10 cubic yd.

Note: Incomplete unit. This is a bid award on a combination sewer cleaning/vacuum unit to be mounted on an appropriately sized cab & chassis truck. Agencies purchasing this unit will need to provide a cab & chassis truck of appropriate size, GVW, and options necessary to have the selected combination sewer cleaner/vacuuming unit mounted on or have the truck provider assist in ordering the correctly outfitted truck. All items factory installed unless otherwise noted.

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Air/Vacuum System: Positive displacement vacuum pump or centrifugal compressor, 3,500 CFM @ 14.5" of mercury minimum, muffler, vacuum relief valves, centrifugal separator with clean out, PTO or hydrostatic drive
- Debris Tank: 10 cubic yd. capacity, 45 degree hydraulic dump, top hinged, hydraulic door locks, sight glass or indicator, drain valve with hose, check ball system or vacuum breaker
- Boom Assembly: 270 degree boom working area, hydraulic up/down, clean out port, transport cradle, 8" boom hose, pendant control
- Water Pump: 2,500 psi, 80 gpm, pressure relief valve, wash down gun with relief valve
- Water Tank: 1,000 gal capacity, curb side fill, level indicators
- Hose Reel: 800' of 1" hose capacity, 400' of 1", 2,500 psi hose supplied, power in/out, reel speed control system, position lock system, engine and hose reel controls, level wind
- Drive System: Hydrostatic transfer case, split PTO, or auxiliary engine or transfer case



FSA23-EQU21.0: Heavy Equipment Item Group Specifications

Sewer Cleaner: Trailer Mounted Sewer Cleaner

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Engine: 60 hp diesel engine, water cooled, engine enclosure, 15 gal fuel tank
- High Pressure Water Pump: 4,000 psi at 18 gpm, pressure relief valve, triplex type pump, low water shutdown, multi-flow type system (pressure change without changes to engine rpm)
- Controls: Located next to hose reel, ignition, throttle, gauge package (tachometer, hour meter, oil pressure, volts, and low oil/high temp shutdown), water control valve
- Water Tank: 700 gal capacity, high density polyethylene with baffles, sight gauge 2 ½" overhead tank fill, anti siphon, air gap type, strainer, tank drain
- Hose Reel: 800' capacity of ½" high pressure sewer hose, hydraulic power in and out
- Hose Reel Drive Hydraulic System: Hydraulic pump 8 gpm, 15 gal hydraulic reservoir, spin on type hydraulic filter
- Trailer: 12,000 lbs. GVW, 6"x3/16" frame, tandem axle 2 5/16" hitch, tongue jack, 235/80 r 16" tires, fenders, breakaway switch, lighting as required by Federal and State laws, reflective striping, toolbox with locking system, LED directional arrowstick, warning beacon (tank mounted)
- Equipment Furnished: 500' of ½" high pressure sewer hose, 100' of ¼" hose and nozzle for small pipe, washdown gun and 25' of hose with quick disconnects, tiger tail hose protector, nozzles to be furnished, 15 degree, 35 degree, chisel point, grenade flushing type, skid assembly, and rotator nozzle



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Shop Tools & Equipment

Due to the complexity of this type of equipment, there are no base unit specifications. Purchaser should research and verify the model offered will meet their desired performance expectations. It is recommended the vendor be contacted to assist with determining needs, prior to purchase.

Units bid must be ready to work, with all necessary components and user manuals.

DRAFT



FSA23-EQU21.0: Heavy Equipment Item Group Specifications

Shredder: Mobile Shredder

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Approximate Dimensions: Weight- 27,000 kg, length-15 740mm, width- 2 520mm, material feeding height- 3 395mm, belt discharge height- 4 030mm
- Engine: Diesel, 540 hp @ 2100 rpm, Turbocharged w/ intercooler, 750 li fuel tank
- Powertrain: Hydro-static drive w/ auto speed control, variable displacement drive motors, axial piston pumps, variable displacement
- Rotor: Rotor diameter 920mm, rotor 30 max rpm, rotor shredding length 3,000 mm, rotor knives 33, reversible type, counter knives 23, adjustable rotor screen
- Controls: Gauge package, w/ engine protection shutdown, shredder control unit to protect from overloading, overheating and damage of the powertrain
- Conveyor: Hydraulic driven conveyor, raised and lowered by hydraulics
- Trailer: Trailer to be constructed and sized for the installed unit, and will meet all local, state, and federal laws for use on highway, hydraulic support legs



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Solid Waste Material Handler: Wheeled Type

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Engine: Tier IV final diesel engine, 132 hp, spin on filters, two stage air cleaner
- Weight: Minimum operating weight 48,000 lbs.
- Travel System: 2 speeds- 0-3.0 mph/0-12.0 mph
- Hydraulic System: Main hydraulic system flow 80 gpm
- Undercarriage: Two axles with all wheel drive, 8- 10:00x20 solid tires
- Operating Station: Cab to be climate controlled with pressurized filtration, hydraulic elevating cab, sliding door window and tilt out front window, tinted windows with safety glass, adjustable suspension seat with safety belt and seat heater, catwalk with handrail, fire extinguisher, rear view and right view camera system, halogen work lights on roof cap
- Working Equipment: Purpose built material handling boom and stick, safety check valves on boom and stick cylinders



FSA23-EQU21.0: Heavy Equipment Item Group Specifications

Stump Cutter

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Engine: 35 hp gasoline engine, 6 gal fuel tank, positive feed oil system with spin on filter, heavy duty air filter, 12 volt starting/charging system
- Ground Drive: Hydraulic ground drive, 2-speed travel, hydraulic brake system, hydraulic steering system, hydraulic system spin on filter, 4 gal hydraulic reservoir
- Cutter Drive: Electric drive clutch, adjustable V belt drive
- Cutter Wheel: 17" diameter, 16 dual cutting edge teeth, teeth pocket mounted, cutter wheel guard
- Controls: Hour meter, low-oil shutdown, boom swing left and right, boom up and down, travel forward and reverse, steering, operator presence shutdown
- Approximate Dimensions: Weight- 1,320 lbs., length- 110", width- 49", height- 53"
- Cutting Dimensions: Above ground- 24", below ground- 15"



FSA23-EQU21.0: Heavy Equipment Item Group Specifications

Sweeper: 3-Wheel Mechanical or Regenerative Air Sweeper

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Engine: 4-cylinder diesel engine, 74 hp minimum, 120 amp alternator, fuel water separator, 30 gal fuel tank capacity
- Transmission: Hydrostatic drive type, 35 gal reservoir, capable of 20 mph minimum
- Cab: Sealed type cab with filtered intake, tilt and telescoping steering column, tinted glass, sound suppressed, intermittent windshield wipers with washer, full gauge and warning lights for engine monitoring, climate controlled cab, heater, defroster and air conditioned, if cab is not center mounted, it must have dual controls for operating on either right or left hand side
- Frame: 116" wheelbase, rail type channel frame
- Safety Items: Dual west coast mirrors with spot mirrors, headlights, turn, brake and hazard lights, worklights for gutter brooms, cab mounted warning strobe light with protective cage, backup alarm, rearview backup camera
- Brakes/Steering: Hydraulic power assisted service brakes, parking brake, turning radius 15' maximum
- Debris Hopper: 3.5 yd. capacity minimum, 9' 6" minimum dump height
- Conveyor: Rubber belt type with flights, hydraulic drive
- Main Broom: 32" diameter minimum, 56" width tube type, hydraulic drive
- Gutter Brooms: Right & left side brooms to have adjustable down pressure located in cab, 36" diameter minimum, segmented type broom, hydraulic drive
- Water Spray System: 220 gal water tank, run dry type water pump, 15' hydrant fill hose, water spray jets adjacent to all brooms, water filter
- Pick Up Head: The following requirements are for the regenerative air system type sweeper, all other requirements are the same for either machine, 72" outside dimension, 12" pressure hose, 12" suction hose, spring type suspension
- Blower: The following requirements are for the regenerative air system type sweeper, all other requirements are the same for either machine, direct hydraulic drive, cast aluminum with abrasion resistant coating, blower housing rubber lined



FSA23-EQU21.0: Heavy Equipment Item Group Specifications

Sweeper: Cabover Mechanical Broom Street Sweeper

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Cab Chassis: Engine- 6-cylinder diesel, 200 hp minimum, transmission- automatic transmission to meet the correct engine size and GVW of vehicle, hydrostatic drive is acceptable, engine equipment- alternator- 12V/130 amp, fuel water separator, 50 gal fuel tank, cab- dual operating position type cab to include- steering, controls, etc. for sweeping from either side, rubber floor mats, air ride seating, pressurized cab with heat and air conditioning, instrumentation for truck- oil pressure, water temperatures, voltmeter gauges, instrumentation for sweeper- tachometer, hour meter, oil pressure, coolant temperature gauges, frame- rail type 80,000 psi, size- 10.9" x 3.5" x .34", frame overhang, wheelbase 130" minimum, front steel bumper, safety- Dual West Coast bright finish heated mirrors with LH & RH remote, intermittent windshield wipers, daytime running lights, backup alarm, auto shutdown, axles- front axle- 11,900 lbs. GVW, rear axle- 21,000 lbs. GVW, single speed rear axle, 22.5 x 8.25 steel wheels- disc type, 11R x 22.5 14-ply radial tires, brakes- antilock brakes, front air brakes- 15 x 4 drum, rear air brakes 16.5 x 7 drum, automatic slack adjusters- front and rear, air dryer- frame mounted
- Mounted Sweeper Body (Standard Equipment): Engine- 4 cylinder diesel, 47 hp, governed at 2,800 rpm, spin-on oil filter, alternator- 12V/60 amp, side brooms- right & left side gutter brooms (tilt control in cab), hydraulically raised & lowered, 42" diameter- segment type adjustable down pressure (Manual)- optional down pressure pump, main broom: length- 58" minimum, diameter- 35" minimum, hydraulic motor- direct or chain drive and reversible, full floating trailing arms w/shocks, lift control inside cab, sweeper body- overall height- 10' with strobe, lift capacity- 11,000 lbs. minimum, 4.5 cubic yd. hopper, dump height- 10' minimum. lift design- hydraulic 2-stage scissors, hopper inspection door, work lights- 1 on each gutter broom and one in rear, hydraulic system- hydraulic pump capacity minimum- 24 gpm @ 2,600 rpm, pump- dual tandem gear, reservoir - 21 gal, spin-on 10 micron hydraulic pump, externally mounted reservoir level indicator, water spray system- water tank construction- polyethylene and removable, water tank capacity- 280 gal minimum, fill hose 2 ½" x 16' with NST coupler, diaphragm pump type with run dry capability, pump capacity- 3.0 gpm minimum, minimum of 9 spray nozzles- 2 min per gutter broom, 3 min for main broom, water filter- 80 micron mesh cleanable, conveyor/elevator system- minimum of 9 flights- replaceable, belt material- rubber reinforced fabric, belt speed- variable with auxiliary engine rpm, drive- reversible with direct drive, elevator jam warning light & buzzer in cab, conveyor flush- built in



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Sweeper: Compact Air Sweeper - 2.3 cubic yd.

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Operating Weight: 8,800 lbs. GVWR, empty weight- 5,900 lbs.
- Engine/Transmission: 78 hp, hydrostatic drive
- Brakes/Tires: Drum type brakes (power assist), front tire size 6.50 R10, Radial, rear tire size 225/75 R10 Radial
- Sweeper Dimensions: Height- 72", width- 52", length- 162"
- Hopper: 2.3 cubic yd. capacity
- Gutter Brooms: Equipped with left and right side gutter brooms, front mounted 33.5" diameter, overall sweeping width 122"
- Water System: 66 gal recirculation water system capacity, 40 gal clean water system capacity
- Lighting/Safety: Lighting package to enable vehicle to operate on the road, work lights for operation of vehicle at night, amber warning beacon, intermittent wipers
- Comfort Items: Cab to be air conditioned and heated, suspension type operator seat
- Instrumentation: Full instrumentation to monitor operation of vehicle
- Fan Unit: Centrifugal type fan, wear resistant blades



FSA23-EQU21.0: Heavy Equipment Item Group Specifications

Sweeper: Regenerative Air Street Sweeper

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Cab & Chassis: Engine- 6-cylinder diesel, 200 hp minimum, transmission- Allison 2000 series, 5-speed automatic, engine equipment- alternator: 12 volt 100 amp, fuel water separator, cab- cab over, with rust preventative coating, dual operating position type cab to include- steering, controls, etc., for sweeping from either side, rubber floor mats, air ride suspension seats, both sides, pressurized cab with heat and air conditioning, instrumentation for truck- oil pressure, water temperature, voltmeter gauges, instrumentation for sweeper- tachometer, hour meter, oil pressure, coolant temperature gauges, frame- wheelbase- 152" minimum, front steel bumper, fuel tank- 50 gal, safety- west coast mirrors with lower mounted convex mirrors, intermittent windshield wipers, daytime running lights, backup alarm, auto shutdown system for sweeper power plant, axles- front axle- 11,900 lbs. GVW, rear axle- 21,000 lbs. GVW, single- speed rear axle, 22.5 x 8.25 steel wheels- disc type, brakes- air dryer
- Mounted Sweeper Body: Engine- 4-cylinder turbocharged diesel, 99 hp minimum, blower- direct belt drive, blower rating- 20,000 cfm, blower housing, pickup head- 90" OD, hose size- 14" pressure, 12" suction, hydraulically raised and lowered, side brooms- right and left side gutter brooms, hydraulically raised and lowered, 42" diameter- segment type, adjustable downward pressure, sweeper body- 7 yd. volume metric capacity, 50 degree dump angle or raker bar, centrifugal dust separator, hopper dump door to hydraulically open/close, lock and unlock, hopper screen- hinged, quick release, hydraulic system- direct drive hydraulic pump, water spray dust control system- water tank construction- polyethylene, 220 gal capacity, fill hose- 16' long, diaphragm pump type with run dry capability, pump capacity- 5 gpm pump pressure- 25 psi, 7 spray nozzles, 4" pickup head, 1" suction tube- 2 on each side of broom, filter- 80 mesh cleanable



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Sweeper: Self-Propelled Hydrostatic Broom

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Weight: Minimum operating weight 5,500 lbs.
- Engine: Diesel engine 74 hp at 2,200 rpm, pre-cleaner 54 clone or equivalent, 27 gal fuel tank
- Travel System: 2-speed hydrostatic drive, high speed travel, 20 mph, 225/75R15 tire size, joystick direction controls, or foot pedal, front or rear wheel steering
- Cab: Roll over and falling object protective structures, enclosed cab with air conditioner, heater and defroster fan, front windshield wiper, gauges or warning indicators for fuel level, engine oil, hydraulic oil and coolant, right and left side doors, right and left side mirrors, shall have safety lighting package and night operating lighting package
- Broom: Minimum 7' 6" poly or poly-steel brush, brush shall have quick charge core system, minimum 150 gal brush watering attachment, shall have variable brush down-pressure control, brush shall be hydraulically driven



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Tactical Vehicle: Skid Steer Mounted (The Rook)

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Vehicle Platform: CAT multi-terrain loader, 84 hp diesel engine, 2-speed powertrain, operating weight 13,000 lbs., fuel tank 26 gal, hydraulic quick coupler, enclosed ROPS cab with air conditioner and heater, dual level suspension undercarriage with self level, advanced machine information and control system
- Cab Armored Protection: Bullet proof glass, NIJ Level IV armor cab reinforcement fabrication
- Armored Deployment Platform: integrated video system, breaching ram, vehicle extraction tool, grapple claw



FSA23-EQU21.0: Heavy Equipment Item Group Specifications

Tool Carrier: Hydrostatic Drive

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Engine: 90 hp turbo diesel, heavy duty radiator with high flow fan with reversing, clean out valve, canister style air cleaner with pre-cleaner, electric start with engine pre-heat, full engine gauge package, 30 gal fuel tank
- Power Train: Hydrostatic, variable displacement piston transmission pump, two, heavy-duty, 4 wheel drive, steerable axles with parking and service brake, 3 steering modes- 4-wheel round, front wheel and 4-wheel crab, approximately 9,000 lbs. GVW (without attachments)
- Travel Speed: Work mode- variable 0-5 mph, travel mode- variable 0-20 mph
- Comfort, Convenience & Safety: Full air ride, suspension seat, certified ROPS canopy with AC, heat, am/fm radio with Bluetooth, tilt steering column with horn, seat belt with safety switch, turn signals and brake lights, flashing safety lights as well as dot reflector tape
- Attachment Options: Front lift arms with universal skid steer mounting plate for 10 skid steer attachments- broom/sweeper, 90" rotary mower, 88" flail mower, dozier blade, stump grinder, pallet forks, cold planer, big roll sod installer, landscape rake, rotary tiller, right side rotary mower, right side flail mower, right side boom/reach mower, 15' belly mower
- Conditions: In addition to equipment specified, mower will be equipped with all standard equipment as specified by the manufacturer for this model and shall comply with all EPA emission standards and all motor vehicle standards as established by the US DOT regarding the manufacturer of motor vehicles



FSA23-EQU21.0: Heavy Equipment Item Group Specifications

Tractor: Agriculture Tractor - 4x2

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Engine: Liquid cooled diesel with minimum of 75 PTO hp @ 2,200 rpm
- Transmission: Synchroshuttle type with a minimum of 8 forward and 3 reverse speeds
- Fuel Tank: Minimum 23 gal capacity
- Brakes: Oil cooled hydraulic
- Power Take Off: Speeds rpm- 540/1,000
- Hydraulic System: Open center system with standard remotes, standard output @ remote gpm- 10, main pump flow 17 gpm
- 3-Point Hitch: Electronic or mechanical 3-point hitch control, Category II, telescopic stabilizers, SAE lift capacity @ 24" standard lbs.- 3,600, lower draft arm link ends- extendable
- Tires: Not less than 18.4R-28 R1 radials, not less than 7.5L-15, 6-Ply F2



FSA23-EQU21.0: Heavy Equipment Item Group Specifications

Tractor: Compact Articulating Tractor - AWD

Note: Incomplete equipment. Unit bid is for the prime mover only, without attachments. Buyer should select attachments needed from the option list to complete the machine. Examples of attachments available are: bucket, grapple and/or forks. This will affect the final price.

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Engine: 4,500K- Briggs & Stratton 31 hp Vanguard M54
- Transmission: Manufacturer's standard hydrostatic
- Performance Items: SDLA controls for complete one-handed control of speed, direction, lift & auxiliary functions, weight transfer- transfers weight to front axle for added stability (optional 4,500K)
- Safety Items: Automatic PTO shut-off when weight is removed from seat, standard seatbelt, standard ROPS system, neutral assist
- Tires and Wheels: Manufacturer's standard tires and wheels (optional turf or bar tires)
- Attachment and Accessories: 30 commercial grade attachments for a variety of applications (sold individually, not factory installed), uses Ventrac quick hitch system for quick transition between applications



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Tractor: Small Agriculture Tractor - 4x4

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Engine: Liquid cooled diesel with minimum of 29 PTO hp @ 2,200 rpm
- Transmission: Hydrostatic drive or mechanical type transmission, 4WD front axle
- Fuel Tank: Minimum 7 gal capacity
- Brakes: Oil cooled hydraulic wet disc
- Power Take Off: Speeds rpm- 540
- Hydraulic System: Open center system with standard remotes, maximum main pump flow-6.3 gpm
- 3-Point Hitch: Category I, SAE lift capacity @ 24" standard lbs.- 1,435
- Tires: Not less than 11.2 x 24 rear, not less than 5-15 6-ply front



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Tractor: Tractor with Boom Mower - 4x4

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Engine: Liquid cooled diesel with minimum of 95 PTO hp @ 2,200 rpm
- Transmission: Synchroshuttle type with a minimum of 16 forward and 16 reverse speeds, 4WD front axle
- Fuel Tank: Minimum 38 gal capacity
- Brakes: Oil cooled hydraulic
- Power Take Off: Speeds rpm- 540/1000
- Hydraulic System: Closed center system with standard remotes, maximum pressure psi- 2,900, standard output @ remote 17 gpm, total of 29 gpm combined flow
- Point Hitch: Category II, telescopic stabilizers, SAE lift capacity @ 24" standard lbs.- 5,000, lower draft arm link ends- extendable
- Tires: Not less than 13.6R24 R1 rear radials, not less than 18.4R30 6-Ply F2
- Mounted Boom Mower: Minimum 23' boom reach, forward and reverse swing break away, integral frame, separate hydraulic circuit for mower head, 5' rotary cutter head, disc or bar type blade holder



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Trailer: Deck Over Flatbed Trailer - 16,000 lbs. GVWR

All trailers must In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Dimensions: Deck width- 8' 6", overall deck length- 25', dovetail length- 5', GVWR- 16,000 lbs.
- Frame: 5" channel side rails, 3" channel cross members on 16" centers, 4" channel undercarriage, 2" x 3/8" rub rail with stake pockets, pintle hitch
- Deck: 2 x 8 pressure treated deck, Galvanized deck screws, 5' dovetail, spring assist stand up ramps
- Axles: Tandem 8,000 lbs. Dexter oil bath axles (2), electric brakes, breakaway brake system with well cell battery
- Lighting System: Protected turn/stop/tail lights, wiring run in conduit, heavy duty trailer plug
- Miscellaneous: Spare tire and rack, lockable tool box, primed and painted- choice of color, tongue jack rated for GVWR of trailer



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Trailer: Deck Over Equipment - 40,000 lbs. GVWR

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Deck: 24' overall, 19' w/ 60" dovetail, 96" width
- Decking: 2" hardwood
- Ramps: 60" fold up ramps, 22" width
- Tiedowns: Heavy duty tiedowns
- Axles: (2) 22,500 lbs. axles, oil lubricated
- Brakes: Air brakes, w/ ABS
- Suspension: Multi-leaf, sized for GVWR of unit
- Tires: (8) 215/75R x 17.5 16 ply Radial
- Lighting: LED, DOT compliant stop, tail, turn and clearance
- Coupler: Adjustable pintle eye
- Jack: 2-speed jack, sized for trailer



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Trailer: Detachable Neck Lowboy Trailer 100,000 lbs. GVWR

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Deck: 50' overall, 24' clear deck length, 14' rear over axles, 8'6" deck width, swing out outriggers
- Decking: 1 ½" hardwood decking
- Ramps: Front folding ramps
- Tiedowns: 5 pair heavy duty tiedowns
- Flagholders: 2 pair
- Axles: 3, sized to meet GVWR of unit, oil lubricated
- Brakes: Air brakes, w/ ABS, automatic slack adjusters
- Suspension: Air ride type, sized for GVWR of unit
- Tires: 235/70R 22.5 Radial tires
- Lighting: LED DOT compliant stop/tail/turn, clearance, and mid turn
- Detachable Gooseneck: 48" kingpin height, fixed neck, 96" swing radius, hydraulic lift, hydraulic support, toolbox on neck



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Trailer: Enclosed Cargo Trailer - 7,000 lbs. GVWR

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Dimensions: Width- 7', length- 16', 7,000 lbs. GVWR
- Frame: Formed angle top and bottom sills, all exposed steel primed and painted, positive lock ball coupler, tongue jack, safety chains- DOT rated
- Floor/Walls/Roof: ¾" exterior grade plywood floor, ¼" plywood interior liner, .030" prefinished aluminum exterior, state colors, smooth galvanized steel or one-piece aluminum roof, fiberglass front cap, extruded aluminum bottom trim, extruded aluminum roof cove with drip rail, double locking door on rear
- Axles: Tandem 3,500 lbs. torflex axles, 15" wheels, 205 x 15 trailer rated tires, electric brakes with breakaway switch
- Lighting System: Protected turn/stop/tail lights, clearance lights, wiring run in conduit, heavy duty trailer plug
- Miscellaneous: Spare wheel and tire



FSA23-EQU21.0: Heavy Equipment Item Group Specifications

Trailer: Enclosed Utility Body/Trailer Mounted - 9,990 lbs. GVWR

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Length: 205"
- Width: 89"
- Weight: 4,600 lbs.
- GVWR: 9,900 lbs.
- Frame Construction: I beam type frame, specifically engineered to mount Knapheide KUVCC Body on
- Front Jack: Manual
- Rear Leg Stabilizers: 2 rear leg stabilizers
- Axle: 10,000 lbs. Torflex axle, oil hubs
- Brakes: Electric brakes
- Wheels and Tires: Dual rear wheels, tires sized for GVWR of unit
- Lighting: LED type, stop/turn/tail, backup
- Utility Body: Knapheide KUVCC body
- Doors: Continuous hinges, rotary latches, adjustable strikers, double panel, door seals, master lock, hold open springs
- Roof: Cross braced, rotary latches, adjustable strikers
- Rear Cargo Doors: Double panel, hold open shocks, door seals, rotary latches, adjustable strikers
- Interior Lights: LED lighting
- Shelving: 250 lbs. rating, hemmed dividers
- Floor: 1/8" treadplate w/cross sills
- Undercoating: Entire unit to be undercoated



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Trailer: Fixed Neck Lowboy Trailer - 70,000 lbs. GVWR

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Deck: 43' overall, 27' clear deck length, 4' dovetail
- Decking: 1 ½" hardwood decking
- Ramps: 8' x 3', fold up ramps, hydraulically raised
- Tiedowns: 8 pair heavy duty tiedowns
- Flagholders: 2 pair
- Axles: 2 sized to meet GVWR of unit, oil lubricated
- Brakes: Air brakes, w/ ABS, automatic slack adjusters
- Suspension: Spring type, sized for GVWR of unit
- Tires: 235/75R 17.5 Radial tires
- Lighting: LED DOT compliant stop/tail/turn, clearance, and mid turn
- Gooseneck: 48" kingpin height, fixed neck, 84" swing radius, toolbox on neck
- Landing Gear: 2 speed, 50,000 lbs. capacity



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Trailer: Hydraulic Drop Deck Trailer - 13,500 lbs. GVWR

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- GVWR: 13,500 lbs.
- Deck: 75" x 14' hydraulic non tilting, ground flat loading
- Lift Mechanism: Hydraulic
- Suspension: Rubber or air
- Deck: Steel treadplate
- Brakes: Electric on all axles
- Tires: 235/80R16 LRE Radial
- Lighting: All LED DOT compliant, stop/tail/turn, clearance
- Coupler: A-frame adjustable
- Tie Downs: Heavy duty D-Ring



FSA23-EQU21.0: Heavy Equipment Item Group Specifications

Trailer: Hydraulic Tail Trailer - 70,000 lbs. GVWR

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Dimensions: Deck width- 8' 6", overall length- 48', deck length- 25', hydraulic tail- 12' (8' with 4' fold under)
- GVWR: 70,000 lbs.
- Frame: Cambered "I" beam main frame, 49" kingpin height, 16" kingpin setting, 82" swing clearance, 8' upper deck length
- Deck: 1 ½" apitone or oak decking, 1 ½", floor plate over wheels, traction plate on hydraulic tail
- Hydraulic Tail: 8' main tail, 4' fold under tail, hydraulic actuated with tail lock, 14 degree load angle
- Landing Gear: Pin drop type or 2 speed type
- Axles/Suspension/Tires: 2- 22,500 lbs. axles, oil seal hubs, 6.5 x 17.5 steel wheels, 235/75R x 17.5 radial tires, air brakes with automatic slack adjustors, ABS brake system, air ride suspension with auto and manual controls
- Lighting: LED lighting, wiring in conduit, mid turn signals, lighting as per DOT regulations
- Miscellaneous Equipment: 12,000 lbs. hydraulic winch mounted on upper deck over kingpin, wireless control, toolbox on upper deck, hydraulic tail controls both sides, air ride controls with dump valve



FSA23-EQU21.0: Heavy Equipment Item Group Specifications

Trailer: Leachate Tanker - 6,500 gallons

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Approximate Dimensions: Length: 42', fifth wheel height- 49", capacity- 6,500 gal, operating pressure- 15 psi w/ vacuum relief
- Tank Construction: Stainless steel, external ring, one compartment, 6,500 gal, straight round w/ slope to rear, two baffles , three manways (lug) one located center and one in each baffled section, two manway cleanouts (4 lug) located in front head and rear head at bottom
- Top Walkway: Gripstrut 12" width, extending from rear to front manway, with handrail, and ladder to access walkway
- Discharges, Valves, and Plumbing: Pressure/vacuum relief valve 15 psi in manhole cover, 6" discharge w/ sliding gate valve at rear of tank drain pump, 4" discharge to pump w/ valve, manufacturer's plumbing to allow gravity discharge or pump discharge or filling, gravity discharge at rear of tank to utilize cam lock fittings and caps
- Pump: Hydraulically driven, bi-directional pump, controls at rear, stainless piping for pump hydraulics from pump to front curbside for truck attachment
- Hose Carriers: Located on fenders
- Cabinets: Two cabinets mounted curbside and roadside ahead of suspension
- Trailer Constuction: Stainless steel frame
- Axles: Two axles sized for GVWR of unit, oil lubricated hubs
- Brakes: Air brakes w/ ABS and rollover protection, aluminum air tanks, automatic slack adjusters
- Tires: Radial tires sized for GVWR of unit, aluminum wheels w/ mudflaps
- Landing Gear: Sized for GVWR of unit
- Lights: LED clearance, stop/turn/tail, all wiring run in protective conduit, worklight, w/ switch at rear, all wiring run to junction box at front of trailer
- Color: Stainless Steel



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Trailer: Livestock Trailer - 7,000 lbs. GVWR

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- GVWR: 7,000 lbs.
- Stall Size: 76" x 16'
- Interior Height: 6' 6"
- Doors: Side escape door and full swing rear, center cut gate
- Deck: Treated pine
- Axles: (2) 3,500 lbs., quick lubricating
- Brakes: Electric on all axles
- Suspension: Multi-leaf
- Tires: 205/75R15 Radial
- Lighting: All LED DOT compliant, stop/tail/turn, clearance
- Coupler: A-frame ball style
- Jack: 2,000 lbs. heavy duty



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Trailer: Pull Behind Dump Trailer - 14,000 lbs. GVWR

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- GVWR: 14,000 lbs.
- Bed: Grease fittings on all hinges, D-ring tie downs
- Bed Size & Frame: Width- 6' 8", length- 14', deck height- 24", tube steel box, 10GA bed floor, rear stabilizers, 12,000 lbs. tongue jack, 20" high sides and tailgate minimum
- Bed Lift: Scissor type hydraulic lift, 12 volt power unit with battery, 15' pendant control
- Axles: Dexter easy lube or equivalent, sized for GVWR of trailer, 4-wheel electric brakes with breakaway
- Miscellaneous: Conspicuity type on sides, tail/stop/turn lights, 7-way trailer plug, tarp system, spare tire, pintle type hitch or ball (customer selected)



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Trailer: Refrigeration/Freezer Trailer - 7,000 lbs. GVWR

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- GVWR: 7,000 lbs.
- Cooler Box Size: 72" x 12'
- Interior Height: 6' 5"
- Temperature Range: 0 to 50 degrees F
- Input Voltage: 120V 15A
- Insulation: R-25
- Food Safety: Anti-microbial gel or stainless interior coating
- Doors: 48" rear door with freezer strips
- Floor: ¾" keg duty floor
- Axles: (2) 3,500 lbs., quick lubricating
- Brakes: electric on all axles
- Tires: 205/75R15 Radial tires
- Lighting: All LED DOT compliant, stop/tail/turn, clearance
- Jack: 2,000 lbs. heavy duty
- Coupler: A frame ball type



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Trailer: Utility/Equipment Trailer - 7,000 lbs. GVWR

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Deck Size: 77" x 16'
- Sidewall Frame Height: 15" minimum
- Ramps: 48" rear folding tailgate
- Tie Downs: Heavy duty tie rings
- Deck: Treated pine
- Axles: (2) 3,500 lbs., quick lubricating
- Brakes: Electric on all axles
- Suspension: Multi-leaf
- Tires: 205/75R15 Radial tires
- Lighting: All LED DOT compliant, stop/tail/turn, clearance
- Coupler: A-frame 2 5/16" ball adjustable 4 hole
- Jack: 2,000 lbs. heavy duty



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Trailer: Waste Trailer with Walking Floor

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Dimensions: Length- 48', aluminum width- 102", side height- 100"
- Floor: Keith or Hallco running floor, extreme duty slats with center rib
- Crossmembers: 14" spacing
- Crosstubes: Center and rear crosstubes, bolt in style
- Lights: LED lights, mid turn lights.
- Tarp: Manual roll type- side to side, mesh type tarp
- Tailgate: Side swing- left or right, CAM locking system with safety chain, extreme duty hinges
- Landing Gear: Holland Mark V
- Axles: TP axles or equivalent, same inner and outer bearings, outboard mount hubs
- Suspension: Cast hangers, leaf springs
- Tires and Wheels: Steel disc 22.5 x 8.25, 11R22.5 Radial tires
- Miscellaneous: Tow hooks on rear, air deflector in front



FSA23-EQU21.0: Heavy Equipment Item Group Specifications

Transfer Switch: 600 Amp Automatic Transfer Switch

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Automatic Transfer Switch: Maximum voltage rating of 600 VAC, 60 Hz, 1Ph or 3Ph, open transition (break-before-make) transfer logic, transfer switch must meet the related industry standards: UL 1008- automatic transfer switches for use in emergency systems, CSA- automatic transfer switches, NEMA- industrial control and systems AC transfer switch equipment, IEC- automatic transfer switching equipment
- Rating: 600 amp, 3 pole, 277/480 VAC, 60Hz, enclosure type- NEMA 3r
- Functional: The automatic transfer switch shall automatically transfer the load to the generator supply in the event of a utility supply failure and return the load to the utility supply upon restoration. The automatic transfer switch power switching devices shall be mechanically and electrically interlocked to prevent the utility and generator supplies from being interconnected. All timers should be field adjustable to ensure proper field site compatibility.
- Automatic Sequence Of Operation: When the voltage on any phase of the utility supply is below present levels of rated voltage for a preset time delay, a contact shall close to initiate start of the standby generator. The load shall transfer to the generator supply when the generator voltage and frequency have reached acceptable present levels and the warm up time delay has expired. When the utility supply is restored to the above present levels of rated voltage on all phases, load transfer from generator to utility supply shall be initiated following expiry of the utility return timer. Once the transfer mechanism operates and opens the generator power switching device, the transfer mechanism shall stop in the neutral position (with the both power switching devices open) for the duration of the neutral delay timer setting to allow load voltage to decay prior to reconnecting the utility supply. The load shall be re-connected to the utility supply once the neutral delay timer expires and the transfer mechanism continues operation and closes the utility power switching device. The load shall immediately re-transfer to the utility supply (if within acceptable limits) should the generator supply fail prior to the expiry of the utility transfer delay. The generator set shall continue to operate following a load transfer for a cool down delay period, and then a contact shall open to stop the generator set. An "on load" test mode may be initiated which shall cause a simulated utility failure condition and transfer the load to the generator set. The transfer sequence shall be the same as for a utility power failure except a neutral delay sequence shall occur when transferring from utility to a generator source. The load shall immediately retransfer to the utility supply (if within acceptable limits) should the generator supply fail during an "on load" test mode.



FSA23-EQU21.0: Heavy Equipment Item Group Specifications

- **Factory Testing:** A certified factory test report shall be shipped with each switch at time of shipment. The automatic transfer switch shall be factory tested prior to delivery to the purchaser. The following test shall be conducted by qualified factory personnel: visual inspection, mechanical tests, electrical tests, final inspection.
- **Field Testing and Commissioning:** The automatic transfer switch shall be field tested once installed at the project site to confirm proper operation of the system. Schedule and witness testing activities shall be coordinated with the project engineer, site contractor, and owner as required in advance of the testing date. A qualified local factory-trained field representative shall conduct the necessary test to ensure proper operation of the switch. Visual inspection-electrical and mechanical inspection to verify the installation is correct as recommended by the transfer switch manufacturer and as per National Electric Code (NEC) requirements. Mechanical tests- as a minimum, the following mechanical tests shall be performed on the transfer switch: power conductor torque verification, verification of mechanical interlock, manual ATS mechanism operation, all mechanical fasteners/wire connections tight, confirmations of correct transfer switch voltage, current and withstand ratings as is required for the application, Meggar testing the power cabling to the transfer switch, verification of correct power cabling phasing and phase rotation prior to energization, confirmation of settings for all timers & voltages sensors, full function test-normal operation- 3 complete cycles of failing the utility supply and transfer load to/from the generator set, verification of all test modes operates correctly.
- **Conditions:** In addition to equipment specified, each automatic transfer switch shall be equipped with all necessary equipment as specified by the manufacturer for this model and shall include but not be limited to the following necessary items: shrink wrap applied to the product to ensure a clean finish, one complete set of operation and maintenance manuals, a two (2) year or 1,500 hour from date of standard standby warranty will apply from date of successful startup, labor, materials, and travel for the warranty period repair will be paid by manufacturer during normal business hours.



FSA23-EQU21.0: Heavy Equipment Item Group Specifications

Trencher: Walk Behind Trencher

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Engine: 25 hp gasoline engine, 7 gal fuel tank, positive feed oil system with spin on filter, 12 volt starting/charging system
- Ground Drive: Hydrostatic, rubber ground tracks, 7" track width, 31" track length on ground
- Trencher Drive: Hydraulic drive, 8 gal hydraulic reservoir, hydraulic system spin on filter
- Trencher Boom: Digging depth- 48", Auger diameter- 18", cutting width minimum- 4"
- Controls: Operator presence safety system, low-oil shutdown system, steering control, trencher controls, travel control, boom controls
- Approximate Dimensions: Weight- 1,550 lbs., length- 79", width- 34", height- 48"



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Underground Locating Equipment: Ground Penetrating Radar

Due to the complexity of this type of equipment, there are no base unit specifications. Purchasers should research and verify the unit bid will meet their desired performance expectations and is compatible with their hardware/software, if required. It is recommended the vendor be contacted to assist with determining performance and compatibility needs prior to purchase.

Unit bid must be ready to work with batteries, carrying cases, and technical manuals.

DRAFT



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Underground Locating Equipment: Utility Locator

Due to the complexity of this type of equipment, there are no base unit specifications. Purchasers should research and verify the unit bid will meet their desired performance expectations and is compatible with their hardware/software, if required. It is recommended the vendor be contacted to assist with determining performance and compatibility needs prior to purchase.

Unit bid must be ready to work with batteries, carrying cases, and technical manuals.

DRAFT



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Vehicle Lift: Mobile - 2 Column, Cabled

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Minimum Lift Capacity: Combined lift capacity of 36,000 lbs., 18,000 lbs. per column minimum
- Dimension: Width- 45" minimum, length- 48" minimum, minimum rise- 67"
- Operation: Weight gage for each column, operating LCD screen, speed- fully lowered to raised not to exceed 80 seconds, fits tire sizes 9"-24"
- Safety: Mechanical safety locks, override to manual operation in the event of power loss, meets all applicable safety standards
- Power: Cabled base, voltage 208-230 3-phase
- Equipment must comply with all applicable federal, state, and local regulations and meet OSHA, UL-201, NEC, and the latest ANSI standard, ANSI/ALI -ALCTV 2006 and IBC 2003, IBC 2006 Chapter 30 section 3001.2. Equipment must be structurally and safety tested, and certified to ANSI/ALI -ALCTV 2006 automotive lift standard. A copy of listing certification shall be supplied as part of the acceptance of the bid. Equipment must be supplied with all ANSI, ALI/ETL safety booklet, ANSI operations, installation, and maintenance booklets, ANSI/ALI aloim-2008 standard and lifting point guides. Equipment must be supplied with all ANSI, ALI/ETL safety decals. Decals must be permanently placed on the lift in clear view for the operator.



FSA23-EQU21.0: Heavy Equipment Item Group Specifications

Vehicle Lift: Mobile - 2 Column, Wireless

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Minimum Lift Capacity: Combined lift capacity of 36,000 lbs., 18,000 lbs. per column minimum
- Dimension: Width- 45" minimum, length- 48" minimum, minimum rise- 67"
- Operation: Weight gage for each column, operating LCD screen, speed- fully lowered to raised not to exceed 80 seconds, fits tire sizes 9"-24"
- Safety: Mechanical safety locks, override to manual operation in the event of power loss, meets all applicable safety standards, training included with purchase
- Power: Wireless
- Equipment must comply with all applicable federal, state, and local regulations and meet OSHA, UL-201, NEC, and the latest ANSI standard, ANSI/ALI -ALCTV 2006 and IBC 2003, IBC 2006 Chapter 30 section 3001.2. Equipment must be structurally and safety tested, and certified to ANSI/ALI -ALCTV 2006 automotive lift standard. A copy of listing certification shall be supplied as part of the acceptance of the bid. Equipment must be supplied with all ANSI, ALI/ETL safety booklet, ANSI operations, installation, and maintenance booklets, ANSI/ALI aloim-2008 standard and lifting point guides. Equipment must be supplied with all ANSI, ALI/ETL safety decals. Decals must be permanently placed on the lift in clear view for the operator.



FSA23-EQU21.0: Heavy Equipment Item Group Specifications

Vehicle Lift: Mobile - 4 Column, Cabled

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Minimum Lift Capacity: Combined lift capacity of 72,000 lb. ; 18,000 lb. per column minimum.
- Dimension: Width- 45" minimum, length- 48" minimum, minimum rise- 67"
- Operation: Weight gage for each column, operating LCD screen, speed- fully lowered to raised not to exceed 80 seconds, fits tire sizes 9"-24"
- Safety: Mechanical safety locks, override to manual operation in the event of power loss, meets all applicable safety standards
- Power: Cabled base
- Equipment must comply with all applicable federal, state, and local regulations and meet OSHA, UL-201, NEC, and the latest ANSI standard, ANSI/ALI -ALCTV 2006 and IBC 2003, IBC 2006 Chapter 30 section 3001.2. Equipment must be structurally and safety tested, and certified to ANSI/ALI -ALCTV 2006 automotive lift standard. A copy of listing certification shall be supplied as part of the acceptance of the bid. Equipment must be supplied with all ANSI, ALI/ETL safety booklet, ANSI operations, installation, and maintenance booklets, ANSI/ALI aloim-2008 standard and lifting point guides. Equipment must be supplied with all ANSI, ALI/ETL safety decals. Decals must be permanently placed on the lift in clear view for the operator.



FSA23-EQU21.0: Heavy Equipment Item Group Specifications

Vehicle Lift: Mobile - 4 Column, Wireless

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Minimum Lift Capacity: Combined lift capacity of 72,000 lbs., 18,000 lbs. per column minimum
- Dimension: Width- 45" minimum, length- 48" minimum, minimum rise- 67"
- Operation: Weight gage for each column, operating LCD screen, speed- fully lowered to raised not to exceed 80 seconds, fits tire sizes 9"-24"
- Safety: Mechanical safety locks, override to manual operation in the event of power loss, meets all applicable safety standards, training included with purchase
- Power: Wireless
- Equipment must comply with all applicable federal, state, and local regulations and meet OSHA, UL-201, NEC, and the latest ANSI standard, ANSI/ALI -ALCTV 2006 and IBC 2003, IBC 2006 Chapter 30 section 3001.2. Equipment must be structurally and safety tested, and certified to ANSI/ALI -ALCTV 2006 automotive lift standard. A copy of listing certification shall be supplied as part of the acceptance of the bid. Equipment must be supplied with all ANSI, ALI/ETL safety booklet, ANSI operations, installation, and maintenance booklets, ANSI/ALI aloim-2008 standard and lifting point guides. Equipment must be supplied with all ANSI, ALI/ETL safety decals. Decals must be permanently placed on the lift in clear view for the operator.



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Vehicle Lift: Mobile - 6 Column, Cabled

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Minimum Lift Capacity: Combined lift capacity of 108,000 lbs., 18,000 lbs. per column minimum
- Dimension: Width- 45" minimum, length- 48" minimum, rise minimum- 67", fits tire sizes 9"-24"
- Operation: Weight gage for each column, operating LCD screen, speed- fully lowered to raised not to exceed 80 seconds
- Safety: Mechanical safety locks, override to manual operation in the event of power loss, meets all applicable safety standards
- Power: Cabled base
- Equipment must comply with all applicable federal, state, and local regulations and meet OSHA, UL-201, NEC, and the latest ANSI standard, ANSI/ALI -ALCTV 2006 and IBC 2003, IBC 2006 Chapter 30 section 3001.2. Equipment must be structurally and safety tested, and certified to ANSI/ALI -ALCTV 2006 automotive lift standard. A copy of listing certification shall be supplied as part of the acceptance of the bid. Equipment must be supplied with all ANSI, ALI/ETL safety booklet, ANSI operations, installation, and maintenance booklets, ANSI/ALI aloim-2008 standard and lifting point guides. Equipment must be supplied with all ANSI, ALI/ETL safety decals. Decals must be permanently placed on the lift in clear view for the operator.



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Vehicle Lift: Mobile - 6 Column, Wireless

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Minimum Lift Capacity: Combined lift capacity of 108,000 lbs., 18,000 lbs. per column minimum
- Dimension: Width- 45" minimum, length- 48" minimum, rise minimum- 67", fits tire sizes 9"-24"
- Operation: Weight gage for each column, operating LCD screen, speed- fully lowered to raised not to exceed 80 seconds
- Safety: Mechanical safety locks, override to manual operation in the event of power loss, meets all applicable safety standards: training included with purchase
- Power: Wireless
- Equipment must comply with all applicable federal, state, and local regulations and meet OSHA, UL-201, NEC, and the latest ANSI standard, ANSI/ALI -ALCTV 2006 and IBC 2003, IBC 2006 Chapter 30 section 3001.2. Equipment must be structurally and safety tested, and certified to ANSI/ALI -ALCTV 2006 automotive lift standard. A copy of listing certification shall be supplied as part of the acceptance of the bid. Equipment must be supplied with all ANSI, ALI/ETL safety booklet, ANSI operations, installation, and maintenance booklets, ANSI/ALI aloim-2008 standard and lifting point guides. Equipment must be supplied with all ANSI, ALI/ETL safety decals. Decals must be permanently placed on the lift in clear view for the operator.



FSA23-EQU21.0: Heavy Equipment Item Group Specifications

Vehicle Lift: Mobile - 8 Column, Cabled

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Minimum Lift Capacity: Combined lift capacity of 144,000 lb. ; 18,000 lb. per column minimum.
- Dimension: Width- 45", length- 48" minimum, rise minimum- 67", fits tire sizes 9"-24"
- Operation: Weight gage for each column, operating LCD screen, speed- fully lowered to raised not to exceed 80 seconds
- Safety: Mechanical safety locks, override to manual operation in the event of power loss, meets all applicable safety standards
- Power: Cabled base
- Equipment must comply with all applicable federal, state, and local regulations and meet OSHA, UL-201, NEC, and the latest ANSI standard, ANSI/ALI -ALCTV 2006 and IBC 2003, IBC 2006 Chapter 30 section 3001.2. Equipment must be structurally and safety tested, and certified to ANSI/ALI -ALCTV 2006 automotive lift standard. A copy of listing certification shall be supplied as part of the acceptance of the bid. Equipment must be supplied with all ANSI, ALI/ETL safety booklet, ANSI operations, installation, and maintenance booklets, ANSI/ALI aloim-2008 standard and lifting point guides. Equipment must be supplied with all ANSI, ALI/ETL safety decals. Decals must be permanently placed on the lift in clear view for the operator.



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Vehicle Lift: Mobile - 8 Column, Wireless

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Minimum Lift Capacity: Combined lift capacity of 144,000 lbs., 18,000 lbs. per column minimum
- Dimension: Width- 45" minimum, length- 48" minimum, rise minimum- 67", fits tire sizes 9"-24"
- Operation: Weight gage for each column, operating LCD screen, speed- fully lowered to raised not to exceed 80 seconds
- Safety: Mechanical safety locks, override to manual operation in the event of power loss, meets all applicable safety standards, training included with purchase
- Power: Wireless
- Equipment must comply with all applicable federal, state, and local regulations and meet OSHA, UL-201, NEC, and the latest ANSI standard, ANSI/ALI -ALCTV 2006 and IBC 2003, IBC 2006 Chapter 30 section 3001.2. Equipment must be structurally and safety tested, and certified to ANSI/ALI -ALCTV 2006 automotive lift standard. A copy of listing certification shall be supplied as part of the acceptance of the bid. Equipment must be supplied with all ANSI, ALI/ETL safety booklet, ANSI operations, installation, and maintenance booklets, ANSI/ALI aloim-2008 standard and lifting point guides. Equipment must be supplied with all ANSI, ALI/ETL safety decals. Decals must be permanently placed on the lift in clear view for the operator.



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Vehicle Lift: Stationary - 2 Post Asymmetric Stationary Vehicle Lift 10k

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Minimum Lift Capacity: 10,000 lbs.
- Dimension: minimum width- 125", minimum width between posts- 110", minimum extended cylinder height- 142.5", minimum full rise height- 72", minimum ceiling height required- 12'
- Operation: Speed of rise- fully lowered to fully raised in 50 seconds
- Safety: Manual or automatic lock release, meets all applicable safety standards
- Motor: 2.0 hp 208-230 V minimum
- Accessories: Power upgrades options, air/electric workstation w/ filter/lubricator/regulator, tire tool, manager workstation w/ filter/lubricator/regulator, column height extensions, door protection
- Equipment must comply with all applicable federal, state, and local regulations and meet OSHA, UL-201, NEC, and the latest ANSI standard, ANSI/ALI -ALCTV 2006 and IBC 2003, IBC 2006 Chapter 30 section 3001.2. Equipment must be structurally and safety tested, and certified to ANSI/ALI -ALCTV 2006 automotive lift standard. A copy of listing certification shall be supplied as part of the acceptance of the bid. Equipment must be supplied with all ANSI, ALI/ETL safety booklet, ANSI operations, installation, and maintenance booklets, ANSI/ALI aloim-2008 standard and lifting point guides. Equipment must be supplied with all ANSI, ALI/ETL safety decals. Decals must be permanently placed on the lift in clear view for the operator.



FSA23-EQU21.0: Heavy Equipment Item Group Specifications

Vehicle Lift: Stationary - 2 Post Symmetric Stationary Vehicle Lift 12k

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Minimum Lift Capacity: 12,000 lbs.
- Dimension: Minimum width- 139", minimum width between posts- 114 7/8", minimum extended cylinder height- 160", minimum full rise height- 72", maximum ceiling height required- 16'
- Operation: Speed of rise- fully lowered to fully raised in 90 seconds
- Safety: Manual or automatic lock release, meets all applicable safety standards
- Motor: 2.0 hp 208-230 V minimum
- Accessories: Power upgrades options, air/electric workstation, w/ filter/lubricator/regulator, tire tool manager workstation w/ filter/lubricator/regulator, column height extensions, door protection
- Equipment must comply with all applicable federal, state, and local regulations and meet OSHA, UL-201, NEC, and the latest ANSI standard, ANSI/ALI -ALCTV 2006 and IBC 2003, IBC 2006 Chapter 30 section 3001.2. Equipment must be structurally and safety tested, and certified to ANSI/ALI -ALCTV 2006 automotive lift standard. A copy of listing certification shall be supplied as part of the acceptance of the bid. Equipment must be supplied with all ANSI, ALI/ETL safety booklet, ANSI operations, installation, and maintenance booklets, ANSI/ALI aloim-2008 standard and lifting point guides. Equipment must be supplied with all ANSI, ALI/ETL safety decals. Decals must be permanently placed on the lift in clear view for the operator.



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Vehicle Lift: Stationary - 2 Post Symmetric Stationary Vehicle Lift 15k

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Minimum Lift Capacity: 15,000 lbs.
- Dimension: Minimum width- 125", minimum width between posts- 120", minimum extended cylinder height- 160", minimum full rise height- 72", maximum ceiling height required- 17'
- Operation: Speed of rise- fully lowered to fully raised in 90 seconds
- Safety: Manual or automatic lock release, meets all applicable safety standards
- Motor: 2.0 hp 208-230 V minimum
- Accessories: Power upgrades options, air/electric workstation, w/ filter/lubricator/regulator, tire tool manager workstation w/ filter/lubricator/regulator, column height extensions, door protection.
- Equipment must comply with all applicable federal, state, and local regulations and meet OSHA, UL-201, NEC, and the latest ANSI standard, ANSI/ALI -ALCTV 2006 and IBC 2003, IBC 2006 Chapter 30 section 3001.2. Equipment must be structurally and safety tested, and certified to ANSI/ALI -ALCTV 2006 automotive lift standard. A copy of listing certification shall be supplied as part of the acceptance of the bid. Equipment must be supplied with all ANSI, ALI/ETL safety booklet, ANSI operations, installation, and maintenance booklets, ANSI/ALI aloim-2008 standard and lifting point guides. Equipment must be supplied with all ANSI, ALI/ETL safety decals. Decals must be permanently placed on the lift in clear view for the operator.



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Vehicle Lift: Stationary - 2 Post Symmetric Stationary Vehicle Lift 18k

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Minimum Lift Capacity: 18,000 lbs.
- Dimension: Minimum width- 125", minimum width between posts- 118", minimum extended cylinder height- 142.5", minimum full rise height- 85", maximum ceiling height required- 17'
- Operation: Speed of rise- fully lowered to fully raised in 60 seconds
- Safety: Manual or automatic lock release, meets all applicable safety standards
- Motor: 3.0 hp 208-230 V minimum
- Accessories: Power upgrades options, air/electric workstation, w/ filter/lubricator/regulator, tire tool manager workstation w/ filter/lubricator/regulator, column height extensions, door protection
- Equipment must comply with all applicable federal, state, and local regulations and meet OSHA, UL-201, NEC, and the latest ANSI standard, ANSI/ALI -ALCTV 2006 and IBC 2003, IBC 2006 Chapter 30 section 3001.2. Equipment must be structurally and safety tested, and certified to ANSI/ALI -ALCTV 2006 automotive lift standard. A copy of listing certification shall be supplied as part of the acceptance of the bid. Equipment must be supplied with all ANSI, ALI/ETL safety booklet, ANSI operations, installation, and maintenance booklets, ANSI/ALI aloim-2008 standard and lifting point guides. Equipment must be supplied with all ANSI, ALI/ETL safety decals. Decals must be permanently placed on the lift in clear view for the operator.



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

Vehicle Lift: Stationary - 2 Post Versymmetric Stationary Vehicle Lift 10k

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Lifting Capacity: 10,000 lbs.
- Lifting Configuration: Versymmetric (symmetric & asymmetric) arms 3-stage front/3-stage rear, rise height- 74.125", overall height- 134"/140", overall height (cylinder extended)- 143", 2' height extension available, 3' height extension available, overall width- 138.5"/ 143", drive-thru clearance- 100"/104.5", floor to overhead switch- 128.5"/134.5", front arm reach- 20"-42", rear arm reach- 37.625"-60", screw pad height- 3.875"-6.125", inside columns- 110"/114.5", motor/voltage- 2 hp, 208V-230V, 60 Hz, 1 Ph, speed of rise- 38 seconds, ceiling height required 12', ALI/ETL certified



**FSA23-EQU21.0: Heavy Equipment
Item Group Specifications**

**Vehicle Lift: Stationary - 4 Column, Alignment Lift with Front/Rear Jacks and Integrated
Turntables and Slip Plates 14k**

In addition to the manufacturer base specification for the item or model number indicated, items in this group must meet the following FSA base specification:

FSA Base Specification

- Lifting Capacity: 15,000 lbs.
- Lifting Configuration: Open or closed- front open max, wheelbase- 210", rise height- 78", overall length- 277.25", overall width- 142" front/134.5" rear, inside columns- 120", between columns- 222.5", height of columns- 99.5"/93.5", width of runways- 20", height of runways- 7", width between runways- 43" max, 2-wheel alignment- 194", 4-wheel alignment- 88"-158", air supply required- 90-120 psi, motor/voltage- 2 hp, 208V-230V, 60 Hz, speed or rise- 85 seconds, minimum recommended bay size- 12' x 26', ALI/ETL certified, colors available- red, blue, black



**FSA23-EQU21.0: Equipment
Contract Items**

FSA23 -EQU21.0: Equipment Item List			
Item Group	Make	Model	Model Number
All Terrain & Utility Vehicles: All Terrain Vehicles (Quad)	CanAm	Outlander	500
All Terrain & Utility Vehicles: All Terrain Vehicles (Quad)	Honda	Rubicon 520	TRX520FA5-R
All Terrain & Utility Vehicles: All Terrain Vehicles (Quad)	Polaris	Sportsman 570 EFI	A24SEA57A1
All Terrain & Utility Vehicles: All Terrain Vehicles (Quad)	Suzuki	KingQuad 400 ASI	LT-A400FM3
All Terrain & Utility Vehicles: All Terrain Vehicles (Quad)	Yamaha	Kodiak 450	YFM45KDXPG
All Terrain & Utility Vehicles: Electric Utility Vehicles (Side-by-Side)	Club Car	Caryall 700	Caryall 700
All Terrain & Utility Vehicles: Electric Utility Vehicles (Side-by-Side)	Columbia	Utilitruck	Utilitruck
All Terrain & Utility Vehicles: Utility Vehicles (Side-by-Side)	Bobcat	UW56	UW56
All Terrain & Utility Vehicles: Utility Vehicles (Side-by-Side)	Bobcat	UV34	UV34
All Terrain & Utility Vehicles: Utility Vehicles (Side-by-Side)	CanAm	Defender	HD7
All Terrain & Utility Vehicles: Utility Vehicles (Side-by-Side)	Clubcar	Carryall	1500G
All Terrain & Utility Vehicles: Utility Vehicles (Side-by-Side)	Cub Cadet	Challenger	MX 550
All Terrain & Utility Vehicles: Utility Vehicles (Side-by-Side)	Honda	Pioneer 700	SXS700M2M
All Terrain & Utility Vehicles: Utility Vehicles (Side-by-Side)	John Deere	Gator	HPX615E
All Terrain & Utility Vehicles: Utility Vehicles (Side-by-Side)	Kawasaki	Mule 4x4	4010
All Terrain & Utility Vehicles: Utility Vehicles (Side-by-Side)	Kubota	Diesel	RTVX900
All Terrain & Utility Vehicles: Utility Vehicles (Side-by-Side)	Polaris	Ranger 570 EFI	R23MAA57B1
All Terrain & Utility Vehicles: Utility Vehicles (Side-by-Side)	Yamaha	Viking	YXM70BPAP
Boat: Aquatic Weed Cutter Workboat	Weedoo	TC-3014	TC-3014
Boat: Aquatic Weed Cutter Workboat	Weedoo	TC 6450 Amphi-King	TC-6450
Bulldozer: 180hp	Caterpillar	D6	D6
Bulldozer: 180hp	John Deere	850L	850L
Bulldozer: 180hp	Komatsu	D65EX-18	D65EX-18
Bulldozer: 70hp	Caterpillar	D1	D1
Bulldozer: 70hp	John Deere	450P	450P
Bulldozer: 90hp	Caterpillar	D2	D2
Bulldozer: 90hp	John Deere	550P	550P
Bulldozer: 90hp	Komatsu	D39EX-24	D39EX-24
Chipper: Brush Chipper	Bandit	15XPC	15XPC
Chipper: Brush Chipper	Dura Tech	TC-15	TC-15
Chipper: Brush Chipper	Vermeer	BC1500	BC1500
Compactor: 80,000 lbs. Landfill Compactor	Al-Jon	Advantage	500
Compactor: 80,000 lbs. Landfill Compactor	Bomag	BC773RB-5	BC773RB-5
Compactor: 80,000 lbs. Landfill Compactor	Caterpillar	826	826
Compactor: 80,000 lbs. Landfill Compactor	Tana	H380	H380
Compactor: 80,000 lbs. Landfill Compactor	Volvo	LC450H	LC450H
Compressor: Air Compressor - Trailer Mounted	Atlas Copco	XAS 188 T4F	XAS 188 T4F
Compressor: Air Compressor - Trailer Mounted	Doosan	P185/HP185WDO-T4F	P185/HP185WDO-T4F
Compressor: Air Compressor - Trailer Mounted	MULTIQUIP	DIS185SSI4F	DIS185SSI4F
Compressor: Air Compressor - Trailer Mounted	Sullair	185 T4F	185 T4F
Compressor: Air Compressor - Trailer Mounted	Sullivan Palatek	D185P	D185P
Dump Truck: Articulating Off Road Dump Truck - 50,000 lbs. Payload	Bell	B25E	B25E
Dump Truck: Articulating Off Road Dump Truck - 50,000 lbs. Payload	Caterpillar	725	725
Dump Truck: Articulating Off Road Dump Truck - 50,000 lbs. Payload	DEVELON	DA30-5	DA30-5
Dump Truck: Articulating Off Road Dump Truck - 50,000 lbs. Payload	John Deere	260P	260P
Dump Truck: Articulating Off Road Dump Truck - 50,000 lbs. Payload	Komatsu	HM300-5	HM300-5
Dump Truck: Articulating Off Road Dump Truck - 50,000 lbs. Payload	Volvo	A25G	A25G
Excavator: All Terrain Walking Excavator	Kaiser	S8	S8
Excavator: All Terrain Walking Excavator	Menzi	Muck	M4
Excavator: Hydraulic Excavator - 15,590 lbs. Operating Weight	Bobcat	E88	E88
Excavator: Hydraulic Excavator - 15,590 lbs. Operating Weight	Bobcat	Excavator	E145
Excavator: Hydraulic Excavator - 15,590 lbs. Operating Weight	Caterpillar	308	308
Excavator: Hydraulic Excavator - 15,590 lbs. Operating Weight	DEVELON	DX89R-7	DX89R-7
Excavator: Hydraulic Excavator - 15,590 lbs. Operating Weight	Hitachi	ZX75US	ZX75US
Excavator: Hydraulic Excavator - 15,590 lbs. Operating Weight	Hyundai	R80CR-9A	R80CR-9A
Excavator: Hydraulic Excavator - 15,590 lbs. Operating Weight	John Deere	75P	75P
Excavator: Hydraulic Excavator - 15,590 lbs. Operating Weight	Kobelco	SK-75SR-3E	SK-75SR-3E
Excavator: Hydraulic Excavator - 15,590 lbs. Operating Weight	Komatsu	PC88MR-1	PC88MR-1

Excavator: Hydraulic Excavator - 15,590 lbs. Operating Weight	Kubota	KX080-4S	KX080-4S
Excavator: Hydraulic Excavator - 15,590 lbs. Operating Weight	Link-Belt	75X3	75X3
Excavator: Hydraulic Excavator - 15,590 lbs. Operating Weight	Takeuchi	TB290	TB290
Excavator: Hydraulic Excavator - 15,590 lbs. Operating Weight	Volvo	ECR88D	ECR88D
Excavator: Hydraulic Excavator - 38,000 lbs. Operating Weight	Caterpillar	317 GC	317 GC
Excavator: Hydraulic Excavator - 38,000 lbs. Operating Weight	DEVELON	DX180LC-5	DX180LC-5
Excavator: Hydraulic Excavator - 38,000 lbs. Operating Weight	Hitachi	ZX160LC	ZX160LC
Excavator: Hydraulic Excavator - 38,000 lbs. Operating Weight	Hyundai	HX160AL	HX160AL
Excavator: Hydraulic Excavator - 38,000 lbs. Operating Weight	John Deere	160P	160P
Excavator: Hydraulic Excavator - 38,000 lbs. Operating Weight	Kobelco	SK170LC	SK170LC
Excavator: Hydraulic Excavator - 38,000 lbs. Operating Weight	Komatsu	PC170LC-11	PC170LC-11
Excavator: Hydraulic Excavator - 38,000 lbs. Operating Weight	Link-Belt	160X4	160X4
Excavator: Hydraulic Excavator - 38,000 lbs. Operating Weight	Volvo	EC160E	EC160E
Excavator: Hydraulic Excavator - 76,550 lbs. Operating Weight	Caterpillar	336	336
Excavator: Hydraulic Excavator - 76,550 lbs. Operating Weight	DEVELON	DX350LC-7	DX350LC-7
Excavator: Hydraulic Excavator - 76,550 lbs. Operating Weight	Hitachi	ZX350LC	ZX350LC
Excavator: Hydraulic Excavator - 76,550 lbs. Operating Weight	Hyundai	HX330AL	HX330AL
Excavator: Hydraulic Excavator - 76,550 lbs. Operating Weight	John Deere	350P	350P
Excavator: Hydraulic Excavator - 76,550 lbs. Operating Weight	Kobelco	SK350LC	SK350LC
Excavator: Hydraulic Excavator - 76,550 lbs. Operating Weight	Komatsu	PC360LC-11	PC360LC-11
Excavator: Hydraulic Excavator - 76,550 lbs. Operating Weight	Link-Belt	350X4	350X4
Excavator: Hydraulic Excavator - 76,550 lbs. Operating Weight	Volvo	EC350 E	EC350 E
Excavator: Mini Hydraulic Excavator - 7,105 lbs. Operating Weight	Bobcat	E32	E32
Excavator: Mini Hydraulic Excavator - 7,105 lbs. Operating Weight	Caterpillar	303	303
Excavator: Mini Hydraulic Excavator - 7,105 lbs. Operating Weight	DEVELON	DX35Z-7	DX35Z-7
Excavator: Mini Hydraulic Excavator - 7,105 lbs. Operating Weight	Hitachi	ZX35-U	ZX35-U
Excavator: Mini Hydraulic Excavator - 7,105 lbs. Operating Weight	Hyundai	R35Z-9A	R35Z-9A
Excavator: Mini Hydraulic Excavator - 7,105 lbs. Operating Weight	John Deere	35P	35P
Excavator: Mini Hydraulic Excavator - 7,105 lbs. Operating Weight	Kobelco	SK35SR	SK35SR
Excavator: Mini Hydraulic Excavator - 7,105 lbs. Operating Weight	Komatsu	PC35MR-5	PC35MR-5
Excavator: Mini Hydraulic Excavator - 7,105 lbs. Operating Weight	Kubota	U35-4	U35-4
Excavator: Mini Hydraulic Excavator - 7,105 lbs. Operating Weight	Takeuchi	TB240	TB240
Excavator: Mini Hydraulic Excavator - 7,105 lbs. Operating Weight	Volvo	EC 35 D	EC 35 D
Excavator: Mini Hydraulic Excavator - 7,105 lbs. Operating Weight	Yanmar	VI035-6A	VI035-6A
Excavator: Telescopic Excavator - 45,000 lbs. Operating Weight - Tracked Type	Gradall	XL4200	XL4200
Excavator: Telescopic Excavator - 47,000 lbs. Operating Weight - 6x6 Wheeled Type	Gradall	XL4100	XL4100
Excavator: Vacuum Excavator - Trailer Mounted	RamVac	Vacuum Excavator	2000
Excavator: Vacuum Excavator - Trailer Mounted	Vac-Con	Mudslinger	MS800
Excavator: Vacuum Excavator - Trailer Mounted	Vermeer	LP873SDT	LP873SDT
Excavator: Vacuum Excavator - Trailer Mounted	X-Vac	X800	X800
Excavator: Wheeled Hydraulic Excavator - 42,000 lbs. Operating Weight	Caterpillar	M318	M318
Excavator: Wheeled Hydraulic Excavator - 42,000 lbs. Operating Weight	DEVELON	DX210W-7	DX210W-7
Excavator: Wheeled Hydraulic Excavator - 42,000 lbs. Operating Weight	Hyundai	HW170ACR	HW170ACR
Excavator: Wheeled Hydraulic Excavator - 42,000 lbs. Operating Weight	John Deere	190 GW	190 GW
Excavator: Wheeled Hydraulic Excavator - 42,000 lbs. Operating Weight	Volvo	EW180E	EW180E
Forklift: Cushion Tire - 4,000 lbs. Capacity	Caterpillar	2CC4000	2CC4000
Forklift: Cushion Tire - 4,000 lbs. Capacity	Crown	CGC20SC-9	CGC20SC-9
Forklift: Cushion Tire - 4,000 lbs. Capacity	Mitsubishi	FGC20CN	FGC20CN
Forklift: Cushion Tire - 4,000 lbs. Capacity	Toyota	50-8FGCU20	50-8FGCU20
Forklift: Telescopic Tool Carrier/Telehandler	Bobcat	TL723	TL723
Forklift: Telescopic Tool Carrier/Telehandler	Caterpillar	TL642	TL642
Forklift: Telescopic Tool Carrier/Telehandler	JLG	943	943
Forklift: Telescopic Tool Carrier/Telehandler	Manitou	MTA8044	MTA8044
Generator: 125kW Stationary	AKSA	APD-UJ125	APD-UJ125
Generator: 125kW Stationary	Blue Star Power Systems	JD125-02	JD125-02
Generator: 125kW Stationary	Caterpillar	D125	D125
Generator: 125kW Stationary	Generac	SD130	SD130
Generator: 125kW Stationary	Gillette	SPJD-1250	SPJD-1250
Generator: 125kW Stationary	LJP	UJ125	UJ125
Generator: 125kW Stationary	Tradewinds	T125	T125
Generator: 150kW Mobile	Atlas Copco	QAS 250	QAS 250

Generator: 150kW Mobile	Blue Star Power Systems	VD150-02FT4MP	VD150-02FT4MP
Generator: 150kW Mobile	Doosan	G190WCU-3A-T4F	G190WCU-3A-T4F
Generator: 150kW Mobile	Generac/Magnum	MDG175DF4	MDG175DF4
Generator: 150kW Mobile	IJP	AT150	AT150
Generator: 150kW Mobile	MULTIQUIP	DCA180SSJU4F3	DCA180SSJU4F3
Generator: 150kW Mobile	TechnoGen	FP170TSX	FP170TSX
Generator: 150kW Mobile	Tradewinds	TM150	TM150
Generator: 150kW Mobile	Wacker Neuson	G180	G180
Generator: 500kW Mobile	Blue Star Generator	VD550-02FT4MP	VD550-02FT4MP
Generator: 500kW Mobile	Caterpillar	XQ570	XQ570
Generator: 500kW Mobile	Tradewinds	TM500	TM500
Generator: 500kW Stationary	AKSA	APD-ULJ500	APD-ULJ500
Generator: 500kW Stationary	Blue Star Generator	VD500-01	VD500-01
Generator: 500kW Stationary	Caterpillar	C15	C15
Generator: 500kW Stationary	Generac	SD500	SD500
Generator: 500kW Stationary	Gillette	SPVD-5000	SPVD-5000
Generator: 500kW Stationary	IJP	ULJ500	ULJ500
Generator: 500kW Stationary	Tradewinds	T500	T500
Lift: Scissor Lift - Self Propelled	Genie	GS-1932	GS-1932
Lift: Scissor Lift - Self Propelled	JLG	JLG ES1932	JLG ES1932
Light Tower: Hybrid Light Tower	Signal Power	HT444PC	HT444PC
Light Tower: Light Tower - Trailer Mounted	Atlas Copco	Hiilight V4	Hiilight V4
Light Tower: Light Tower - Trailer Mounted	Doosan	LCV6WKUB-60HZ-T4F	LCV6WKUB-60HZ-T4F
Light Tower: Light Tower - Trailer Mounted	Generac	MLT4060	MLT4060
Light Tower: Light Tower - Trailer Mounted	Wacker Neuson	LTV6L	LTV6L
Light Tower: Light Tower - Trailer Mounted	Wanco	WLT-4MK6K	WLT-4MK6K
Loader: Loader Backhoe - 4x4	Caterpillar	416	416
Loader: Loader Backhoe - 4x4	John Deere	310P	310P
Loader: Skid Steer - 1,850 lbs. Operating Capacity - Wheeled Type	Bobcat	S62	S62
Loader: Skid Steer - 1,850 lbs. Operating Capacity - Wheeled Type	Caterpillar	236D3	236D3
Loader: Skid Steer - 1,850 lbs. Operating Capacity - Wheeled Type	John Deere	318G	318G
Loader: Skid Steer - 1,850 lbs. Operating Capacity - Wheeled Type	Kubota	SSV65	SSV65
Loader: Skid Steer - 2,800 lbs. Operating Capacity - Wheeled Type	Bobcat	S76	S76
Loader: Skid Steer - 2,800 lbs. Operating Capacity - Wheeled Type	Caterpillar	272D3	272D3
Loader: Skid Steer - 2,800 lbs. Operating Capacity - Wheeled Type	John Deere	330G	330G
Loader: Skid Steer - 3,100 lbs. Operating Capacity - Tracked Type	Bobcat	T770	T770
Loader: Skid Steer - 3,100 lbs. Operating Capacity - Tracked Type	Caterpillar	279D3	279D3
Loader: Skid Steer - 3,100 lbs. Operating Capacity - Tracked Type	John Deere	331G	331G
Loader: Skid Steer - 3,100 lbs. Operating Capacity - Tracked Type	Kubota	SVL 75-3	SVL 75-3
Loader: Skid Steer - 3,100 lbs. Operating Capacity - Tracked Type	Takeuchi	TL12V2	TL12V2
Loader: Wheel Loader - 1.5 cubic yd.	Caterpillar	908	908
Loader: Wheel Loader - 1.5 cubic yd.	Hitachi	ZW120	ZW120
Loader: Wheel Loader - 1.5 cubic yd.	John Deere	324P	324P
Loader: Wheel Loader - 1.5 cubic yd.	Manitou	MLA7-75 H-Z	MLA7-75 H-Z
Loader: Wheel Loader - 1.5 cubic yd.	Takeuchi	TW80	TW80
Loader: Wheel Loader - 1.5 cubic yd.	Volvo	L45H	L45H
Loader: Wheel Loader - 3.0 cubic yd.	Caterpillar	926	926
Loader: Wheel Loader - 3.0 cubic yd.	DEVELON	DL220-7	DL220-7
Loader: Wheel Loader - 3.0 cubic yd.	DEVELON	DL280-7	DL280-7
Loader: Wheel Loader - 3.0 cubic yd.	Hitachi	ZW180	ZW180
Loader: Wheel Loader - 3.0 cubic yd.	Hyundai	HL940A	HL940A
Loader: Wheel Loader - 3.0 cubic yd.	John Deere	524P	524P
Loader: Wheel Loader - 3.0 cubic yd.	Komatsu	WA270-8	WA270-8
Loader: Wheel Loader - 3.0 cubic yd.	Volvo	L60H	L60H
Loader: Wheel Loader - 5.75 cubic yd.	Caterpillar	972	972
Loader: Wheel Loader - 5.75 cubic yd.	DEVELON	DL480-7	DL480-7
Loader: Wheel Loader - 5.75 cubic yd.	Hitachi	ZW310	ZW310
Loader: Wheel Loader - 5.75 cubic yd.	Hyundai	HL975	HL975
Loader: Wheel Loader - 5.75 cubic yd.	John Deere	744P	744P
Loader: Wheel Loader - 5.75 cubic yd.	Komatsu	WA480-8	WA480-8
Loader: Wheel Loader - 5.75 cubic yd.	Volvo	L150H	L150H

Low Speed Vehicle: Electric Type	Columbia	Journeyman	Journeyman 2+2
Low Speed Vehicle: Electric Type	GEM	E4	E4
Motor Grader: Large	Caterpillar	120	120
Motor Grader: Large	John Deere	620G	620G
Motor Grader: Large	Komatsu	GD655-7	GD655-7
Motor Grader: Small	LeeBoy	685D	685D
Motor Grader: Small	Weiler	G65	G65
Mower: 15ft. Flex Wing Rotary Mower	Alamo Industrial	Eagle	15
Mower: 15ft. Flex Wing Rotary Mower	Bush Hog	4115	4115
Mower: 15ft. Flex Wing Rotary Mower	John Deere	FC15M	FC15M
Mower: 15ft. Flex Wing Rotary Mower	Landpride	Batwing	RC5715
Mower: 15ft. Flex Wing Rotary Mower	Rhino	4150	4150
Mower: 15ft. Flex Wing Rotary Mower	Schulte	FX-1800	FX-1800
Mower: 15ft. Flex Wing Rotary Mower	Woods	BW15.50	BW15.50
Mower: Remote Controlled Brush Mower	Alamo Industrial	RC28	RC28
Mower: Remote Controlled Brush Mower	Energreen America	Robomax	Robomax
Mower: Remote Controlled Brush Mower	Energreen America	Robogreen	EVO
Mower: Remote Controlled Brush Mower	RC Mowers	R-52	R-52
Mower: Zero Turn Radius Mower	Exmark	Exmark Lazer	LZS749AKC604A1
Mower: Zero Turn Radius Mower	Ferris	ISX2200	5902079S
Mower: Zero Turn Radius Mower	Grasshopper	225	225
Mower: Zero Turn Radius Mower	Gravelly	Proturm	260
Mower: Zero Turn Radius Mower	Husqvarna	Z560	Z560
Mower: Zero Turn Radius Mower	John Deere	Z930M	Z930M
Mower: Zero Turn Radius Mower	Kubota	Z725KH-3-60	Z725KH-3-60
Mower: Zero Turn Radius Mower	Scag	Tiger Cat II	STCII-26FTEFI
Pump: Mobile Pump	Atlas Copco	PAS 150 HF	PAS 150 HF
Pump: Mobile Pump	BBA Pumps	BA150E	BA150E
Pump: Mobile Pump	ECO PUMP	Trailer Mounted Trash Pump	6612T
Pump: Mobile Pump	Global Pump	6GSTAP	6GSTAP
Pump: Mobile Pump	Godwin	CD 150S	CD 150S
Pump: Mobile Pump	Holland Pumps	PT6TPC-P1104D44T	PT6TPC-P1104D44T
Pump: Mobile Pump	MWI	CT006	CT006
Pump: Mobile Pump	Pioneer	PP66S12L71	PP66S12L71
Pump: Mobile Pump	Thompson Pump	6JSC	6JSC
Pump: Mobile Pump	Tradewinds	TPK66	TPK66
Roadway Advisory Board: Mobile Message Board	AMSIG	CMS-GP465T	CMS-GP465T
Roadway Advisory Board: Mobile Message Board	K&K Systems	MB9757	MB9757
Roadway Advisory Board: Mobile Message Board	Kustom Signal	Smart VMS	2
Roadway Advisory Board: Mobile Message Board	Ver-Mac	PCMS-1500	PCMS-1500
Roadway Advisory Board: Mobile Message Board	Wanco	Full Size 3-Line Message Board Trailer	WTLMB-A
Roadway Advisory Board: Mobile Message Board	Wanco	Full Size Full Matrix Message Board Trailer	WTMMB-A
Roadway Advisory Board: Mobile Speed Board	Applied Concepts Inc. DBA Stalker Radar	Stalker SAM	821-1000-00
Roadway Advisory Board: Mobile Speed Board	Applied Concepts Inc. DBA Stalker Radar	Stalker SAM - R	821-0310-00
Roadway Advisory Board: Mobile Speed Board	K&K Systems	LTER12	LTER12
Roadway Advisory Board: Mobile Speed Board	Kustom Signal	Smart	12
Roadway Advisory Board: Mobile Speed Board	Ver-Mac	SP-710V	SP-710V
Roadway Advisory Board: Mobile Speed Board	Wanco	Compact Radar Speed Trailer	WSDT3-S
Roadway Advisory Board: Mobile Traffic Advisory/Directional Signal Board	AMSIG	T815	T815
Roadway Advisory Board: Mobile Traffic Advisory/Directional Signal Board	K&K Systems	AT154896	AT154896
Roadway Advisory Board: Mobile Traffic Advisory/Directional Signal Board	Traffix Device	Scorpion II Trailer Attenuator with Mobile Traffic Advisory / Directional Signal Board	10002-TL3M-12TA
Roadway Advisory Board: Mobile Traffic Advisory/Directional Signal Board	Ver-Mac	ST-4825	ST-4825
Roadway Advisory Board: Mobile Traffic Advisory/Directional Signal Board	Wanco	WECO Arrow Board Trailer	WTPS5-LSA
Roadway Advisory Board: Mobile Traffic Advisory/Directional Signal Board	Wanco	Metro Matrix Message Board Trailer	WVTMM-L
Roller: Compaction Roller 30,000 lbs. - Single Drum	Bomag	BW177D-5	BW177D-5
Roller: Compaction Roller 30,000 lbs. - Single Drum	Caterpillar	CS44	CS44
Roller: Compaction Roller 30,000 lbs. - Single Drum	Hyundai	HR140C	HR140C
Roller: Compaction Roller 30,000 lbs. - Single Drum	Sakai	SV544	SV544
Roller: Large 22,000 lbs. - Double Drum Roller - 70in. Width	Bomag	BW190AD-5	BW190AD-5
Roller: Large 22,000 lbs. - Double Drum Roller - 70in. Width	Caterpillar	CB13	CB13

Roller: Large 22,000 lbs. - Double Drum Roller - 70in. Width	Dynapac	CC5200VI	CC5200VI
Roller: Large 22,000 lbs. - Double Drum Roller - 70in. Width	Hamm	HD90i-VV	HD90i-VV
Roller: Large 22,000 lbs. - Double Drum Roller - 70in. Width	Sakai	SW884	SW884
Roller: Large 22,000 lbs. - Double Drum Roller - 70in. Width	Volvo	DD120	DD120
Roller: Small 5,400 lbs. - Double Drum Roller - 47in. Width	Bomag	BW120SL-5	BW120SL-5
Roller: Small 5,400 lbs. - Double Drum Roller - 47in. Width	Caterpillar	CB2.7	CB2.7
Roller: Small 5,400 lbs. - Double Drum Roller - 47in. Width	Dynapac	CC1200VI	CC1200VI
Roller: Small 5,400 lbs. - Double Drum Roller - 47in. Width	Hamm	HD12-VV	HD12-VV
Roller: Small 5,400 lbs. - Double Drum Roller - 47in. Width	Volvo	DD25	DD25
Sewer Cleaner: Trailer Mounted Sewer Cleaner	Obrien	7018-SC	7018-SC
Sewer Cleaner: Trailer Mounted Sewer Cleaner	Sewer Equipment Co. of America	747-FR2000	747-FR2000
Sewer Cleaner: Trailer Mounted Sewer Cleaner	Vac-Con	VecJet	VJ750
Sewer Cleaner: Trailer Mounted Sewer Cleaner	Vactor	RamJet	4018
Sewer Cleaners: Combination Sewer Cleaning/Vacuum Machine Body - 10 cubic yd.	Aquatech	B-10	B-10
Sewer Cleaners: Combination Sewer Cleaning/Vacuum Machine Body - 10 cubic yd.	Gapvax	MC	1510
Sewer Cleaners: Combination Sewer Cleaning/Vacuum Machine Body - 10 cubic yd.	Sewer Equipment Co. of America	900 ECO-12YD	900 ECO-12YD
Sewer Cleaners: Combination Sewer Cleaning/Vacuum Machine Body - 10 cubic yd.	Super Products	Camel Max	1200
Sewer Cleaners: Combination Sewer Cleaning/Vacuum Machine Body - 10 cubic yd.	Vacall	AJV1010	AJV1010
Sewer Cleaners: Combination Sewer Cleaning/Vacuum Machine Body - 10 cubic yd.	Vac-Con	V311HN/1000	V311HN/1000
Sewer Cleaners: Combination Sewer Cleaning/Vacuum Machine Body - 10 cubic yd.	Vac-Con	VPD4211SHAE	VPD4211SHAE
Sewer Cleaners: Combination Sewer Cleaning/Vacuum Machine Body - 10 cubic yd.	Vactor	2100I	2100I
Shredder: Mobile Shredder	eFACTOR3	M&J 4000M	M&J 4000M
Shredder: Mobile Shredder	Tana Shark	440D	440D
Solid Waste Material Handler: Wheeled Type	Caterpillar	MH3022	MH3022
Solid Waste Material Handler: Wheeled Type	Sennebogen	818E	818E
Solid Waste Material Handler: Wheeled Type	Volvo	EW240E MH	EW240E MH
Stump Cutter	Bandit	SG-40	SG-40
Stump Cutter	Toro	STX 38	STX 38
Stump Cutter	Vermeer	SC362	SC362
Sweeper: 3-Wheel Mechanical or Regenerative Air Sweeper	Elgin Pelican	NP	Elgin Pelican
Sweeper: 3-Wheel Mechanical or Regenerative Air Sweeper	Global	R3	R3
Sweeper: 3-Wheel Mechanical or Regenerative Air Sweeper	Global	M3	M3
Sweeper: Cabover Mechanical Broom Street Sweeper	Bucher Municipal	ES351	ES351
Sweeper: Cabover Mechanical Broom Street Sweeper	Elgin	Eagle	Eagle
Sweeper: Compact Air Sweeper - 2.3 cubic yd.	Bucher Municipal	5006	5006
Sweeper: Regenerative Air Street Sweeper	Bucher Municipal	RT655	RT655
Sweeper: Regenerative Air Street Sweeper	Elgin	Crosswind J Plus	Crosswind J Plus
Sweeper: Regenerative Air Street Sweeper	Tymco	600	600
Sweeper: Self-Propelled Hydrostatic Broom	Broce	350 Broom	350 Broom
Sweeper: Self-Propelled Hydrostatic Broom	Holder	S100	S100
Sweeper: Self-Propelled Hydrostatic Broom	LeeBoy	CB-95	CB-95
Sweeper: Self-Propelled Hydrostatic Broom	Superior Broom	DT74	DT74
Tactical Vehicle: Skid Steer Mounted (The Rook)	Caterpillar	299D3 with Rook Option	299D3 with Rook Option
Tool Carrier: Hydrostatic Drive	Alamo Industrial	Mantis	155B
Tool Carrier: Hydrostatic Drive	Energreen America	Kommunal	Kommunal
Tool Carrier: Hydrostatic Drive	Mowermax	Tool Carrier	MMB22
Tool Carrier: Hydrostatic Drive	Multihog	Range	MX
Tractor: Agriculture Tractor - 4x2	Case IH	FARMALL	100C
Tractor: Agriculture Tractor - 4x2	John Deere	5105M	5105M
Tractor: Agriculture Tractor - 4x2	Kubota	M5-091	M5-091
Tractor: Agriculture Tractor - 4x2	Massey Ferguson	Tractor	MF4709
Tractor: Agriculture Tractor - 4x2	New Holland	Powerstar	100
Tractor: Compact Articulating Tractor - AWD	Antonio Carraro	Tigre	4000
Tractor: Compact Articulating Tractor - AWD	Avant	528	528
Tractor: Compact Articulating Tractor - AWD	Ventrac	4500 Series	Z
Tractor: Small Agriculture Tractor - 4x4	Bobcat	CT2035	CT2035
Tractor: Small Agriculture Tractor - 4x4	Case IH	FARMALL	35C
Tractor: Small Agriculture Tractor - 4x4	John Deere	3035D	3035D
Tractor: Small Agriculture Tractor - 4x4	Kubota	L3902 DT	L3902 DT
Tractor: Small Agriculture Tractor - 4x4	Massey Ferguson	MF1840E	MF1840E
Tractor: Small Agriculture Tractor - 4x4	New Holland	Boomer	35

Tractor: Tractor with Boom Mower - 4x4	Case IH	Maxxum with Motrim Boom Mower	115
Tractor: Tractor with Boom Mower - 4x4	John Deere	6120M with Tiger Bengal Boom Mower	6120M
Tractor: Tractor with Boom Mower - 4x4	John Deere	6120M Alamo Industrial Mower	6120M
Tractor: Tractor with Boom Mower - 4x4	Kubota	M6S-111 with Terrain King KB2300 Boom Mower	M6S-111
Tractor: Tractor with Boom Mower - 4x4	Massey Ferguson	6S.145	6S.145
Trailer: Deck Over Flatbed Trailer - 16,000 lbs. GVWR	Big Tex	22PH255	22PH255
Trailer: Deck Over Flatbed Trailer - 16,000 lbs. GVWR	Econoline	BP0821DE	BP0821DE
Trailer: Deck Over Flatbed Trailer - 16,000 lbs. GVWR	Felling Trailers	FT-16-2	FT-16-2
Trailer: Deck Over Flatbed Trailer - 16,000 lbs. GVWR	Globe Trailers	GTTU152-30-25	GTTU152-30-25
Trailer: Deck Over Flatbed Trailer - 16,000 lbs. GVWR	Interstate	16BST	16BST
Trailer: Deck Over Flatbed Trailer - 16,000 lbs. GVWR	SURE-TRAC	ST102204SDDO-B-150	ST102204SDDO-B-150
Trailer: Deck Over Flatbed Trailer - 16,000 lbs. GVWR	Texas Trailer	TX85258T	TX85258T
Trailer: Deck Over Flatbed Trailer - 16,000 lbs. GVWR	Towmaster	T-16LP	T-16LP
Trailer: Deck Over Flatbed Trailer - 16,000 lbs. GVWR	Trail King	TK20LP	TK20LP
Trailer: Deck Over Flatbed Trailer - 16,000 lbs. GVWR	XL Specialized Trailers	XL 24 T	XL 24 T
Trailer: Enclosed Cargo Trailer - 7,000 lbs. GVWR	Cargo Mate	Blazer	BL716TA2
Trailer: Enclosed Cargo Trailer - 7,000 lbs. GVWR	SURE-TRAC	STW8416TA	STW8416TA
Trailer: Enclosed Cargo Trailer - 7,000 lbs. GVWR	Wells Cargo	HD Wagon	WHD716T2
Trailer: Hydraulic Tail Trailer - 70,000 lbs. GVWR	Felling Trailers	FT-70-2-PL-HT	FT-70-2-PL-HT
Trailer: Hydraulic Tail Trailer - 70,000 lbs. GVWR	Globe Trailers	GTFH352-48-26	GTFH352-48-26
Trailer: Hydraulic Tail Trailer - 70,000 lbs. GVWR	Pitts	HD35	HD35
Trailer: Hydraulic Tail Trailer - 70,000 lbs. GVWR	Towmaster	T-70HT	T-70HT
Trailer: Hydraulic Tail Trailer - 70,000 lbs. GVWR	Trail King	TK80HT	TK80HT
Trailer: Hydraulic Tail Trailer - 70,000 lbs. GVWR	XL Specialized Trailers	XL 80PT	XL 80PT
Trailer: Pull Behind Dump Trailer - 14,000 lbs. GVWR	Big Tex	14LP-14	14LP-14
Trailer: Pull Behind Dump Trailer - 14,000 lbs. GVWR	Felling	FT-14 DT HD	FT-14 DT HD
Trailer: Pull Behind Dump Trailer - 14,000 lbs. GVWR	SURE-TRAC	ST8214HLOD-B-140	ST8214HLOD-B-140
Trailer: Pull Behind Dump Trailer - 14,000 lbs. GVWR	Towmaster	T-12HD	T-12HD
Trailer: Waste Trailer with Walking Floor	East Manufacturing	Unloader	48FT
Trailer: Waste Trailer with Walking Floor	Mac Trailer	TNSP48MF	TNSP48MF
Trailer: Waste Trailer with Walking Floor	Steco	AW048102	AW048102
Trailer: Waste Trailer with Walking Floor	Warren Equipment Inc.	WMFT-AS	WMFT-AS-48102
Transfer Switch: 600 Amp Automatic Transfer Switch	ABB-Zenith	ZTG600	ZGOL3BX32-AXXXXXX
Transfer Switch: 600 Amp Automatic Transfer Switch	ASCO	Series 300	Series 300
Transfer Switch: 600 Amp Automatic Transfer Switch	Caterpillar	CG	CG
Transfer Switch: 600 Amp Automatic Transfer Switch	Generac	TX/PSTS-600	TX/PSTS-600
Transfer Switch: 600 Amp Automatic Transfer Switch	Thomson	Auto Transfer Switch	TS 870
Trencher: Walk Behind Trencher	Vermeer	RTX250	RTX250
Vehicle Lift: Mobile - 2 Column, Cabled	ARI-Hetra	LP-10-2-AJ	LP-10-2-AJ
Vehicle Lift: Mobile - 2 Column, Cabled	Stertil Koni	ST1085-1	ST1085-1
Vehicle Lift: Mobile - 2 Column, Cabled	Rotary Lift	MCH214	MCH214
Vehicle Lift: Mobile - 2 Column, Wireless	ARI-Hetra	BPW-10-2-AJ	BPW-10-2-AJ
Vehicle Lift: Mobile - 2 Column, Wireless	Challenger	CLHM-190-2	CLHM-190-2
Vehicle Lift: Mobile - 2 Column, Wireless	Stertil Koni	ST1085-1FRA	ST1085-1FRA
Vehicle Lift: Mobile - 2 Column, Wireless	Rotary Lift	FLEX MAX™ 219	MCHM219
Vehicle Lift: Mobile - 4 Column, Cabled	ARI-Hetra	LP-10-4-AJ	LP-10-4-AJ
Vehicle Lift: Mobile - 4 Column, Cabled	Stertil Koni	ST1085-2FSA	ST1085-2FSA
Vehicle Lift: Mobile - 4 Column, Cabled	Rotary Lift	MCH414	MCH414
Vehicle Lift: Mobile - 4 Column, Wireless	ARI-Hetra	BPW-10-4-AJ	BPW-10-4-AJ
Vehicle Lift: Mobile - 4 Column, Wireless	Challenger	CLHM-190-4	CLHM-190-4
Vehicle Lift: Mobile - 4 Column, Wireless	Stertil Koni	ST1085-2FRA	ST1085-2FRA
Vehicle Lift: Mobile - 6 Column, Cabled	ARI-Hetra	LP-10-6-AJ	LP-10-6-AJ
Vehicle Lift: Mobile - 6 Column, Cabled	Stertil Koni	ST1085-3FSA	ST1085-3FSA
Vehicle Lift: Mobile - 6 Column, Cabled	Rotary Lift	MCH614	MCH614
Vehicle Lift: Mobile - 6 Column, Wireless	ARI-Hetra	BPW-10-6-AJ	BPW-10-6-AJ
Vehicle Lift: Mobile - 6 Column, Wireless	Challenger	CLHM-190-6	CLHM-190-6
Vehicle Lift: Mobile - 6 Column, Wireless	Stertil Koni	ST1085-3FRA	ST1085-3FRA
Vehicle Lift: Mobile - 6 Column, Wireless	Rotary Lift	FLEX MAX™ 619	MCHM619
Vehicle Lift: Mobile - 8 Column, Cabled	Stertil Koni	ST1085-4FSA	ST1085-4FSA
Vehicle Lift: Mobile - 8 Column, Wireless	ARI-Hetra	BPW-10-8-AJ	BPW-10-8-AJ
Vehicle Lift: Mobile - 8 Column, Wireless	Challenger	CLHM-190-8	CLHM-190-8

Vehicle Lift: Mobile - 8 Column, Wireless	Stertil Koni	ST1085-4FRA	ST1085-4FRA
Vehicle Lift: Mobile - 8 Column, Wireless	Rotary Lift	FLEX MAX™ 819	MCHM819
Vehicle Lift: Stationary - 2 Post Asymmetric Stationary Vehicle Lift 10k	Rotary Lift	SPOA10	SPOA10
Vehicle Lift: Stationary - 2 Post Symmetric Stationary Vehicle Lift 12k	Challenger	CL 12-LC	CL 12-LC
Vehicle Lift: Stationary - 2 Post Symmetric Stationary Vehicle Lift 12k	Rotary Lift	SPO12-TA	SPO12-TA
Vehicle Lift: Stationary - 2 Post Symmetric Stationary Vehicle Lift 15k	Challenger	15000-3S	15000-3S
Vehicle Lift: Stationary - 2 Post Symmetric Stationary Vehicle Lift 15k	Rotary Lift	SPO16	SPO16
Vehicle Lift: Stationary - 2 Post Symmetric Stationary Vehicle Lift 18k	Challenger	18000	18000
Vehicle Lift: Stationary - 2 Post Symmetric Stationary Vehicle Lift 18k	Rotary Lift	SPO20	SPO20
Vehicle Lift: Stationary - 2 Post Versymmetric Stationary Vehicle Lift 10k	Challenger	CL10V3	CL10V3
Vehicle Lift: Stationary - 4 Column, Alignment Lift with Front/Rear Jacks and Integrated Turntables and Slip Plates 14k	Challenger	AR4115XAO	AR4115XAO
Vehicle Lift: Stationary - 4 Column, Alignment Lift with Front/Rear Jacks and Integrated Turntables and Slip Plates 14k	Rotary Lift	Alignment Package	SM18

FSA23 -EQU21.0: Equipment New Items			
Item Group	Make	Model	Model Number
All Terrain & Utility Vehicles: All Terrain Vehicles (Quad)	Honda	RANCHER 400 ATV	RANCHER 400 ATV
All Terrain & Utility Vehicles: All Terrain Vehicles (Quad)	Polaris	SPORTSMAN 450 ATV	SPORTSMAN 450 ATV
All Terrain & Utility Vehicles: All Terrain Vehicles (Quad)	Suzuki	KING QUAD 400 ATV	KING QUAD 400 ATV
All Terrain & Utility Vehicles: Electric Utility Vehicles (Side-by-Side)	Greenworks	CU400 Series	CU400W-HD
All Terrain & Utility Vehicles: Electric Utility Vehicles (Side-by-Side)	Greenworks	CU500 Series	CU500-SB
All Terrain & Utility Vehicles: Electric Utility Vehicles (Side-by-Side)	Greenworks	CU800 Series	CU800-SB
All Terrain & Utility Vehicles: Utility Vehicles (Side-by-Side)	American Landmaster	TRAIL CRUISER	TRAIL CRUISER
All Terrain & Utility Vehicles: Utility Vehicles (Side-by-Side)	Honda	PIONEER 500 SIDE X SIDE	PIONEER 500 SIDE X SIDE
All Terrain & Utility Vehicles: Utility Vehicles (Side-by-Side)	Polaris	PRO XD MIDSIZE GAS COMMERCIAL	PRO XD MIDSIZE GAS COMMERCIAL
All Terrain & Utility Vehicles: Utility Vehicles (Side-by-Side)	Polaris	RANGER 570 SIDE X SIDE	RANGER 570 SIDE X SIDE
Bulldozer: 180hp	Case	2050M Dozer	FPT F4HFE613J
Bulldozer: 180hp	Liebherr	PR736	PR736
Bulldozer: 70hp	Case	650M Dozer	FPT F5C F5HFL463D*G003
Bulldozer: 90hp	Case	850M Dozer	FPT F4HFE413P*A008
Compressor: Air Compressor - Trailer Mounted	Chicago Pneumatic	CPS185-100 Trailer Mounted Compressor	CPS185-100 Trailer Mounted Compressor
Dump Truck: Articulating Off Road Dump Truck - 50,000 lbs. Payload	Rokbak	RA30 DumpTruck	RA30 DumpTruck
Dump Truck: Articulating Off Road Dump Truck - 50,000 lbs. Payload	Liebherr	TA230	TA230
Excavator: Hydraulic Excavator - 15,590 lbs. Operating Weight	Case	CX80C Midi Excavator	CX80C
Excavator: Hydraulic Excavator - 15,590 lbs. Operating Weight	Yanmar	V1080-1A	V1080-1A
Excavator: Hydraulic Excavator - 15,590 lbs. Operating Weight	Mecalac	8MCR	8MCR
Excavator: Hydraulic Excavator - 38,000 lbs. Operating Weight	Case	CX170E Excavator	CX170E
Excavator: Hydraulic Excavator - 38,000 lbs. Operating Weight	Bobcat	E165	E165
Excavator: Hydraulic Excavator - 38,000 lbs. Operating Weight	Liebherr	R920	R920
Excavator: Hydraulic Excavator - 76,550 lbs. Operating Weight	Case	CX350D Excavator	CX350D
Excavator: Hydraulic Excavator - 76,550 lbs. Operating Weight	Hitachi	ZX350	ZX350
Excavator: Hydraulic Excavator - 76,550 lbs. Operating Weight	Liebherr	R934	R934
Excavator: Mini Hydraulic Excavator - 7,105 lbs. Operating Weight	Case	CX37C Excavator	CX37C
Excavator: Vacuum Excavator - Trailer Mounted	TruVac	TRXX	TRXX 800
Excavator: Wheeled Hydraulic Excavator - 42,000 lbs. Operating Weight	Liebherr	A920	A920
Forklift: Cushion Tire - 4,000 lbs. Capacity	Clark	S20C	S20C
Forklift: Cushion Tire - 4,000 lbs. Capacity	Hangcha	FP20C	CPYD20-XW71B1-C
Forklift: Cushion Tire - 4,000 lbs. Capacity	Hyundai	25LC-9	25LC-9
Forklift: Rough Terrain Forklift - 5,000 lbs. Operating Weight*	Case	588H	588H
Forklift: Rough Terrain Forklift - 5,000 lbs. Operating Weight*	Harlo	HP5000	HP500
Forklift: Rough Terrain Forklift - 5,000 lbs. Operating Weight*	Master Craft	MC Series	MC-5
Forklift: Rough Terrain Forklift - 5,000 lbs. Operating Weight*	Manitou	M30-4	M30-4
Forklift: Telescopic Tool Carrier/Telehandler	Xtreme	XR843-B	XR843-B
Forklift: Telescopic Tool Carrier/Telehandler	Snorkel	SR9244	SR9244
Forklift: Telescopic Tool Carrier/Telehandler	Snorkel	SR9244	SR9244
Generator: 500kW Mobile	Generac	570KVA	MDE570P
Generator: 500kW Mobile	HiPower	HRVW625T4F*	HRVW625T4F*
Generator: 500kW Mobile	TechnoGen	VO630TSX*	VO630TSX*
Generator: 500kW Mobile	AKSA	ADP-EPA-V550T4	ADP-EPA-V550T4
Generator: 500kW Stationary	AKSA	APD-ULJ500	APD-ULJ500
Generator: 500kW Stationary	IGSA	GSVL20500S*	GSVL20500S*
Generator: 500kW Stationary	Cummins	500DFEK	500DFEK
Generator: 60kW Stationary*	AKSA	APD-ULJ65	APD-ULJ65
Generator: 60kW Stationary*	Blue Star	JD60-02	JD60-02
Generator: 60kW Stationary*	Gillette	SPD-600	SPD-600
Generator: 60kW Stationary*	IGSA	GSJD30060-UL	GSJD30060-UL
Generator: 60kW Stationary*	Blue Star	JD60-02	JD60-02
Generator: 60kW Stationary*	Caterpillar	D60	D60
Generator: 60kW Stationary*	Tradewinds	T60-FS	TP60 T3
Generator: 60kW Stationary*	AKSA	APD-ULJ65	APD-ULJ65
Generator: 60kW Stationary*	Cummins	C60D6C	C60D6C
Generator: 125kW Stationary	IGSA	GSJD30125S*	GSJD30125S*
Generator: 125kW Stationary	Cummins	C125D6D	C125D6D
Generator: 150kW Mobile	Caterpillar	XQ230	XQ230

Generator: 150kW Mobile	AKSA	ADP-EPA-J170T4	ADP-EPA-J170T4
Generator: 150kW Mobile	Blue Star (South Area)	VD150-02FT4MP	VD150-02FT4MP
Generator: 150kW Mobile	HiPower	HRJW190T4F*	HRJW190T4F*
Generator: 150kW Mobile	AKSA	ADP-EPA-J170T4	ADP-EPA-J170T4
Horizontal Directional Drill*	Vermeer	D24X40 S3	D24X40 S3
Leaf Collector: Trailer Mounted*	Bonnell	Spartan	Leaf Pro - Trailer
Leaf Collector: Trailer Mounted*	ODB	DCL800TM	DCL800TM
Lift: Scissor Lift - Self Propelled	Snorkel	S321	S3219E
Lift: Scissor Lift - Self Propelled	Snorkel	ELECTRIC SLAB SCISSOR LIFTS	S3215E/S3219E
Loader: Loader Backhoe - 4x4	Case	580SN Backhoe Loader	580SN
Loader: Skid Steer - 1,850 lbs. Operating Capacity - Wheeled Type	Case	SV185B Skid Steer	SV185B
Loader: Skid Steer - 2,800 lbs. Operating Capacity - Wheeled Type	Case	SV340B Skid Steer Loader	SV340B
Loader: Skid Steer - 2,800 lbs. Operating Capacity - Wheeled Type	ASV	ASV VS-75 Wheeled Skid Steer	VS-75
Loader: Skid Steer - 2,800 lbs. Operating Capacity - Wheeled Type	Manitou	1050RT	1050RT
Loader: Skid Steer - 3,100 lbs. Operating Capacity - Tracked Type	Case	Minotaur	DL550
Loader: Skid Steer - 3,100 lbs. Operating Capacity - Tracked Type	Case	TR30B Compact Track Loader	TR30B
Loader: Skid Steer - 3,100 lbs. Operating Capacity - Tracked Type	ASV	MAX-Series™ VT-100 Posi-Track® loader	VT-100
Loader: Skid Steer - 3,100 lbs. Operating Capacity - Tracked Type	Yanmar	TL100 Tracked Skid Steer	TL100VS
Loader: Skid Steer - 3,100 lbs. Operating Capacity - Tracked Type	Manitou	1050R	1050R
Loader: Wheel Loader - 1.5 cubic yd.	Case	321F Compact Wheel Loader	321F
Loader: Wheel Loader - 1.5 cubic yd.	Mecalac	A Series	AS850
Loader: Wheel Loader - 1.5 cubic yd.	Yanmar	V12	V12
Loader: Wheel Loader - 3.0 cubic yd.	Case	621G Wheel Loader	621G
Loader: Wheel Loader - 3.0 cubic yd.	Liebherr	L526	L526
Loader: Wheel Loader - 5.75 cubic yd.	Case	1021G Wheel Loader	1021G Z Bar
Loader: Wheel Loader - 5.75 cubic yd.	Liebherr	L580	L580
Low Speed Vehicle: Electric Type	GEM	Electric Low Speed Vehicle	Electric Low Speed Vehicle
Low Speed Vehicle: Electric Type	Cruise Car	Icon Electric Powered	C4
Low Speed Vehicle: Electric Type	Star EV	Capella CP-2	CP-2
Motor Grader: Small	Case	836C Motorgrader	836C VHP
Mower: Electric Zero Turn Radius Mower*	Greenworks	Optimus Z Zero Turn	CZ60R18X
Mower: Electric Zero Turn Radius Mower*	Mean Green Electric Mowers	RIVAL 60" SIDE DISCHARGE (6.75-7.25 HRS CONTINUOUS)	RVL60S220
Mower: Remote Controlled Brush Mower	Prinoth	Raptor 100	Raptor 100
Mower: Remote Controlled Brush Mower	AGRIA	9600-112	9600-112
Mower: Remote Controlled Brush Mower	Spider Mowers	2Sg5	2Sg5
Mower: Zero Turn Radius Mower	Bobcat	ZT Series	9996010
Mower: Zero Turn Radius Mower	Encore	Caliber	EC60FX850V5X
Mower: Zero Turn Radius Mower	Encore	Edge	EE60LS2P82F32
Mower: Zero Turn Radius Mower	Encore	Prowler	EP60FX921V5
Mower: Zero Turn Radius Mower	Redmax	CZT Series	CZT60X
Mower: Zero Turn Radius Mower	Hustler	X-One Line (Various Models)	A200
Mower: Zero Turn Radius Mower	STIHL	RZ 760i	RZ 760i
Mower: Zero Turn Radius Mower	Wright	ZXL	950SME
Pallet Jack: Electric 4,400 lbs. Capacity*	Big Joe	LPT44	LPT44
Pallet Jack: Electric 4,400 lbs. Capacity*	Jungheinrich	EJE120	EJE120
Pallet Jack: Electric 4,400 lbs. Capacity*	Mitsubishi	PW23	PW23
Pallet Jack: Electric 4,400 lbs. Capacity*	Big Joe	LPT44	LPT44
Pallet Jack: Electric 4,400 lbs. Capacity*	Jungheinrich	EJE120	EJE120
Pallet Jack: Electric 4,400 lbs. Capacity*	Mitsubishi	PW23	PW23
Pipe Inspection: Battery Operated Pipe Crawler Inspection System*	Envirobot	Viper	Compact
Pipe Inspection: Battery Operated Pipe Crawler Inspection System*	Envirosight	Rover X	RX130 (Option for SAT II,95,400)
Pipe Inspection: Battery Operated Pipe Crawler Inspection System*	Envirosight	Verisight Pro+	VSP200
Pipe Inspection: Battery Operated Pipe Crawler Inspection System*	Aries	UC3410	UC3410
Pipe Inspection: Battery Operated Pipe Crawler Inspection System*	Pipe Trekker	A-200 Pipe Crawler	A-200
Pump: Mobile Pump	Synergy	6" Trash Pump	6" AP-ST-SA-D-T
Pump: Mobile Pump	Genesis	GP150M	GP150M
Pump: Mobile Pump	Sykes	DEUTZ TCD 3.6	2538D
Roadway Advisory Board: Mobile Message Board	All Traffic Solutions, INC	InstAlert 24 - With ATS-5 Trailer & Cloud	4001797FSA
Roadway Advisory Board: Mobile Speed Board	All Traffic Solutions, INC	Shield 12 - with ATS-3 Trailer - No Cloud	4001809FSA
Roadway Advisory Board: Mobile Speed Board	All Traffic Solutions, INC	SpeedAlert 18 - With ATS-3 Trailer - No Cloud	4001811FSA
Roadway Advisory Board: Mobile Speed Board/Automatic License Plate Reader*	ALPR	ALPR Speed Trailer-STANDARD	VSS-STD-SPD-VLT

Roller: Compaction Roller 30,000 lbs. - Single Drum	Case	SV207E Single Drum Vibratory Roller	SV207E
Roller: Compaction Roller 30,000 lbs. - Single Drum	Volvo	SD75B Single Drum Roller	SD75B
Roller: Compaction Roller 30,000 lbs. - Single Drum	Hamm	HC70i Single Drum Vibratory Roller	HC70i
Roller: Large 22,000 lbs. - Double Drum Roller - 70in. Width	Case	DV209D Double Drum Roller	DV209D
Roller: Small 5,400 lbs. - Double Drum Roller - 47in. Width	Case	DV26E Vibratory Tandem Roller	DV26E
Sewer Cleaner: Combination Sewer Cleaning/Vacuum Machine Body - 10 cubic yd.	PipeHunter	VacHunter Combo 121035 PH8C	33315 PH6HX
Sewer Cleaner: Trailer Mounted Sewer Cleaner	Harben	DTK 375 E-180 (Manual)	DTK 375 E-180 (Manual)
Sewer Cleaner: Trailer Mounted Sewer Cleaner	GAPVAX	G7 Jetter	G-Jet
Sewer Cleaner: Trailer Mounted Sewer Cleaner	PipeHunter	700 Gallon Tandem Trailer Jetter	3744
Shop Tools & Equipment*	ARI-HETRA	Brake Hub Removal Jack	WS-18-HR
Shop Tools & Equipment*	ARI-HETRA	Floor Jack	WS-16124
Shop Tools & Equipment*	ARI-HETRA	King Pin Press	WS-KPP143
Shop Tools & Equipment*	ARI-HETRA	On Vehicle Brake Lathe	WS-8L44
Shop Tools & Equipment*	ARI-HETRA	Tire Changer	WS-12645
Shop Tools & Equipment*	ARI-HETRA	Tire Inflation Cage	WS-35026
Shop Tools & Equipment*	ARI-HETRA	Wheel Balancer	WS-12890
Shop Tools & Equipment*	ARI-HETRA	Wheel Dolly	WS-AH20440
Solid Waste Material Handler: Wheeled Type	Hyundai	HW250AMH	HW250AMH
Solid Waste Material Handler: Wheeled Type	Liebherr	LH24M	LH24M
Sweeper: Cabover Mechanical Broom Street Sweeper	Schwarze Industries	M6 Avalanche	M6 Avalanche
Sweeper: Compact Air Sweeper - 2.3 cubic yd.	Dulevo	D3 Sweeper	D3
Sweeper: Compact Air Sweeper - 2.3 cubic yd.	Excelway	B200	B200
Sweeper: Regenerative Air Street Sweeper	Schwarze Industries	A7 Tornado	4045T i
Sweeper: Regenerative Air Street Sweeper	Schwarze Industries	A8 Twister	4045T
Sweeper: Regenerative Air Street Sweeper	Schwarze Industries	A9 Monsoon	4045T
Sweeper: Self-Propelled Hydrostatic Broom	Smith Challenger	SCM400	SCM400
Trailer: Deck Over Equipment Trailer - 40,000 lbs. GVWR*	Talbert	Talbert AC10	Talbert AC10
Trailer: Deck Over Equipment Trailer - 40,000 lbs. GVWR*	EAGER BEAVER	Eager Beaver 20-XPT Trailer	20XPT
Trailer: Deck Over Equipment Trailer - 40,000 lbs. GVWR*	INTERSTATE TRAILERS	40DLA	40DLA
Trailer: Deck Over Equipment Trailer - 40,000 lbs. GVWR*	Big Tex	22PH-20BK+5	22PH-20BK+5
Trailer: Deck Over Equipment Trailer - 40,000 lbs. GVWR*	Texas Trailers	20+5' Deck Over Pintle Hitch Flatbed 23,900 GVWR-	FB2025GV8
Trailer: Detachable Lowboy Trailer 100,000 lbs. GVWR*	INTERSTATE TRAILERS	Interstate 102SDGN Lowboy	102SDGN
Trailer: Detachable Lowboy Trailer 100,000 lbs. GVWR*	EAGER BEAVER	Eager Beaver 50-GSL-3 Lowboy	50-GSL-3
Trailer: Enclosed Cargo Trailer - 7,000 lbs. GVWR	ALCOM	Cargo 7x16	EZEC7x16
Trailer: Enclosed Cargo Trailer - 7,000 lbs. GVWR	Express	ECT7X16TA Enclosed Cargo Trailer	ECT7X16TA
Trailer: Enclosed Utility Body/Trailer Mounted - 9,990 lbs. GVWR*	Knapheide	Enclosed Mobile Work Station	KC132
Trailer: Fixed Neck Lowboy Trailer - 70,000 lbs. GVWR*	Pitts	35-Ton Fixed Neck Lowboy	LB35-33CS
Trailer: Fixed Neck Lowboy Trailer - 70,000 lbs. GVWR*	Pitts	LB35-22DC Hydraulic Detachable Trailer	LB35-22DC
Trailer: Hydraulic Drop Deck Trailer - 13,500 lbs. GVWR*	Air Tow Trailers	UT1410 Utility	UT1410
Trailer: Hydraulic Tail Trailer - 70,000 lbs. GVWR	Talbert	Talbert 35HT	Talbert 35HT
Trailer: Leachate Tanker 6,500 gallons*	MACLTT	Liquid tank trailer	SRX-6500-1-2-NC
Trailer: Livestock Trailer - 7,000 lbs. GVWR*	Delta Trailers	500 Combo	500 Combo
Trailer: Livestock Trailer - 7,000 lbs. GVWR*	Frontier Trailers	14' Livestock Trailer	LIV147
Trailer: Livestock Trailer - 7,000 lbs. GVWR*	Texas Trailers	12' Livestock Trailer	ST1270B
Trailer: Pull Behind Dump Trailer - 14,000 lbs. GVWR	Air Tow Trailers	D3-12 Dump Trailer	D3-12
Trailer: Refrigeration/Freezer Trailer - 7,000 lbs. GVWR*	Polar King Mobile Trailers	16' Mobile Freezer/Refrigeration Trailer 10,000 lbs. GVWR	PKM616
Trailer: Utility/Equipment Trailer - 7,000 lbs. GVWR*	Big Tex	16' Aluminum Utility Trailer	70PI-16
Trailer: Utility/Equipment Trailer - 7,000 lbs. GVWR*	Mission	16' Aluminum Utility Trailer	MLS6.5X16 2.0
Trailer: Utility/Equipment Trailer - 7,000 lbs. GVWR*	Texas Trailers	16' Utility Trailer 7,000 lbs. GVWR	UT61670GV
Underground Locating Equipment: Ground Penetrating Radar*	US Radar	Quantaum Imager	OPLQ5C
Underground Locating Equipment: Utility Locator*	Vermeer	Verifier G-3	G-3

* Indicates new item group



FSA23-EQU21.0: Equipment Terms & Conditions

FLORIDA SHERIFFS ASSOCIATION
Cooperative Purchasing Program
Contract Terms and Conditions

Table of Contents

1.0 GENERAL CONDITIONS.....	5
1.01 BID CORRESPONDENCE	5
1.02 PURPOSE	5
1.03 TERM OF CONTRACT.....	5
1.04 ESTIMATED QUANTITIES.....	5
1.05 SHERIFF AS COUNTY CONSTITUTIONAL OFFICER.....	5
1.06 FUNDING.....	6
1.07 CURRENCY.....	6
1.08 GENERAL DEFINITIONS	6
1.09 ELIGIBLE PURCHASERS OF CONTRACT.....	8
1.10 LEGAL REQUIREMENTS.....	8
1.11 PATENTS & ROYALTIES	9
1.12 FEDERAL AND STATE STANDARDS.....	9
1.13 UNDERWRITERS' LABORATORIES	9
1.14 AMERICANS WITH DISABILITIES ACT	9
1.15 REASONABLE ACCOMMODATION	9
1.16 DISADVANTAGED BUSINESSES	10
1.17 ANTI-DISCRIMINATION	10
1.18 BEST COMMERCIAL PRACTICES	10
1.19 PUBLIC ENTITY CRIMES (PEC)	10
1.20 TAX EXEMPTION	10
1.21 ORDER OF PRECEDENCE IN THE EVENT OF CONFLICT	11
1.22 COMMUNICATIONS.....	11
1.23 CLARIFICATION AND ADDENDA.....	11
1.24 SIGNED BID CONSIDERED AN OFFER.....	12
1.25 ASSIGNMENT OF CONTRACT	12
1.26 TERMINATION OF PRODUCT LINE	12
1.27 METHOD OF AWARD	12
1.28 DEMONSTRATION OF COMPETENCY.....	12

FLORIDA SHERIFFS ASSOCIATION
Cooperative Purchasing Program
Contract Terms and Conditions

1.29	VENDOR ABILITY TO PERFORM	13
1.30	FINANCIAL RESPONSIBILITY	13
1.31	QUALITY AND SAFETY	14
1.32	NONCONFORMANCE	14
1.33	GRATUITIES	14
1.34	TIE BIDS	14
1.35	RIGHT TO AUDIT	14
1.36	LICENSES AND PERMITS	15
1.37	BID AND PERFORMANCE BONDS	15
1.38	ELIMINATION FROM CONSIDERATION	16
1.39	COLLUSION	16
1.40	DEFAULT	16
1.41	PROTESTS AND ARBITRATION	16
1.42	NONPERFORMANCE	17
1.43	SEVERABILITY	18
1.44	TERMINATION FOR CAUSE	18
1.45	TERMINATION WITHOUT CAUSE	19
1.46	CONTRACT ADVERTISEMENT AND USE OF FSA LOGO	19
2.0	BIDDER INSTRUCTIONS	20
2.01	QUALIFICATION	20
2.02	LICENSING AND FACILITIES	20
2.03	INSURANCE AND INDEMNIFICATION	21
2.04	SPECIFICATIONS	22
2.05	SEALED BIDS	23
2.06	MISTAKES	23
2.07	EXCEPTIONS	23
2.08	EQUIVALENTS	23
2.09	MANDATORY PRE-BID MEETING	23
2.10	PRICES QUOTED	24
2.11	PERCENT ABOVE COST	24
2.12	BID SYSTEM DISCOUNT AND PERCENT BELOW MSRP	25

FLORIDA SHERIFFS ASSOCIATION
Cooperative Purchasing Program
Contract Terms and Conditions

2.13	OPTION PRICING	25
2.14	EMERGENCY LIGHTS AND SIRENS.....	25
2.15	BID SUBMISSION.....	26
2.16	ZONE BIDDING	27
2.17	EXECUTION OF BID	27
2.18	MODIFICATION OR WITHDRAWALS OF BIDS	28
2.19	LATE BIDS.....	28
2.20	BID OPENING	28
2.21	DETERMINATION OF RESPONSIVENESS	28
2.22	RESPONSIBLE BIDDER CRITERIA.....	28
2.23	BASIS FOR AWARD.....	29
2.24	PURSUIT, ADMINISTRATIVE AND OTHER VEHICLES METHOD OF AWARD	29
2.25	BID TABULATIONS.....	29
2.26	MINOR IRREGULARITIES/RIGHT TO REJECT.....	30
2.27	CONE OF SILENCE	30
3.0	CONTRACT CONDITIONS.....	31
3.01	GENERAL REQUIREMENTS.....	31
3.02	STATEMENT OF AUTHORITY	31
3.03	VENDOR CONTACT INFORMATION	31
3.04	ADDITIONS OR DELETIONS	31
3.05	CONTRACT EXTENSION.....	31
3.06	PRICE ADJUSTMENT.....	32
3.07	CONDITIONS	32
3.08	PRODUCTION CUTOFF	32
3.09	FACILITIES	33
3.10	PURSUIT RATED VEHICLES & MOTORCYCLES	33
3.11	SPECIAL SERVICE VEHICLES.....	33
3.12	CAB AND CHASSIS PURCHASES.....	33
3.13	FACTORY-INSTALLED OPTIONS.....	33
3.14	VENDOR-INSTALLED OPTIONS.....	34
3.15	NON-SCHEDULED OPTIONS	34

FLORIDA SHERIFFS ASSOCIATION
Cooperative Purchasing Program
Contract Terms and Conditions

3.16 FORCE MAJEURE 34

3.17 ORDER..... 34

3.18 REGISTRATION, TAG, AND TITLE..... 35

3.19 DELIVERY 35

3.20 INSPECTION AND ACCEPTANCE..... 36

3.21 INVOICING AND PAYMENTS 36

3.22 WARRANTY 36

3.23 PURCHASE ORDERS..... 36

3.24 QUARTERLY REPORTS 37

3.25 ADMINISTRATIVE FEE 37

3.26 LIQUIDATED DAMAGES 38

Appendix A: Zone Map..... 40

Appendix B. Bid Calendars 41

Appendix C: ACH Payments 43

Appendix D: Federal Clauses..... 44

FLORIDA SHERIFFS ASSOCIATION
Cooperative Purchasing Program
Contract Terms and Conditions

1.0 GENERAL CONDITIONS

1.01 BID CORRESPONDENCE

All correspondence regarding this bid should be directed to the Florida Sheriffs Association, "FSA". Please be sure to reference the bid number and title, and provide your contact information. Communication for this Invitation to Bid should be identified by contract number and title and directed to:

Florida Sheriffs Association
Attn: Cooperative Purchasing Program Coordinator
2617 Mahan Drive
Tallahassee, FL 32308
E-mail: CPP@flsheriffs.org

1.02 PURPOSE

The Florida Sheriffs Association invites interested bidders, including manufacturers and dealers or authorized representatives to submit responses in accordance with these solicitation documents. The FSA Cooperative Purchasing Program will conduct the solicitation process and administer the resulting contract. The purpose of this bid is to establish contracts with manufacturers and manufacturer's authorized dealers for contract terms specified under Section 1.03 for the purchase of items on a "no trade-in basis."

1.03 TERM OF CONTRACT

The term for Contracts FSA23-VEL31.0 Pursuit, Administrative and Other Vehicles and FSA23-VEH21.0 Heavy Trucks and Buses shall remain in effect for one year from date of contract execution by the FSA, and may be extended by mutual agreement, at the sole option and discretion of the FSA. The initial term of these contracts begins October 1, 2023, and ends September 30, 2024.

The term for Contracts FSA23-EQU21.0 Equipment shall remain in effect for two years from date of contract execution by the FSA, and may be extended by mutual agreement, at the sole option and discretion of the FSA. The initial term of these contracts begins October 1, 2023, and ends September 30, 2025.

Contract extensions will only be executed when the FSA determines, based on then-existing conditions, that it is in the best interest of the FSA and the purchasers to do so.

1.04 ESTIMATED QUANTITIES

Quantities for items depend on many factors, including the vendor's marketing efforts, established business with eligible purchasers and products awarded. Quantities provided do not guarantee or imply future contract sales. Neither the FSA nor any eligible user is obligated to place any order for a given amount subsequent to the award of this bid solicitation.

1.05 SHERIFF AS COUNTY CONSTITUTIONAL OFFICER

FLORIDA SHERIFFS ASSOCIATION

Cooperative Purchasing Program

Contract Terms and Conditions

The Offices of the Sheriff in the State of Florida are constitutional offices of the State of Florida. Each has the authority either individually or collectively to execute contracts for all goods and services for the proper conduct of that office. Section 30.53, Florida Statutes, exempts the sheriffs' offices from the provisions of the Florida Statute that would otherwise require sealed and competitive bidding procedures.

The Office of the Sheriff is not required by law to accept the lowest priced proposal and may reject any or all of the proposals without recourse. Bidders are solely responsible for their own bid preparation costs and nothing in this solicitation in any way obligates the participating sheriffs' offices for any payment for any activity or costs incurred by any bidder in responding to this solicitation.

1.06 FUNDING

In the case of certain purchasers, including state agencies, funds expended for the purposes of the contract must be appropriated by the Florida Legislature, the individual participating agency or the agency's appropriating authority for each fiscal year included within the contract period. For such agencies, their performances and obligations to pay for products or services under any resulting contract, or purchase order, are contingent upon such an annual appropriation by the Legislature, individual agency or by the appropriating authority. Therefore, any contract or purchase order with such an agency shall automatically terminate without penalty or termination costs in the event of non-appropriation.

1.07 CURRENCY

All transaction amounts, bids, quotes, provisions, payments or any part of this contract relating to currency are to be made in United States Dollar.

1.08 GENERAL DEFINITIONS

The terms used in this contract are defined as the following:

- A. **Base Specification:** Written descriptions of the minimum requirements for each item or item group developed by the FSA for bidders to bid on. These item requirements may be unique to FSA and require additional components to the manufacturer's standard item.
- B. **Bidder:** A bidder or enterprise that submits a formal bid to the FSA Cooperative Purchasing Program in accordance with the FSA CPP Terms and Conditions. A bidder, that is not the manufacturer, must be authorized by the manufacturer to market and sell an item for which they are bidding.
- C. **Bid System:** The online forum used for the submission of bids and review of bid results for the specifications connected to this Invitation to Bid. VendorLink is the software used for this bid.
- D. **Build sheet:** A document from the bidder that confirms that the item submitted by bidders meets or exceeds the FSA base specification. Build sheets include, but are not limited to, the factory options list and door data plate info for vehicles that include details such as engine size and transmission, paint codes, production date, axle code, etc.
- E. **Dealer:** An enterprise authorized by the manufacturer to market, sell, provide, and service the items for the FSA Cooperative Purchasing Program. Dealers may be vendor-owned and controlled, in whole or in part, or independently owned and controlled.

FLORIDA SHERIFFS ASSOCIATION
Cooperative Purchasing Program
Contract Terms and Conditions

- F. **Factory Option:** A manufacturer's new and unused optional component, feature, or configuration not specified by the Item Group Specification as standard on the Base Item and which is intended for the specific item or model.
- G. **Florida Sheriffs Association Cooperative Purchasing Program (FSA):** The entity that administers the Invitation to Bid and contract administration functions for this contract.
- H. **End User:** A term used to distinguish the person who ultimately uses or is intended to use a product or for whom a product is designed for use.
- I. **Factory:** Refers to the manufacturer produced products.
- J. **Fleet Advisory Committee (committee):** An employee of a sheriff's office or other local governmental agency, or person who FSA identifies as subject matter expert who assists with the development of bid specifications and evaluation of bid responses. The committee makes recommendations to the FSA and is not responsible for final awards.
- K. **Invitation to Bid:** A competitive solicitation and award process established through the issuance of an invitation to bidders, vendors, dealers and manufacturers to submit a price offer on a specific product to be provided. This term shall include the bid specifications available to bidders on the bid system and references to solicitation documents. The term shall not include request for proposals, request for quotes, request for letters of interest, or the solicitation of purchase orders based on oral or written quotations.
- L. **Manufacturer:** The original producer or provider of items offered on this contract.
- M. **Manufacturer's Suggested Retail Price (MSRP):** Manufacturer's Suggested Retail Price (MSRP) represents the Manufacturer's recommended retail selling price, list price, published list price, or other usual and customary price that would be paid by the purchaser. The following are acceptable sources of current MSRPs and MSRP Lists for use in submission of the bid solicitation and the resulting contract:
 - a. Manufacturer's Computer Printouts
 - b. Chrome Systems, Inc.'s PC Carbook Plus and PC Carbook Fleet Edition
 - c. Manufacturer's Annual U.S. Price Book
 - d. Manufacturer's official website
- N. **Non-Scheduled Option:** Any optional new or unused component, feature or configuration that is not included or listed in the base specifications or options provided by the vendor. Nonscheduled options are available for purchase on the contract and must follow the contract terms and conditions and must be at cost plus or a discount off published list price or MSRP.
- O. **Production Cutoff:** A date used by manufacturers to notify vendors and dealers that the factory has reached maximum capacity for orders or are discontinuing the production of an item. Vehicle manufacturers use this term when referring to any given model year for production.
- P. **Published List Price:** A standard "quantity of one" price currently available to government and educational purchasers, excluding cooperative or volume discounts.
- Q. **Purchaser:** A purchaser is an entity that seeks to obtain items awarded on this contract by meeting the eligible user criteria or with vendor approval.

FLORIDA SHERIFFS ASSOCIATION

Cooperative Purchasing Program

Contract Terms and Conditions

- R. Purchase Order: A request for order from a purchaser to an awarded vendor for an item that has been awarded on this contract. Purchase orders placed using this contract formalize the terms and conditions of this contract under which a vendor furnishes items to a purchaser.
- S. Qualification Packet: This document contains the required forms, attestations, authorizations, and organizational information needed by bidders to submit a successful and complete bid.
- T. Terms & Conditions: This document serves as the governing contract for the identified FSA contract and bid. Standard regulations, processes, procedures, and compliance requirements are identified herein. Bidders complete a qualification packet during the bid process indicating they agree to comply with the Terms & Conditions, and that this will serve as a contract for both parties.
- U. Third Party Supplier: Businesses external to a bidder or vendor that provide products and services which contribute to the overall finished item in this contract. Third Party Suppliers are contractors under the direction and responsibility of the bidder or vendor.
- V. Vendor: The bidder that has been awarded, who agrees to provide the contract items that meet the requirements and base specifications of the contract. The vendor must agree to the contract terms and conditions, which will serve as the governing contract. If the vendor is not the manufacturer, the vendor must be authorized by the manufacturer to market, sell, provide, and service for an awarded item.
- W. Vendor Installed: A product or service provided by the vendor or other third party; not the factory.

1.09 ELIGIBLE PURCHASERS OF CONTRACT

Awarded bids, or contract prices, will be extended and guaranteed to the Florida Sheriffs Association, any unit of local government, political subdivision or agency of the State of Florida. This includes, but is not limited to counties, municipalities, sheriffs' offices, clerks, property appraisers, tax collectors, supervisors of elections, school boards or districts, water management districts, other special districts, police and fire departments, emergency response units, state universities and colleges, or other state, local or regional government entities within the State of Florida. Eligible purchaser also includes all Eligible Users as defined in F.A.C. 60A-1.001(2).

All purchasers are bound by state law, local ordinances, rules and regulations for purchases made under this contract. Participating agencies cannot guarantee any order other than those ordered by the individual agency.

In addition, bids can be extended and guaranteed to other entities approved by manufacturers to participate in this contract, which can include out-of-state sales. Vendors that wish to extend contract pricing to entities other than those defined here are governed by their manufacturer's agreement and must agree to the terms and conditions of this contract.

1.10 LEGAL REQUIREMENTS

Federal, State, and local laws, ordinances, rules and regulations that in any manner affect the items covered herein apply. Lack of knowledge by the bidder of applicable legal requirements will in no way be a cause for relief from responsibility.

Bidders have the option to certify and agree to comply with federal regulations allowing for the acceptance of federal grant funds. By opting in bidders may be able to accept federal and state grant funds from purchasers. This

FLORIDA SHERIFFS ASSOCIATION

Cooperative Purchasing Program

Contract Terms and Conditions

is not a requirement of the bid or contract. Bidders are not required to opt-in; however, they are required to indicate whether they will opt-in or opt-out of federal compliance. Appendix D outlines federal clauses found to generally apply with the FSA contracts. FSA has taken actions to provide and develop information, materials, and resources for bidders, vendors and purchasers that will assist in the use of federal grant dollars with this contract. It is the responsibility of the purchaser to determine compliance for each vendor, if they wish to use federal grant funds for purchase, or intend to request reimbursements using federal dollars.

See Appendix D for Appendix II to Part 200 - Contract Provisions for Non-Federal Entity Contracts Under Federal Awards for requirements that apply to this contract and to awarded vendors.

1.11 PATENTS & ROYALTIES

The bidder, without exception, shall indemnify and hold harmless the FSA and its employees from liability of any nature or kind, including costs and expenses for, or on account of, any copyrighted, patented, or unpatented invention, process, or article manufactured or used in the performance of the contract, including its use by the FSA or a purchaser.

If the bidder uses any design, device or materials covered by letters, patent, or copyright, it is mutually understood and agreed, without exception, that the bid prices shall include all royalties or costs in any way arising, directly or indirectly, from the use of such design, device, or materials in any way involved in the work.

1.12 FEDERAL AND STATE STANDARDS

It is the intent of FSA that all specifications herein are in full and complete compliance with all federal and State of Florida laws, requirements, and regulations applicable to the type and class of commodities and contractual services being provided.

In addition, any applicable federal or State legal or regulatory requirements that become effective during the term of the contract, regarding the commodities and contractual services' specifications, safety, and environmental requirements shall immediately become a part of the contract. The vendor shall meet or exceed any such requirements of the laws and regulations. If an apparent conflict exists, the vendor shall contact the FSA immediately.

1.13 UNDERWRITERS' LABORATORIES

Unless otherwise stipulated in the bid, all manufactured items and fabricated assemblies shall be Underwriters' Laboratories, or U.L., listed or re-examination listing where such has been established by U.L. for the item(s) offered and furnished.

1.14 AMERICANS WITH DISABILITIES ACT

To request this material in accessible format, sign language interpreters, information on access for persons with disabilities, or any accommodation to review any document or participate in any FSA sponsored proceeding, please contact FSA Human Resources at (850) 877-2165 five business days in advance to initiate your request. TTY users may also call the Florida Relay Service at 711.

1.15 REASONABLE ACCOMMODATION

FLORIDA SHERIFFS ASSOCIATION

Cooperative Purchasing Program

Contract Terms and Conditions

In accordance with the Title II of the Americans with Disabilities Act, any person requiring an accommodation at the Bid opening because of a disability must contact the FSA Human Resources at (850) 877-2165.

1.16 DISADVANTAGED BUSINESSES

As part of the solicitation process FSA makes information available to potentially qualified entities publicly available, and conducts additional outreach to qualified:

- Small businesses,
- Minority-owned small businesses,
- Women-owned small business enterprises, and
- Disadvantaged business enterprises.

FSA takes necessary affirmative steps to assure that minority businesses, women's business enterprises, and labor surplus area firms are used when possible, as recommended by 2 C.F.R. § 200.321. FSA will:

- Evaluate whether small, minority, and women's businesses are potential sources,
- Place those qualified small and minority businesses and women's business enterprises on solicitation lists, and
- Search the Small Business Administration, Minority Business Development Agency, and Labor Surplus Area reports for additional potential sources.

Bidders self-identify in the qualification packet whether they meet the state and federal definitions of a disadvantaged business.

1.17 ANTI-DISCRIMINATION

The bidder certifies that they are in compliance as applicable by federal or state law with the non-discrimination clause contained in Section 202, Executive Order 11246, as amended by Executive Order 11375, relative to equal employment opportunity for all persons without regard to race, color, religion, sex or national origin.

1.18 BEST COMMERCIAL PRACTICES

The apparent silence or omission of any description from the specifications shall be regarded as meaning that only the best commercial practices, size, and design are to be used. All workmanship is to be first quality. All interpretations of this specification shall be upon the basis of this statement.

1.19 PUBLIC ENTITY CRIMES (PEC)

In accordance with the Public Entity Crimes Act, Section 287.133, Florida Statutes, a person or affiliate who has been placed on the convicted vendor list maintained by the State of Florida Department of Management Services following a conviction for public entity crimes may not submit a bid on a contract to provide any goods or services to a public entity, may not submit a bid on a contract with a public entity for the construction or repair of a public building or public work, may not submit bids on leases of real property to public entity, may not be awarded or perform work as a vendor, supplier, sub-vendor, or consultant under a contract with a public entity, and may not transact business with any public entity in excess of the threshold amount provided in Section 287.017, Florida Statutes, for CATEGORY TWO for a period of 36 months from the date of being placed on the convicted vendor list.

1.20 TAX EXEMPTION

FLORIDA SHERIFFS ASSOCIATION

Cooperative Purchasing Program

Contract Terms and Conditions

Purchasers making a purchase pursuant to the awarded bid are generally exempt from Federal Excise and State Sales Tax. It is the responsibility of the vendor to verify that the purchaser is exempt by obtaining the purchaser's Federal Excise and State Taxes and Use Certificate Number.

The Florida Sheriffs Association is a 501(c)3 organization and is exempt from all Federal Excise and State Taxes. State Sales Tax and Use Certificate Number is 85-8012646919C-3.

1.21 ORDER OF PRECEDENCE IN THE EVENT OF CONFLICT

In the event of conflict, the conflict may be resolved in the following order of priority (highest to lowest):

- Addenda to Contract Terms and Conditions, if issued
- Contract Conditions
- Addenda to Bid Specifications, if issued
- Bid Specifications
- Bidder Instructions
- General Conditions

1.22 COMMUNICATIONS

Communications between a bidder, lobbyist or consultant and FSA are limited to matters of process or procedure and shall be made in writing to the FSA CPP Staff.

Bidders should not rely on representations, statements, or explanations other than those made in this bid or in any written addendum to this bid, and no oral representations, statements, or explanations shall be deemed to bind the FSA or eligible users.

1.23 CLARIFICATION AND ADDENDA

Any questions or clarifications concerning the Invitation to Bid shall be submitted to FSA by e-mail to CPP@flsheriffs.org with the bid title and number referenced on all correspondence. Final questions must be received by the date for Request for Clarification stated on the Bid Calendar. Questions and answers will be posted to the FSA Cooperative Purchasing Program website on the date indicated on the Bid Calendar. Questions received during the cone of silence date listed on the bid calendar will not be addressed, except as provided herein.

Interpretation of the specifications or any solicitation documents will **not** be made to the bidder verbally, and if any verbal clarifications are provided they are without legal effect. FSA will make every attempt to e-mail updates to registered bidders. However, posting to the FSA website or the bid system constitutes proper notice of addenda.

The FSA shall issue a Formal Addendum if substantial changes which impact the submission of bids are required. Any such addenda shall be binding on the bidder and shall become a part of the solicitation document. In the event of conflict with the original specifications, addenda shall govern to the extent specified. Subsequent Addenda shall govern over prior Addenda only to the extent specified. The FSA will not be responsible for any explanation or interpretation made verbally or in writing except those made through the posting of a Formal Addendum.

The bid submission constitutes acknowledgment of addenda to the specifications. Bids that fail to account for the specification addenda shall be determined to be nonresponsive; however, the FSA may waive this requirement in its best interest.

FLORIDA SHERIFFS ASSOCIATION

Cooperative Purchasing Program

Contract Terms and Conditions

After the start of the contract term, FSA will notify all vendors of any addenda and will require acknowledgement of the new terms and conditions. If the vendor does not agree to the new terms and conditions, the vendor's award can be removed or replaced by another vendor or qualified responsive bidder.

1.24 SIGNED BID CONSIDERED AN OFFER

The signed bid shall be considered an offer on the part of the bidder, which offer shall be deemed accepted upon approval by the FSA. The bid submission must be signed by an authorized representative. Submission of a bid in the FSA bid system constitutes a signed bid for purposes of bid evaluation. An electronic signature may be used and shall have the same force and effect as a written signature.

1.25 ASSIGNMENT OF CONTRACT

No right or interest in this contract may be assigned, transferred, conveyed, sublet or otherwise disposed of, without prior written consent of the FSA.

If the original vendor sells or transfers all assets or the entire portion of the assets used to perform this contract, a successor-in-interest must perform all obligations under this contract. FSA reserves the right to reject the acquiring entity as vendor. A change of name agreement will not change the contractual obligations of the vendor.

In the event a manufacturer reassigns the product line to an alternate company, the vendor is required to immediately notify the FSA in writing of the change within 10 business days confirming the reassignment. If the vendor is not already an approved FSA vendor, the alternate company is required to submit a Qualifications Packet to the FSA to become an approved vendor prior to conducting any qualified sales. FSA may approve such assignments of existing or new vendors at its discretion. The vendor is required to honor the contract pricing and all of the applicable terms and conditions throughout the remaining term of the contract.

1.26 TERMINATION OF PRODUCT LINE

If a vendor terminates a product line (manufacturer or brand), the vendor is required to notify the FSA within 10 business days of the decision not to retain the product line. FSA may remove the terminated products from the contract.

1.27 METHOD OF AWARD

The award is made to responsive and responsible bidders. FSA uses its discretion in determining if bids meet the requirements of this solicitation. The FSA reserves the right to make multiple awards for each item, if deemed in the best interest of the FSA and the purchasers. Awards will be posted on the FSA website according to the date posted in the bid calendar.

1.28 DEMONSTRATION OF COMPETENCY

Bidders must be able to demonstrate a good record of performance for a reasonable period of time, and have sufficient financial support, equipment and organization to ensure they can satisfactorily execute the services if awarded a contract under the terms and conditions herein stated.

FLORIDA SHERIFFS ASSOCIATION

Cooperative Purchasing Program

Contract Terms and Conditions

The terms "equipment" and "organization" as used herein shall be construed to mean a fully equipped and well-established company in line with the best business practices in the industry and as determined by the FSA.

The FSA may consider any evidence available and may require submission of supporting documentation regarding the financial, technical and other qualifications and abilities of a bidder, including past performance with the FSA in making the award.

Pre-award inspection of the bidder's facility may be made prior to the award of contract. Bids will only be considered from firms which are regularly engaged in the business of providing the goods or services as described in this bid.

Information submitted in the bid may not be plagiarized and, except in the case of materials quoted from this solicitation or developed by the manufacturer, must be the original work of the individual or company that submits the bid for evaluation.

1.29 VENDOR ABILITY TO PERFORM

The FSA may require bidders to show proof that they have been designated as authorized representatives of a manufacturer or supplier which is the actual source of supply. In these instances, the FSA may also require information from the source of supply regarding the quality, packaging and characteristics of the products. Any conflicts between this material information provided by the source of supply and the information contained in the bid submission may render the bid nonresponsive.

During the contract period, FSA may review the vendor's record of performance and may require submission of supporting documentation to ensure that the vendor is providing sufficient financial support, equipment and organization.

If the FSA determines that the vendor no longer possesses the financial support, equipment and organization in order to comply with this section, FSA has the authority to immediately terminate the contract awarded.

By responding to this procurement, the vendor warrants that, to the best of his or her knowledge, there is no pending or threatened action, proceeding, or investigation, or any other legal or financial condition, that would in any way prohibit, restrain, or diminish the vendor's ability to satisfy the obligations of the contract. The vendor warrants that neither it nor any affiliate is currently on the convicted vendor list maintained pursuant to section 287.133 of the Florida Statutes, or on any similar list maintained by any other state or the federal government. The vendor shall immediately notify the FSA and purchaser in writing if its ability to perform is compromised in any manner during the term of the contract.

1.30 FINANCIAL RESPONSIBILITY

Bidder affirms by the submission of the bid and by signature on the contract signature form that the bidder:

- Has fully read and understands the scope, nature, and quality of work to be performed or the services to be rendered under this bid and has adequate facilities and personnel to fulfill such requirements.
- Accepts the financial responsibility associated with this bid and declares that they have the access to capital (in the form of liquidity or credit lines) in order to meet the financial demands of such award.
- Has assessed the financial responsibility required to serve the contract as bid, including such details as the obligations to perform all items bid, zones bid, and quantities that could be ordered, as well as timing of payment from purchasers, which can be 45 calendar days from receipt of invoice.

FLORIDA SHERIFFS ASSOCIATION
Cooperative Purchasing Program
Contract Terms and Conditions

1.31 QUALITY AND SAFETY

All materials used for the manufacture or construction of any supplies, materials or equipment covered by this bid shall be new. The items bid must be new, the latest model, of the best quality, and highest-grade workmanship that meet or exceed federal safety standards.

Items requiring certification should require certification of options in cases where non-certified options could result in the decertification of the original product or warranty. In all cases where options are not certified, the vendor must disclose to the end user that the non-certified options are not required to be certified. All options must meet or exceed federal safety standards.

1.32 NONCONFORMANCE

Items may be tested for conformance with specifications. Items delivered that do not conform to specifications may be rejected and returned at the vendor's expense. Items not meeting the specifications and items not delivered within a reasonable period of time after expected delivery date may be purchased outside of the FSA contract.

Any violation of these stipulations may also result in:

- Vendor's name being removed from the awarded vendor list.
- FSA and purchasers being advised not to do business with vendor.

1.33 GRATUITIES

Bidders shall not offer any gratuities, favors, or anything of monetary value to any official, employee, or agent of the FSA, for the purpose of influencing consideration of this bid. Bidders shall disclose in writing any conflicts of interest to FSA prior to any award, or as soon as practical after learning of any such conflict, including any contractual or employment relationships with FSA or potential purchasers of bidders' products or services.

1.34 TIE BIDS

FSA has the right to award multiple bidders the primary or alternate award in the event of a tie. In the event the FSA desires to break tie bids, and businesses have qualifying drug-free work programs, the award will be made using the following criteria:

- Bidder within the State of Florida
- Vendors performance record with purchasers
- Coin Toss

1.35 RIGHT TO AUDIT

Vendor shall establish and maintain a reasonable accounting system that enables FSA to readily identify vendor's sales. FSA and its authorized representatives shall have the right to audit and to make copies of all related records pertaining to this contract, including all government sales and eligible users information whether kept by or under the control of the vendor, including, but not limited to those kept by its employees, agents, assigns, successors, sub-vendors, or third-party suppliers in whatever form they may be kept – written or electronic. Such records shall include, but not be limited to:

FLORIDA SHERIFFS ASSOCIATION

Cooperative Purchasing Program

Contract Terms and Conditions

- Accounting records, including but not limited to purchase orders, confirmation of orders or invoices, paid vouchers, cancelled checks, deposit slips, ledgers, and bank statements
- Written policies and procedures;
- Subcontract files (including proposals of successful and unsuccessful bidders, bid recaps, etc.);
- Original estimates, quotes, or work sheets;
- Contract amendments and change order files;
- Insurance documents; or
- Memoranda or correspondence.

Vendor shall maintain such records during the term of this contract and for a period of three (3) years after the completion of this contract. At the vendor's expense and upon written notice from FSA, the vendor shall provide such records for inspection and audit by FSA or its authorized representatives. Such records shall be made available to FSA during normal business hours within three business days of receipt of the written notice. FSA may select the vendor's place of business or offsite location for the audit. The FSA may also request the vendor provide requested records via e-mail.

Vendor shall ensure FSA has these rights with vendor's employees, agents, assigns, successors, and third-party supplier and the obligations of these rights shall be explicitly included in any subcontracts or agreements formed between the vendor and any sub-vendors to the extent that those subcontracts or agreements relate to fulfillment of the vendor's obligations to FSA.

Professional fees, personnel costs and travel costs incurred by FSA under its authority to audit and not addressed elsewhere will be the responsibility of the FSA. However, if the audit identifies under reporting, overpricing or overcharges (of any nature) by the vendor to FSA or a purchaser in excess of three percent (3%) of the total contract billings, the vendor shall reimburse FSA for the total costs of the audit not to exceed \$5,000. If the audit discovers substantive findings related to fraud, misrepresentation, or non-performance, FSA may recoup all the costs of the audit work from the vendor.

Any adjustments or payments that must be made as a result of any such audit or inspection of the vendor's invoices or records shall be made within a reasonable amount of time (not to exceed 60 calendar days) from presentation of FSA's findings to vendor.

FSA has the right to assess damages or seek reimbursements or refunds based on audit results.

1.36 LICENSES AND PERMITS

The bidder shall obtain and pay for all licenses, permits and inspection fees for this bid submission and contract. Where vendors are required to enter or go onto FSA or purchaser property to deliver materials or perform work or services as a result of a bid award, the vendor will assume the full duty, obligation and expense of obtaining all necessary licenses, permits and insurance.

1.37 BID AND PERFORMANCE BONDS

Bid bonds, when required, shall be submitted with the bid in the amount specified in Bidder Instructions.

Purchasers may request a performance bond from a vendor. Performance bonds are recommended with pre-payment and will be at the expense of the requesting agency. Purchasers should determine the best practice in comparing performance bond expense against any prior discounts that may be available.

FLORIDA SHERIFFS ASSOCIATION
Cooperative Purchasing Program
Contract Terms and Conditions

1.38 ELIMINATION FROM CONSIDERATION

This Invitation to Bid shall not be awarded to any person or bidder who has outstanding debts to the FSA, whether in relation to current or previous bid awards or for other business purposes.

1.39 COLLUSION

Collusion is a non-competitive secret or sometimes illegal agreement between rival bidders that attempts to disrupt the contract process equilibrium. Collusion involves people or companies that would typically compete, but are conspiring or working together in which the outcome results in an unfair bid advantage. The parties may collectively choose to agree to increase or decrease the item base price in one or more zones to maximize awards thus denying purchasers a fair price.

Bidders or vendors who are found to have engaged in collusion will be considered nonresponsive, and will be suspended or barred from bid participation. Any contract award resulting from collusive bidding may be terminated for default. Further, any collusion that is detected by the FSA may be reported to relevant law enforcement and/or prosecutorial agencies.

Bidders may submit multiple bids without conflict of collusion if the bid submitted is not from the same manufacturer and product line. Dealers which share the same ownership may submit multiple bids without conflict of collusion if the bidders are not in the same region featuring the same manufacturer and product line.

1.40 DEFAULT

In case of default on the part of vendor, the FSA may take necessary steps to otherwise procure the products sought, including but not limited to procuring the products or services from the next highest ranked bidder or from other sources. A defaulting vendor may be held liable for costs incurred by the FSA in procuring replacement products.

1.41 PROTESTS AND ARBITRATION

Any person who is adversely affected by the decision or intended decision to award shall file a "Notice of Protest" in writing to the FSA within three (3) business days after the posting of the Intent to Award and shall file a formal written protest within five (5) business days after filing the Notice of Protest. Failure to file both a notice of protest and a formal written protest within the above referenced timelines shall constitute a waiver of proceedings.

The burden is on the party protesting the award of the bid to establish grounds for invalidating the award(s). The formal written protest must state with particularity the facts and law upon which the protest is based. Options are for informational purposes only and will not serve as a basis for protest. Failure to do so will result in a denial of protest. Formal written protest which states with particularity the facts and law upon which the protest is based will be reviewed by FSA legal counsel for legal soundness and validity, and corrective action will be taken as needed contingent upon the validity of such claims. However, any additional time required and cost incurred by the FSA to substantiate a protesting party's claim(s) beyond the normal scope of its legal review due to the vague or inconclusive nature of the protesting party's filing will be reimbursable to the FSA and deducted from the protesting party's bond or security which must accompany their filing.

FLORIDA SHERIFFS ASSOCIATION

Cooperative Purchasing Program

Contract Terms and Conditions

Any bidder who files an action protesting a decision or intended decision pertaining to this contract shall post a bond, cashier's check or money order payable to the Florida Sheriffs Association in the amount equal to ten percent of the item being protested. The bond, cashier's check or money order must be filed at the time of filing the formal written protest or within the five (5) business day period allowed for filing the formal written protest. FSA will provide the amount required within two (2) business days of the notice of protest received. This bond or security will be conditioned upon the payment of all costs which may be adjudged against the protesting party in a court of law and/or to reimburse the FSA for additional legal expenses incurred and required to substantiate the protesting party's claim(s). Failure to post the bond or security requirement within the time allowed for filing will result in a denial of protest. The filing of the protest shall not stay the implementation of the bid award by the Florida Sheriffs Association.

Should the unsuccessful bidder(s) decide to appeal the decision of the FSA, they shall file a notice to FSA within three (3) business days of the FSA bid protest decision regarding their intent to request arbitration. A demand for arbitration with the American Arbitration Association's (AAA) commercial panel under its rules and regulations must be made within ten (10) business days of the FSA bid protest decision. Any person who files for an arbitration with the AAA shall post with the Florida Sheriffs Association at the time of filing the formal written arbitration request, a bond, cashier's check or money order payable to the Florida Sheriffs Association in the amount equal to ten percent of the product line being protested. This amount will be the same amount as the FSA provided at the time of filing the initial protest. Failure to provide written notice to FSA, file a demand for arbitration with the AAA, or failure to post the required bond and security requirement within the specified timelines shall constitute a waiver of arbitration proceedings. By responding to this procurement, the bidder expressly agrees to the use of mandatory binding arbitration to resolve any appeals of the decision of the FSA, and any claims arising from or in any way relating to the procurement process, and expressly waives any and all rights that it may otherwise have to pursue such claims in any other forum, judicial or otherwise.

If the party filing for arbitration does not prevail, it shall pay all costs, legal expenses and attorney fees of the prevailing party incurred in connection with the arbitration. However, if the filing party prevails, the parties shall share equally the fees and expenses of the arbitration and AAA and each shall bear the cost of their own attorney fees. The filing for arbitration shall not stay the implementation of the bid award by the Florida Sheriffs Association.

1.42 NONPERFORMANCE

By virtue of the bid submission, bidder acknowledges its obligation to sell items in all zones for which it is awarded. Failure of the bidder to comply with these requirements may result in the imposition of liquidated damages of up to \$1,000 per item, which amount the vendor agrees is reasonable, or probation, suspension, termination or a combination thereof from current and future bids at the FSA's discretion.

The vendor shall at all times during the contract term remain responsive and responsible. In determining vendor's responsibility, the FSA shall consider all information or evidence that demonstrates the vendor's ability or willingness to fully satisfy the requirements of the solicitation and the contract.

Vendors that are not in compliance with any of the provisions of this contract can be assessed liquidated damages, suspended or terminated from the contract. The FSA at its sole discretion may remove a noncompliant vendor from future competitive bid solicitations; or take other actions including suspension from the contract until compliance issues are resolved, limit current or future vendor participation by items or zones, or other actions as determined by FSA at its sole discretion.

FLORIDA SHERIFFS ASSOCIATION

Cooperative Purchasing Program

Contract Terms and Conditions

At FSA's discretion, vendors may be required to develop corrective action plans to address contract compliance. Failure to abide by corrective action plans will result termination from the existing contract and future competitive bid solicitations at the discretion of the FSA.

In situations where there is evidence that the vendor has engaged in egregious breaches of the contract with respect to either the FSA and/or the purchaser, the contract can be terminated and the vendor will be removed from future solicitations for a period of up to three (3) years, or a permanent ban from the bid process at the sole discretion of FSA.

Specific conditions for termination include, but are not limited to; failure to perform, refusal to accept orders during the contract period while manufacturer orders are still being accepted for current model year or the new year if the vehicle is price protected by the factory, charging amounts exceeding MSRP on factory or vendor installed items and packages, requiring the purchase of additional options over and above the base vehicle as a condition of acceptance of order, providing aftermarket options where factory options are available without the consent of the purchaser, any misrepresentation of optional equipment or service as being factory that fails to meet the definition as described in this document, and any other practice deemed to be inconsistent with the intent of the contract.

Any vendor presented with a valid purchase order consistent with vendor bid quotes or other agreed upon terms and pricing is required by this contract to accept such purchase order and deliver the product. Orders must be fulfilled if the item is a base model or whether it includes options. The vendor must deliver this product if they were awarded the contract – regardless of profit or loss.

Failure to deliver the item may result in the purchaser seeking damages for the difference of cost to issue the exact same order with another vendor plus any legal fees and damages that may be incurred in the process to facilitate a completed order. Additionally, FSA may seek damages for nonpayment of administrative fees, to which FSA is entitled, according to Section 3.28 and any attorney's fees incurred in the recovery of these damages.

1.43 SEVERABILITY

In the event any provision of this contract is held to be unenforceable for any reason, the unenforceability thereof shall not affect the remainder of the contract which shall remain in full force and effect and enforceable in accordance with its terms.

1.44 TERMINATION FOR CAUSE

If through any cause within the reasonable control of the vendor, it shall fail to fulfill in a timely manner, or otherwise violate any of the terms of this contract, the FSA shall have the right to terminate the services remaining to be performed. Written notice of the deficiencies shall be given to the vendor and unless the deficiencies are corrected within 10 business days, the contract may be terminated for cause immediately. The right to exercise the option to terminate for cause shall be in the sole discretion of the FSA, and the failure to exercise such right shall not be deemed to constitute a waiver of this right.

In that event, the FSA shall compensate the successful bidder in accordance with the contract for all services performed by the bidder prior to termination, net of any costs incurred by the FSA as a consequence of the default.

Notwithstanding the above, the vendor shall not be relieved of liability to the FSA for damages sustained by the FSA by virtue of any breach of the contract by the vendor, and the FSA may reasonably withhold payments to the

FLORIDA SHERIFFS ASSOCIATION
Cooperative Purchasing Program
Contract Terms and Conditions

vendor for the purposes of offset until such time as the exact amount of damages due the FSA from the vendor is determined.

1.45 TERMINATION WITHOUT CAUSE

The FSA can terminate the contract in whole or part without cause by giving written notice to the vendor of such termination, which shall become effective 30 calendar days following receipt by vendor of such notice.

In that event, all finished or unfinished documents and other materials shall be properly delivered to the FSA.

The vendor shall not furnish any product after it receives the notice of termination, except as necessary to complete the continued portion of the contract, if any. The vendor shall not be entitled to recover any lost profits that the vendor expected to earn on the balance of the contract or cancellation charges.

Any payments to the vendor shall be only to the total extent of the FSA liability for goods or services delivered prior to the date of notice to terminate the contract.

1.46 CONTRACT ADVERTISEMENT AND USE OF FSA LOGO

The CPP logo is an official logo of the Florida Sheriffs Association designed to promote the program. The logo may be used by vendors in accordance with this policy. Use of the logo is limited to the original version received from the FSA. Modifications are not permitted.

Methods of use include, but are not limited to:

- Electronic mediums such as websites, digital marketing campaigns, social media and e-mail; or
- Print media such as forms, marketing campaigns, business cards, posters, banners, brochures, flyers and postcards.

Vendors may request the logo by contacting cpp@flsheriffs.org, and should include a brief description of how the vendor intends to use the logo. The official FSA sheriff's star and wreath logo may not be used without prior written permission.

FLORIDA SHERIFFS ASSOCIATION
Cooperative Purchasing Program
Contract Terms and Conditions

2.0 BIDDER INSTRUCTIONS

2.01 QUALIFICATION

Bidders are required to complete the qualification packet as part of the bid submission. A bidder becomes a qualified bidder if they comply with this section and Section 2.11, Mandatory Pre-Bid Meeting.

Qualification Packet information required for bid qualification include:

- Qualification form
 - Contact Information
 - Business Profile
 - References
 - Disqualifications & Defaults
 - Warranty Service Plan Attestation
 - Emergency Technician Attestation
- State compliance attestations
 - E-Verify
 - Drug-Free Workplace
 - Workers Compensation
 - Motor Vehicles Dealer License
- Federal compliance attestations
 - Certification Regarding Debarment and Suspension
 - Certification Regarding Lobbying
- Contract Signature Form
- Insurance Checklist
 - Certificates of Insurance due five days prior to award

The qualification packet is located on the bid system.

2.02 LICENSING AND FACILITIES

Bidders are required to possess a Florida Motor Vehicle Dealer's License in order to bid on any motor vehicle.

Bidders must maintain a repair facility within the State of Florida to provide warranty service for the items bid. If bidders do not have a facility, the bidder must be able to assist purchasers in obtaining warranty work as authorized by the manufacturer.

If a bidder does not maintain a facility within the State of Florida, the bidder must have a plan as to how the bidder would service Florida purchasers if awarded the contract. This warranty service plan must demonstrate that the warranty work will be timely and satisfactorily performed and should include:

- Whether the warranty service provider is approved by the manufacturer;
- If the bidder plans to contract out for service, a copy of the service agreement; and
- Zone specific service plans to include:
 - Response time to initial call from purchaser,
 - Number of personnel available to service the contract,
 - Qualifications of personnel providing warranty work, and
 - Any additional information that would detail how warranty service would be provided.

FLORIDA SHERIFFS ASSOCIATION

Cooperative Purchasing Program

Contract Terms and Conditions

The sufficiency of the Warranty Service Plan may be evaluated by the FSA. The FSA reserves the right to request additional information from a bidder regarding the facility during the solicitation and the term of the contract, if awarded. The FSA may also exercise discretion in examining such facility as deemed necessary.

2.03 INSURANCE AND INDEMNIFICATION

Vendor shall be fully liable for the actions of its agents, employees, partners, or third party suppliers and shall fully indemnify, defend, and hold harmless the Florida Sheriffs Association, the participating agencies, and their officers, agents, and employees from suits, actions, damages, and costs of every name and description, including legal counsels' fees, arising from or relating to personal injury and damage to real or personal tangible property alleged to be caused in whole or in part by bidder, its agents, employees, partners, or third party suppliers; provided, however, that the bidder shall not indemnify for that portion of any loss or damages resulting directly from the negligent acts or omissions of the Florida Sheriffs Association and participating agencies or proximately caused by intentional wrongful acts or omissions of the Florida Sheriffs Association and participating agencies.

Vendor's obligations under the above paragraph with respect to legal action are contingent upon the Florida Sheriffs Association and/or participating agencies giving the bidder (1) written notice of any action or threatened action, and (2) the opportunity to take over and settle or defend any such action at bidder's sole expense. Vendor shall not be liable for any cost, expense or compromise incurred by the Florida Sheriffs Association, or participating agencies, in any legal action without bidder's prior written consent, which consent shall not be unreasonably withheld, conditioned, or delayed.

The Insurance Checklist summarizes the bidder's insurance coverage obligations, if awarded. Certificates of Insurance, evidencing such coverages and endorsements as required herein, shall be provided no later than five business days prior to the contract award date. The vendor may not begin performance under the contract until such Certificates have been approved by the FSA.

The certificate must state Bid Number and Title. FSA must be named as an additional insured for the duration of the contract.

The vendor shall maintain comprehensive general liability insurance and general aggregate insurance in the amount and coverage levels specified on the Insurance Checklist.

The vendor shall specifically and distinctly assume, and does so assume, all risks of damage or injury to property or persons used or employed on or in connection with the work and of all damage or injury to any person or property wherever located, resulting from any action or operation under the contract or in connection with the work. It is understood and agreed that at all times the vendor is acting as an independent contractor. The vendor shall be responsible for the work and every part thereof, and for all materials, tools, appliances and property of every description, used in connection with this particular contract. The vendor at all times during the full duration of work under this contract, including extra work in connection with this contract, shall meet the requirements of this section.

The vendor shall maintain automobile liability insurance including property damage covering all owned, non-owned, hired and scheduled automobiles, when used in connection with the delivery or service of this contract.

The vendor shall maintain insurance to cover garage operations in the amount specified on the Insurance Checklist when the garage is used to complete work on this contract.

FLORIDA SHERIFFS ASSOCIATION

Cooperative Purchasing Program

Contract Terms and Conditions

All insurance policies shall be issued by companies authorized to do business under the laws of the State of Florida and these companies must have a rating of B+ or better per the AM Best Rating.

FSA required insurance coverages must be maintained through the duration of the contract. Upon expiration of the required insurance, the vendor must email updated certificates of insurance for as long a period as any work is still in progress. No change or cancellation in insurance shall be made without 30 calendar days written notice to the FSA.

It is understood and agreed that all policies of insurance provided by the vendor are primary coverage to any insurance or self-insurance the FSA possesses that may apply to a loss resulting from the work performed in this contract. All policies issued to cover the insurance requirements herein shall provide full coverage from the first dollar of exposure.

The liability insurance coverage shall extend to and include the following contractual indemnity and hold harmless agreement:

The vendor hereby agrees to indemnify and hold harmless the FSA, a 501(c)3, its officers, agents, and employees from all claims for bodily injuries to the public and for all damages to the property per the insurance requirement under the specifications including costs of investigation, all expenses of litigation, including reasonable legal counsel fees and the cost of appeals arising out of any such claims or suits because of any and all acts of omission or commission of any by the vendor, his agents, servants, or employees, or through the mere existence of the project under contract.

The foregoing indemnity agreement shall apply to any and all claims and suits other than claims and suits arising out of the sole and exclusive negligence of the FSA, its officers, agents, and employees, as determined by a court of competent jurisdiction.

The vendor will notify the insurance agent without delay of the existence of the Hold Harmless Agreement contained within this contract, and furnish a copy of the Hold Harmless Agreement to the insurance agent and carrier.

The vendor will obtain and maintain contractual liability insurance in adequate limits for the sole purpose of protecting the FSA under the Hold Harmless Agreement from any and all claims arising out of this contractual operation.

The vendor will secure and maintain policies of third-party suppliers. All policies shall be made available to the FSA upon demand. Compliance by the vendor and all third-party suppliers with the foregoing requirements as to carrying insurance and furnishing copies of the insurance policies shall not relieve the vendor and all third-party suppliers of their liabilities and obligations under any section or provisions of this contract. Vendor shall be as fully responsible to the FSA for the acts and omissions of the third-party suppliers and of persons employed by them as they are for acts and omissions of persons directly employed by the vendor.

The FSA can request and the vendor shall furnish proof of insurance within seven calendar days of receipt of the written request from FSA. Should the vendor fail to provide acceptable evidence of current insurance during the contract term, the FSA shall have the right to consider the contract breached and justifying the termination thereof. If bidder does not meet the insurance requirements; the FSA may consider alternate insurance coverage.

2.04 SPECIFICATIONS

FLORIDA SHERIFFS ASSOCIATION

Cooperative Purchasing Program

Contract Terms and Conditions

All items covered by this contract and the specifications shall be the manufacturer's current basic production model, and shall, as a minimum, be equipped with all standard factory equipment in accordance with the manufacturer's latest literature unless otherwise noted in the bid system or FSA item group specification. If awarded, bidders must supply an item that either meets or exceeds all the requirements included in the applicable specifications.

The item specifications are contained in the FSA bid system, may be requested from FSA and are retained within FSA's archive. As part of the bid submission, bidders will be required to provide confirmation that the item bid meets the FSA base specification or may have their bid rejected. Failure of a bidder to comply with these provisions will result in bidders being held responsible for all costs required to bring the item into compliance with the contract specifications.

FSA develops the specifications with subject matter experts and publicly available information. However, FSA does not have access to full details from the manufacturer and relies on bidders to assist in this process. Bidders should immediately notify the FSA of any inaccuracies in the specifications. All notifications of inaccuracies must be in writing.

2.05 SEALED BIDS

For purposes of this solicitation, a sealed bid is considered a bid submitted using the FSA bid system.

2.06 MISTAKES

Bidders are expected to examine the item specifications, delivery schedules, bid prices and all information pertaining to servicing this contract before submitting a bid. Failure to do so will be at the bidder's risk.

2.07 EXCEPTIONS

Any requested exceptions, deviations, or contingencies a bidder may have to the terms and conditions must be documented in bidder's submission. Exceptions to the item specifications at the time of the bid submission shall reference the item number, make and model. FSA has the discretion to grant or deny, in whole or in part, the bidders requested exception, deviation or contingency to the specifications or terms and conditions. Bidder acknowledges that if FSA rejects the proposed exceptions, the bid may be disqualified.

2.08 EQUIVALENTS

Prior to the opening of the bid system, bidders may request item equivalents. The bidder must submit the manufacturer name and model number (or product identifier) of each equivalent requested to FSA. Complete, descriptive, technical literature should demonstrate that the equivalent conforms with specification. If a bid uses equivalents without prior approval, the bid may be disqualified.

2.09 MANDATORY PRE-BID MEETING

Prospective bidders are required to attend or participate in the **mandatory** Pre-Bid Meeting. The Pre-Bid Meeting is designed for vendors, the Fleet Advisory Committee and the FSA to clarify questions on the terms and conditions and to confirm all item specifications. Questions relating to the items, specifications, the bid process, or award can be asked at the Pre-Bid Meeting. Bidders have the opportunity to suggest technical modifications or corrections before the item specifications are finalized.

FLORIDA SHERIFFS ASSOCIATION

Cooperative Purchasing Program

Contract Terms and Conditions

FSA reserves the right to grant attendance exceptions to the mandatory meeting if the bidder has requested authorization, signs a memo to agree to meet all the terms and conditions without exception and further waives their right to protest the bid process in its entirety or any portion thereof.

2.10 PRICES QUOTED

Items and options should reflect the most complete price and be below MSRP, and at a minimum should cover the cost of the item or option bid.

Prices quoted in the bid submission should reflect the final amount the bidder can expect to receive for payment for the items bid for the duration of the contract, unless otherwise provided in the contract. Prices submitted as indicated in the sealed bid are final. Bidders acknowledge that prices quoted will be valid for a period of sixty (60) calendar days from the date of bid opening.

Each item, make, and model must be priced and bid separately. Prices must be inclusive of all the components included in the base specification.

Prices bid must include the administrative fee FSA charges to administer the contract, as outlined within these terms and conditions. The administrative fee is three quarters of one percent (.0075).

Prices bid must be above cost, be Free On Board (FOB) destination, and must include delivery to the purchaser.

Upon award, the vendor has the authority to offer additional discounts based on prompt payment, quantity, as well as additional manufacturer or vendor discounts.

2.11 PERCENT ABOVE COST

Due to the changing market conditions, the FSA has temporarily moved to a percent above cost, or cost-plus, model for the Pursuit, Administrative and Other Vehicles Contract. The cost-plus model allows for vendors to sell items immediately when order windows open up for next year's model, when the manufacturer changes price during the contract term, or when new items come to market without the administrative efforts to publish pricing on the FSA contract.

The FSA will use the percent feature of the bid system as the field to capture the percent above cost that the vendor can expect to receive from the purchaser for the purchase of the item. This percent shall include the FSA administrative fee, an estimate of delivery cost to each zone, and vendor profit. Bidders should populate the percent in the bid system with the value the price difference is from the cost to the percent the purchaser will pay for the item.

Cost is defined as the factory invoice price for the item minus the original equipment manufacturer (OEM) government pricing concessions specific to this bid, all manufacturer incentives, discounts, rebates, concessions and holdbacks, and the distribution fee (delivery to vendor).

Prior to issuing the final award, FSA is requesting vendors to provide published pricing for all awarded items during the contract term.

FLORIDA SHERIFFS ASSOCIATION
Cooperative Purchasing Program
Contract Terms and Conditions

2.12 BID SYSTEM DISCOUNT AND PERCENT BELOW MSRP

The bid system allows bidders to provide a percent discount for items bid. The discount field in the bid system does NOT represent any additional discounts purchasers can expect to receive. It represents the percent difference that the price bid is from the MSRP or published list price. This feature is optional for the Heavy Trucks and Buses ITB and for the Equipment ITB.

2.13 OPTION PRICING

FSA requests bidders include most frequently purchased options in the bid system. Option pricing must include the administrative fee. Bidders must provide a price for each option in addition to a percent below MSRP for factory-installed options or a percent above cost for other options.

The FSA has the discretion to disqualify bidders if the option pricing is excessive. In order to determine if pricing is excessive, bidders agree to provide documentation to verify cost at any time during the solicitation process or during the contract term. This information is for comparison purposes and will not be published.

Options are intended to add or delete equipment or features from the base specification. Options can provide an upgrade or downgrade to a manufacturer's model, such as a slightly different engine size or horsepower, and should not be made available for purchase separate from the base item. Bidders shall NOT use options to create an item that is available as another item bid on this ITB. The use of options to facilitate the sale of an alternate manufacturer's product which is outside the scope of the base specification will be determined nonresponsive and the bid will be rejected in whole or part by the FSA. Bidders must disclose which options require the purchase of other options or are dependent on another option in their bid submission. Option pricing will include all costs of labor associated with the option and cost of labor should not be listed separately.

Bidder must use proper manufacturer codes for factory options. Options available through the factory should be bid and supplied to purchaser as factory options, unless otherwise requested in writing by the purchaser. Factory package options are allowable under this contract. Factory package options included in the bid submission must detail what components the package includes.

If a bidder will offer registration and title services as a fee for service, government imposed fees should be listed at the exact cost and shall not include the FSA administrative fee.

If the bidder wishes to offer credit to the purchaser for an option that is standard on the FSA base specification, the bidder should include the word "Credit" at the beginning of the description field, and continue to describe the option being credited. For example, "Credit: one key fob" and enter the price the bidder will credit the purchaser.

For purposes of this bid, Emergency Lights and Sirens will require a separate pricing sheet and option upload in the bid system. Section 2.14 contains specific instructions and exceptions for emergency lights and sirens.

Loose equipment can be bid as an option and made available to purchasers for items originally purchased from this contract.

2.14 EMERGENCY LIGHTS AND SIRENS

Under Florida Statute 316.003(1), authorized emergency vehicles are defined as:

FLORIDA SHERIFFS ASSOCIATION

Cooperative Purchasing Program

Contract Terms and Conditions

“Vehicles of the fire department (fire patrol), police vehicles, and such ambulances and emergency vehicles of municipal departments, public service corporations operated by private corporations, the Fish and Wildlife Conservation Commission, the Department of Environmental Protection, the Department of Health, the Department of Transportation, and the Department of Corrections as are designated or authorized by their respective departments or the chief of police of an incorporated city or any sheriff of any of the various counties.”

Bidders that will provide or contract to provide emergency light and siren installation must only use installers that possess a current Emergency Vehicle Technician Certification, or an approved equivalent. FSA may request certificates for a vendor’s installers at any time during the contract term. Labor may be charged for the installation of emergency lights and sirens. Labor rates must be disclosed as part of the bid submission. Bidders may not charge for labor for vehicles that are manufactured with emergency lights and sirens, including motorcycles. Prices submitted for emergency lights and sirens shall include all applicable government-imposed fees.

Bidders that install emergency lights and sirens are required to provide and install products that are Society of Automotive Engineers (SAE) certified. SAE Certifications must include Class 1, Class 2 and Class 3 in order to be eligible for participation in the contract. If a lighting or siren product installed on an emergency vehicle is not SAE Certified, the vendor can be found in default of the contract.

Bid Submission of Emergency Lights and Sirens

If offering emergency lights and sirens, bidders will be asked to provide pricing by submitting a pricing sheet. An emergency vehicle lights and siren option pricing template is offered in the bid system. Bidders are encouraged, but not required to use the template. If item or specification group is helpful to display light and siren options, bidders may categorize the pricing sheet by item group.

Items listed below are required for the submission of the pricing sheet:

- Order code
- Description
- Price (part only)
- Estimated labor hours
- Labor cost per hour

2.15 BID SUBMISSION

Bidders must submit a bid electronically using the bid system. Bid submissions include a price and a percent variance from MSRP for the base specification for each item bid. Each bidder must submit a qualifications package for each bid. The bid must be received by the date and time specified on the Bid Calendar seen in Appendix B. Failure to meet all submission requirements by the date indicated on the Bid Calendar will result in rejection of the bid.

Bid System: VendorLink

The bid system is located at <https://www.myvendorlink.com>. Bidders are encouraged to participate in training provided. Usernames and passwords will be issued to bidders after registering in the bid system. Contact VendorLink at support@evendorlink.com if technical issues arise during bid submission.

FLORIDA SHERIFFS ASSOCIATION

Cooperative Purchasing Program

Contract Terms and Conditions

Prices are to be rounded to the nearest whole dollar. If a bidder submits bid pricing using cents, the following formula will be applied: \$.01-.49 will be rounded down to the dollar bid (e.g., \$50.49 = \$50) and \$.50-.99 will be rounded to the next dollar (e.g., \$50.50 = \$51).

Bid Submission

To ensure correct bid submittal and formatting, bidders shall:

- Input a bid price for each item by zone.
 - For the Pursuit, Administrative and Other Vehicles ITB, a percent above cost.
- Upload files as instructed in the bid system; files requested will be in Excel or .pdf.
- Follow all instructions outlined in this ITB and provide all requested information.

The bid shall include the following documents:

- Executed Qualifications Packet.
- Build sheet for each item bid as a single .pdf
- Pricing Sheet for Emergency Vehicle Lights and Sirens, if applicable.
- Any requested exceptions or equivalents.

Option Upload

An option sheet should be submitted for each item bid. The bid system will accept option information for each item through a .pdf file upload. Each option sheet should include a header to identify the FSA contract title and number, the bidder name, item number, make and model. Each option sheet should include:

- Option
- Description
- Manufacturer order code or identifying code
- Price
- Cost plus percent for all items not installed at the factory
- Percent below MSRP for factory installed options

FSA may ask awarded bidders to supply one hard copy set with digital signatures and original compliance forms, prior to the contract execution. Hard copy bids should not be submitted unless specifically requested by FSA. FSA is not responsible for bidder's improper use of the bid system. Exceptions will be granted to this section should any bid system malfunctions occur.

2.16 ZONE BIDDING

Bidders may bid in one or more geographic zones. Bidders must submit pricing for each zone they wish to be evaluated. The zone map is included in Appendix A. The geographic zones are in place to assist bidders in estimating costs of delivery, which must be included in the price bid and quoted to the purchaser. For the Pursuit, Administrative and Other Vehicles Contract, the cost of delivery must be included in the percent above cost.

2.17 EXECUTION OF BID

By submitting a response to this Invitation to Bid, the bidder agrees to the terms and conditions of this contract and to be bound by such terms and conditions if selected for award. The bidder must submit the Contract Signature Form with the signature of an authorized representative no later than the bid submittal due date. All terms and conditions are applicable throughout the term of the contract and not specific to any given year, make or model.

FLORIDA SHERIFFS ASSOCIATION
Cooperative Purchasing Program
Contract Terms and Conditions

2.18 MODIFICATION OR WITHDRAWALS OF BIDS

A bidder may submit a modified bid to replace all or any portion of a previously submitted bid until the due date and time of the bid submission listed in the Bid Calendar. Modifications received after the bid due date and time will not be considered.

Bids can be withdrawn in writing prior to the contract award. If a bidder must withdraw the bid, the bidder must contact FSA immediately. Bid withdrawals are handled on a case-by-case basis, and can result in a limitation of participation in future bids.

2.19 LATE BIDS

The responsibility for submitting a bid before the due date and time on the bid calendar is solely and strictly the responsibility of the bidder. The FSA is not responsible for delays caused by technical problems, any internet outages or delays incurred by electronic delivery, or any other occurrence. Any reference to time will be based on Eastern Time.

2.20 BID OPENING

Bids shall be opened on the date and time specified on the Bid Calendar. The bid opening may occur at the Florida Sheriffs Association, 2617 Mahan Drive, Tallahassee, Florida, or may be offered online.

FSA will provide a bid inspection period for bidders following the bid opening. The date, time and duration will be announced prior to the bid opening.

2.21 DETERMINATION OF RESPONSIVENESS

Determination of responsiveness will take place at the time of bid opening and evaluation. In order to be deemed a responsive bidder, the bid must conform in all material respects to the requirements stated in the contract. As set forth in Section 2.26, FSA reserves the right to waive or allow a vendor to correct minor irregularities.

2.22 RESPONSIBLE BIDDER CRITERIA

Bids will be evaluated to determine if qualifications and contract requirements are met. Responses that do not meet all requirements of this Invitation to Bid or fail to provide all required information, documents or materials may be rejected as nonresponsive. The FSA does not consider a bidder's social, political or ideological interests in determining a responsible bidder.

Bidders whose responses, past performance, or current status do not reflect the capability, integrity, or reliability to fully and in good faith perform the requirements of the contract may be rejected as non-responsible. In determining a responsible bidder, the following factors may be considered:

- Adequacy of facilities, staffing, and financial resources;
- Previous experience with FSA contract or other similar government contracts;
- Ability to provide excellent customer service, including previous FSA contracts; and
- Any other information relevant to the responsibility of a vendor that FSA is aware of.

FLORIDA SHERIFFS ASSOCIATION

Cooperative Purchasing Program

Contract Terms and Conditions

In addition to the requirements set forth by these Terms & Conditions, FSA reserves the right to request staffing, performance and financial information from any bidder during the evaluation process.

FSA reserves the right to determine which responses meet the requirements, specifications, terms and conditions of the solicitation, and which bidders are responsive and responsible.

FSA further reserves the right to limit participation of bidders who, in FSA's sole discretion, are determined to present responsibility concerns that call into question the bidder's ability to perform but that do not rise to the level of requiring rejection of the bidder as non-responsible.

2.23 BASIS FOR AWARD

The FSA shall make awards to the lowest price submitted by item and zone to bidders deemed to be responsive and responsible. Awards may also be made to the second and third lowest bidders by item, by manufacturer and by zone, and determined to be in the best interest of the FSA and the purchaser. FSA has the discretion to consider option pricing in making the award.

For the Pursuit, Administrative and Other Vehicles Bid, a percent, rather than a dollar amount, must be provided and will be the determining criteria for the award. the FSA will offer awards to qualified bidders that submit a percent above cost by make and model. Due to the changing market conditions, the FSA has moved to a cost-plus model for this contract, and agrees to work in partnership with awarded vendors by requiring vendors to provide published pricing for all awarded items during the contract term.

Awards will not be given to any parties listed on the government wide exclusion in the System for Award Management.

FSA reserves the right to accept or reject any and all bids, and to waive any minor irregularity, technicality or omission if it determines that doing so will serve the purchaser's best interest.

2.24 PURSUIT, ADMINISTRATIVE AND OTHER VEHICLES METHOD OF AWARD

For the Pursuit, Administrative and Other Vehicles Bid, a percent, rather than a dollar amount, must be provided and will be the determining criteria for the award. The FSA will offer awards to qualified bidders that submit a percent above cost by make and model.

Awards will not be given to any parties listed on the government wide exclusion in the System for Award Management.

FSA reserves the right to accept or reject any and all bids, and to waive any minor irregularity, technicality or omission if it determines that doing so will serve the purchaser's best interest.

2.25 BID TABULATIONS

The Bid Tabulation report will be posted on the FSA Cooperative Purchasing Program website after the bid submission closes.

If there is a delay in posting the bid tabulation results, FSA will post a notice of the delay and a revised date for posting of results.

FLORIDA SHERIFFS ASSOCIATION
Cooperative Purchasing Program
Contract Terms and Conditions

2.26 MINOR IRREGULARITIES/RIGHT TO REJECT

The FSA has the right to accept or reject any and all bids, or separate portions thereof, and to waive any minor irregularity, technicality or omission if the FSA determines that doing so will serve its best interest or the best interest of the purchasers. A minor irregularity is a variation from the terms and conditions of this procurement that does not affect the price of the bid or give the bidder a substantial advantage over other bidders and thereby restrict or stifle competition and does not adversely impact the interests of the FSA or the purchasers. At its option, the FSA may allow a bidder to correct minor irregularities but is under no obligation to do so. In doing so, the FSA may request a bidder to provide clarifying information or additional materials to correct the irregularity. However, the FSA will not request and a bidder may not provide the FSA with additional materials that affect the price of the bid, or give the bidder an advantage or benefit not enjoyed by other bidders.

The FSA may also reject any bids not submitted in the manner specified in this document.

2.27 CONE OF SILENCE

This Invitation to Bid is subject to the Cone of Silence that begins the date the bid submission opens through the intent to award date as indicated in the Bid Calendar. During this period, all communications regarding this solicitation between FSA and Bidder will cease, except for procedural questions, questions regarding problems incurred in the use of the bid system, or communications initiated by the FSA. All permitted communications during this period shall be made in writing to the t contacts identified in Section 1.01 of this ITB.

FLORIDA SHERIFFS ASSOCIATION
Cooperative Purchasing Program
Contract Terms and Conditions

3.0 CONTRACT CONDITIONS

3.01 GENERAL REQUIREMENTS

Once the bid has been awarded, the terms and conditions of this document become the contract between the FSA and the awarded vendor. The terms and conditions apply to all items purchased from this contract.

3.02 STATEMENT OF AUTHORITY

Each person signing the contract warrants that they are duly authorized to do so and binds the respective party to the contract.

3.03 VENDOR CONTACT INFORMATION

The vendor shall maintain current contact information with FSA at all times for sales and submission of purchase orders, quarterly reports and administrative fee payments. If a change occurs during the contract, the vendor must notify FSA immediately.

3.04 ADDITIONS OR DELETIONS

FSA reserves the right to add or delete any items from this bid or resulting contract when deemed to be in the best interest of FSA and purchasers, at its discretion. This decision to take action may be based upon and not limited to few or no sales, product recalls and other safety issues, vendor or manufacturer performance, or the product's lack of relevance.

For items that come to market during the contract term, FSA may authorize qualified and awarded vendors to offer the new item under the existing contract terms and conditions, if the manufacturer authorizes a vendor to sell the item. FSA will request awarded vendors submit pricing and will evaluate the responses prior to authorizing awarded vendors to offer the new item.

3.05 CONTRACT EXTENSION

Contract Extension

The contract may be extended by mutual agreement for up to two (2) additional years, on a year-to-year basis. FSA reserves the right to execute a contract extension or to allow the contract to fully or partially terminate and readvertise for bids, whichever is in the best interest of FSA.

The vendor may request price adjustments for contract extensions as provided for herein. If no request is received from the vendor, the FSA will assume that the vendor has agreed that the optional term may be exercised without a price adjustment. Any adjustment request received after the execution of an extension may not be considered unless otherwise provided for in this contract.

Month-to-Month Continuation

In the event a new contract is not active at the time of this contract's expiration, this contract's terms and conditions shall extend on a month-to-month basis and shall not constitute an implied extension of the contract. Such a month-to-month continuation shall be upon the compensation and payment provided herein.

FLORIDA SHERIFFS ASSOCIATION
Cooperative Purchasing Program
Contract Terms and Conditions

3.06 PRICE ADJUSTMENT

This contract provides the following options for price adjustments:

- Annual Price Adjustments
- Changes to Manufacturer Production or Design
- Manufacturer Certified Adjustments
- Equitable Adjustments

Price adjustment requests must clearly substantiate a need to increase or decrease the price. Price adjustments will not be considered if vendors are delinquent on administrative fee payments or have outstanding quarterly reports.

Annual Price Adjustment

The FSA may consider annual price adjustments due to:

- Changes in the Producer Price Index (PPI) as published by the U.S. Department of Labor, Bureau of Labor Statistics (BLS); or
- As a result of changes to national or state standards that require substantial price adjustments.

FSA may consider other documentation related to the change to national or state standards, but is not obligated to grant price changes without literature from the manufacturer. The FSA will consider the request and will make a final determination on the change in price.

Changes to Manufacturer Production or Design

Significant changes by the manufacturer to the production of and specification design may initiate a price adjustment request. FSA will consider order dates, production factors, model year, or other conditions, as well as the replacement or complete redesign of items. Vendors must provide documentation from the manufacturer.

Manufacturer Certified Adjustments

Vendors must provide documentation from the manufacturer to FSA that shows a legitimate need for price adjustments.

Equitable Adjustments

The FSA may make an equitable adjustment to the contract terms or pricing at its discretion.

3.07 CONDITIONS

It is understood and agreed that any item offered or shipped as a result of this contract shall be the most current model offered.

3.08 PRODUCTION CUTOFF

Vendors shall notify the FSA in writing no less than sixty (60) calendar days prior to the close of final order date by the manufacturer when the final order date is during the term of the contract. Purchase orders received by the vendor ten (10) business days prior to the final order date must be accepted and entered into the order system

FLORIDA SHERIFFS ASSOCIATION

Cooperative Purchasing Program

Contract Terms and Conditions

with the manufacturer. Purchase orders issued and received after the production cutoff date will be subject to availability. In this case, the vendor and manufacturer have the discretion whether to choose to provide next year's model at current year's prices until the end of the contract term. If the manufacturer cutoff date is during the term of the contract and will affect the purchaser's ability to obtain the items, FSA may consider substitutions from the same manufacturer.

3.09 FACILITIES

The FSA reserves the right to inspect the vendor's facilities at any time with prior notice.

3.10 PURSUIT RATED VEHICLES & MOTORCYCLES

Vehicles in this category have been reviewed by one or more of the nationally recognized authorities on Police Vehicle Testing Program/Evaluation. These evaluations are not designed to recommend a particular product, but to serve as a resource for vehicles which are currently being offered for law enforcement service. To see the full detailed report, click or copy the links below. At the time of the bid there were two nationally recognized authorities:

[State of Michigan, Vehicle Test Team of the Michigan State Police \(MSP\) Precision Driving Unit](#)

[Los Angeles County Sheriff's Department Law Enforcement Vehicle Test and Evaluation Program Vehicles:](#)

3.11 SPECIAL SERVICE VEHICLES

Vehicles in this category have been reviewed by one or more of the nationally recognized authorities on pursuit vehicle testing program/evaluation. These vehicles are labeled as Special Service Vehicle (SSV) and often used in public safety applications and other areas of government. Refer to manufacturers published information for detailed information regarding these vehicles.

3.12 CAB AND CHASSIS PURCHASES

Vendors performing upfitting of cab and chassis should be licensed and certified to perform such work. Vendors are responsible for tag and title work if the chassis is completed by the vendor or the vendor's contracted third-party supplier. The requirements of Florida Statute 319.21 related to the manufacturer statement of origin apply to cab and chassis purchases.

Cab and chassis may be purchased from the vendor without any required additional upfitting by the vendor. Vendors are not responsible for tag and title if an incomplete chassis is requested and sold to the purchaser.

3.13 FACTORY-INSTALLED OPTIONS

All options specified as factory-installed are to be installed on the item at the primary site of assembly and is to be the manufacturer's standard assembly-line product. Aftermarket and vendor-installed equipment will not be accepted as factory-installed. Vendors found supplying aftermarket or vendor-installed equipment where factory-installed are specified shall be required to retrieve all delivered items and supply new items meeting the specifications.

FLORIDA SHERIFFS ASSOCIATION

Cooperative Purchasing Program

Contract Terms and Conditions

All factory-ordered options are to be original equipment manufacturer (OEM) and installed at the primary site of assembly unless otherwise noted by the vendor and acknowledged in writing by the purchaser. Verbal agreements will not be recognized.

3.14 VENDOR-INSTALLED OPTIONS

All vendor-installed accessories, equipment, or options shall be installed according to the manufacturer's specifications. All vendor-installed options must be manufactured by an established manufacturer of the product provided. Vendors are required to disclose make and model of product being offered, design, and model must be approved by the purchaser prior to installation. Prior to any purchase, the vendor must also disclose the warranty of any accessory, equipment or option that is less than or exceeds the factory or equipment warranty coverage. Any vendor that violates this provision will be considered in default of the contract. FSA may terminate the contract in accordance with these terms & conditions.

3.15 NON-SCHEDULED OPTIONS

A non-scheduled option is an option not listed on the FSA published award. Vendors may provide non-scheduled options at less than MSRP or the Published List Price. Non-scheduled options should be identified and listed as a separate line item with the price and discount on the purchase order. Non-scheduled options are covered under these terms and conditions.

3.16 FORCE MAJEURE

A vendor shall not be penalized for a delay resulting from the vendor's failure to comply with delivery requirements if neither the fault nor the negligence of the vendor or its employees contributed to the delay and the delay is due directly to acts of God, wars, acts of public enemies, strikes, fires, floods, or other similar cause wholly beyond the vendor's control, or for any of the foregoing that third party suppliers if no alternate source of supply is available to the vendor.

3.17 ORDER

To initiate a purchase, a purchase order must be issued to the vendor, which includes:

- FSA contract title and number;
- FSA item number, and the make and model or item description; and
- Purchaser name, phone number and email address.

The vendor's acceptance of a purchaser's order will indicate that the vendor agrees to deliver an awarded item that will be fully compatible with all of its options. Production schedules and delivery dates should be discussed at the time the quote is provided to the purchaser, or if no quote is provided, when the purchase order is delivered to the vendor. Vendor shall place the order with the manufacturer within 10 business days of receipt of the purchase order. The vendor shall assure that all orders are placed in full compliance with the specifications and the terms and conditions of the contract and the purchase order. Any changes that are required to bring an item into compliance with the various options due to an incorrect order will be accomplished at the vendor's expense.

A Confirmation of Order form shall be completed by the vendor and provided to the purchaser and FSA fifteen (15) calendar days from receipt of purchase order without request by the purchaser. Any additional information needed to complete this form should be obtained by the vendor from the purchaser.

FLORIDA SHERIFFS ASSOCIATION

Cooperative Purchasing Program

Contract Terms and Conditions

While it is recommended that an agency purchase from the zone which is closest to their location, it is not mandatory to do so. If the purchaser determines that a vendor in another zone can better serve the purchaser's needs, the purchaser may order from a vendor in another zone. Vendors that provide awarded items outside of an awarded zone may upon mutual agreement between the vendor and the purchaser charge a delivery fee.

If a vendor receives a purchase order for an item for which they were not awarded, the vendor must notify the purchaser and return the purchase order to the purchaser within three (3) business days.

3.18 REGISTRATION, TAG, AND TITLE

Title items shall be the responsibility of the vendor. If the purchaser is a government agency, the purchaser has the right to choose to register and title the item. Costs of registration, tag and title shall not exceed the statutory rates. FSA administrative fee does not apply to the cost of registration, tag and title.

3.19 DELIVERY

Vendors are to inspect the item to confirm the item meets or exceeds the FSA base specification, manufacturer specification, and purchase order. Deliveries not complying with these requirements may be rejected and will have to be redelivered at vendor's expense.

Delivery shall be within the normal working hours of the user, Monday through Friday, excluding holidays. Delivery schedules shall be agreed to by the purchaser and the vendor. Vendor shall notify the purchaser no less than twenty-four (24) hours prior to delivery of the time and location, which shall reflect the mutually agreed upon delivery details. The vendor shall be responsible for delivering items that are properly serviced, clean and in first class operating condition. Items shall be delivered with each of the following documents completed or included:

1. Copy of the purchase order.
2. Copy of the FSA base specification.
3. Copy of manufacturer's Invoice, price sheet, build sheet or other documentation that verifies what components are included on the item being delivered
4. Copy of the pre-delivery service report
5. Registration warranty certification
6. Owner's manual
7. Registration, tag and title or an application for the registration, as applicable

All items with fuel tanks of thirty-five (35) gallons or less must contain no less than one quarter (1/4) tank of fuel as indicated by the fuel gauge at the time of delivery. For items that have more than thirty-five (35) gallons, a minimum of one eighth (1/8) of a tank of fuel must be provided. T All electric vehicles must be delivered with a minimum charge level of 10 per cent. The purchaser has the option to reject a vehicle with more than 350 odometer miles, or may deduct \$0.51 cents per mile in excess of 350 miles from the invoice, unless distance above 350 miles was previously approved by the purchaser. Deliveries of less than 350 miles may be accomplished by driving the vehicle. Any delivery accomplished by driving the vehicle must be supervised and the driver must comply with manufacturer's break-in requirements and all applicable traffic laws. Any delivery accomplished by driving a pursuit-rated vehicle must use an "OUT OF SERVICE" cover on light bars. Deliveries in excess of 350 miles shall be made by transport, or otherwise approved by the purchaser, however, this requirement shall not apply to incomplete chassis.

FLORIDA SHERIFFS ASSOCIATION

Cooperative Purchasing Program

Contract Terms and Conditions

Items with hour meters must be delivered with fewer than five (5) hours on the hour meter or may be rejected by the purchaser. The purchaser may choose to negotiate a lower purchase price when the item exceeds five (5) hours.

When items require service or adjustments upon delivery, the vendor shall either remedy the defect, or be responsible for reimbursing the manufacturer's local authorized representative or other service provider to remedy the defect. Such service or adjustments shall be initiated by the vendor within 48 hours after notification by a purchaser, not to include weekends and holidays. Delivery will not be considered complete until all services or adjustments are satisfactory, and the item is redelivered or repaired. The cost of any transportation required to address the defect shall be the responsibility of the vendor until the items are satisfactory and accepted by the purchaser.

3.20 INSPECTION AND ACCEPTANCE

Final acceptance shall be given only after the purchaser inspects or confirms the item meets contract specifications. Delivery of an item to a purchaser does not constitute acceptance for the purpose of payment. Inspection and acceptance will be at the purchaser's destination unless otherwise previously agreed upon location was provided in the purchase order. Should the delivered items differ in any respect from the item specifications, payment can be withheld until such time as the vendor completes the necessary corrective action.

3.21 INVOICING AND PAYMENTS

Invoicing and payments shall be the responsibility of the vendor and purchaser placing orders using this contract. Vendors must invoice each purchaser independently. The vendor shall be paid upon submission of invoices to the purchaser after satisfactory delivery and acceptance of the items. While the Local Government Prompt Payment Act applies to ensure timely payment of vendor invoices, the FSA encourages purchasers to make payment within 30 days of acceptance of the item. The Local Government Prompt Payment Act is defined in Sections 218.70–218.79 of Florida Statutes.

3.22 WARRANTY

All warranties shall begin at the time of delivery and final acceptance by the purchaser. The purchaser's warranty should not be active for incomplete items and items delivered to a third-party supplier before final delivery.

3.23 PURCHASE ORDERS

The vendor must submit electronic copies of purchase orders within fifteen (15) calendar days of the purchase order issue date. Emails shall be sent to coop@flsheriffs.org. Purchase orders received by the vendor after this deadline must be submitted to FSA as soon as possible with the date received by the vendor and cause for the delay. Purchase orders should contain the following required information:

- Purchaser name,
- Purchase order number,
- Purchase order issue date,
- FSA contract title and number,
- Item number,
- Item make and model, or item description,
- Item price,
- Options by item, and

FLORIDA SHERIFFS ASSOCIATION

Cooperative Purchasing Program

Contract Terms and Conditions

- Estimated delivery date.

Purchase orders vary in format and information provided. If a purchase order does not include the required information, the vendor must submit supplemental documentation to FSA at the same time the purchase order is due. Such information may be in bid quotes, equipment proposals, confirmation of orders, or other documents. If a purchaser does not use purchase orders, written communication from the purchaser to the vendor will be provided supplied to FSA.

3.24 QUARTERLY REPORTS

Quarterly reports are the contractual responsibility of each vendor. Quarterly reports must be completed and submitted electronically. All quarterly reports shall be sent to reports@flsheriffs.org. The quarterly report template shall be submitted using an Excel workbook provided by FSA. Quarterly reports which do not adhere to the required format or are not complete of all purchase orders received and/or deliveries made during the quarter will be returned to the reporting vendor for correction.

Quarterly reports are due no later than the 15th day of the month following the end of the quarter. Quarterly reports shall follow the schedule below for the duration of the contract. If a contract extension is executed, the quarterly reports will maintain the same schedule for future reporting periods.

Contract Year: October 1, 2023 – September 30, 2024

Year 1 Quarter 1:	October 1 – December 31	Q1 Report Due:	January 15
Year 1 Quarter 2:	January 1 – March 31	Q2 Report Due:	April 15
Year 1 Quarter 3:	April 1 – June 30	Q3 Report Due:	July 15
Year 1 Quarter 4:	July 1 – September 30	Q4 Report Due:	October 15

Quarterly reports must be submitted even if there are no sales or no deliveries in a quarter. If a vendor has no sales within a quarter, the vendor shall indicate "No sales this quarter" on the top row of the sales worksheet. If the vendor has no deliveries in a given quarter, the vendor shall indicate "No deliveries this quarter" on the top row of the delivery worksheet.

FSA reserves the right to modify the procedure for submitting quarterly reports during the term of the contract. Such a change shall not materially modify the substance of the information to be reported, but may change the method by which future quarterly reports are to be submitted. In the event of such a change, FSA will provide written notice to all vendors of the method by which future quarterly reports are to be submitted.

3.25 ADMINISTRATIVE FEE

The FSA charges three quarters of one percent (.0075) to procure, process and administer the contract. The administrative fees are the contractual responsibility of each awarded vendor.

After receipt of payment from contract purchases, the vendor shall remit all administrative fees to the FSA no later than 15 calendar days after the end of each quarter. All fees payable to the FSA during any given quarter will be accompanied and supported by a quarterly report.

The administrative fee will remain payable to FSA and no relief from payment of the administrative fee, nor any additional charge to recoup the administrative fee, will be permitted if a vendor fails to incorporate the

FLORIDA SHERIFFS ASSOCIATION

Cooperative Purchasing Program

Contract Terms and Conditions

administrative fee in its bid pricing. The administrative fee should never be listed as a separate line item on any purchase order or invoice.

The administrative fee is based on the total purchase order amount of new items. This fee excludes any value given to purchasers for trade-ins. Trade-ins, extended warranties and other exchanges will not reduce or impact the fee calculation.

The ACH form for electronic payment or wiring of funds is included in Appendix C. It is the preference of FSA that all payments be electronically paid and submitted. If ACH is not available, checks for the administrative fee can be sent to:

Florida Sheriffs Association
Cooperative Purchasing Program
2617 Mahan Drive
Tallahassee, FL 32308

3.26 LIQUIDATED DAMAGES

The vendor warrants that the item supplied to the purchaser shall conform in all respects to the standards set forth and the failure to comply with this condition will be considered as a breach of contract. Any liquidated damages levied because of inadequacies or failures to comply with these requirements shall be borne solely by the vendor responsible for same.

Failure to submit the administrative fee with accompanying quarterly reports to FSA within 15 calendar days following the end of each quarter may result in the imposition of liquidated damages. Vendors failing to submit administrative fees and/or quarterly reports will incur liquidated damages in the amount of \$25 for each calendar day that fees and reports are past due, beginning on the 16th day following the end of the quarter.

If a civil action is initiated by the FSA to recover administrative fees or liquidated damages as set forth in this section, the prevailing party shall be entitled to its reasonable attorneys' fees and costs incurred in the litigation. The venue shall lie in the Circuit Court for the Second Judicial Circuit in and for Leon County, Florida.

When quarterly reports are late, liquidated damages are to be included in vendor's Quarterly Report and administrative fee submission. Liquidated damages that remain unpaid beyond 45 calendar days can result in FSA, at its sole discretion, implementing contract compliance actions, including but not limited to, suspension, limited participation by specifications or zones, disqualification from future solicitations, or termination for cause pursuant to the Terms & Conditions.

Schedule of Liquidated Damages

Failure to submit quarterly report on time	\$25 per calendar day
Failure to submit administrative fee on time	\$25 per calendar day
Failure to report a Purchase Order to FSA within 15 calendar days of the purchase order issue date	\$100 per Purchase Order
Failure to Report Sales	.0075 of the sales price plus 1.5% each month following the delivery date.

Vendor agrees and acknowledges that its failure to take any of the actions specified in the above schedule will result in liquidated damages to this contract. Vendor agrees and acknowledges that these liquidated damages are

FLORIDA SHERIFFS ASSOCIATION
Cooperative Purchasing Program
Contract Terms and Conditions

not intended to be and do not constitute a penalty and that these amounts are reasonably calculated to compensate the FSA for the damages that it will incur as a result of the vendor's failure to take the specified actions.

DRAFT


FLORIDA SHERIFFS ASSOCIATION

Cooperative Purchasing Program

Contract Terms and Conditions

Appendix A: Zone Map

FSA CONTRACT ZONE MAP

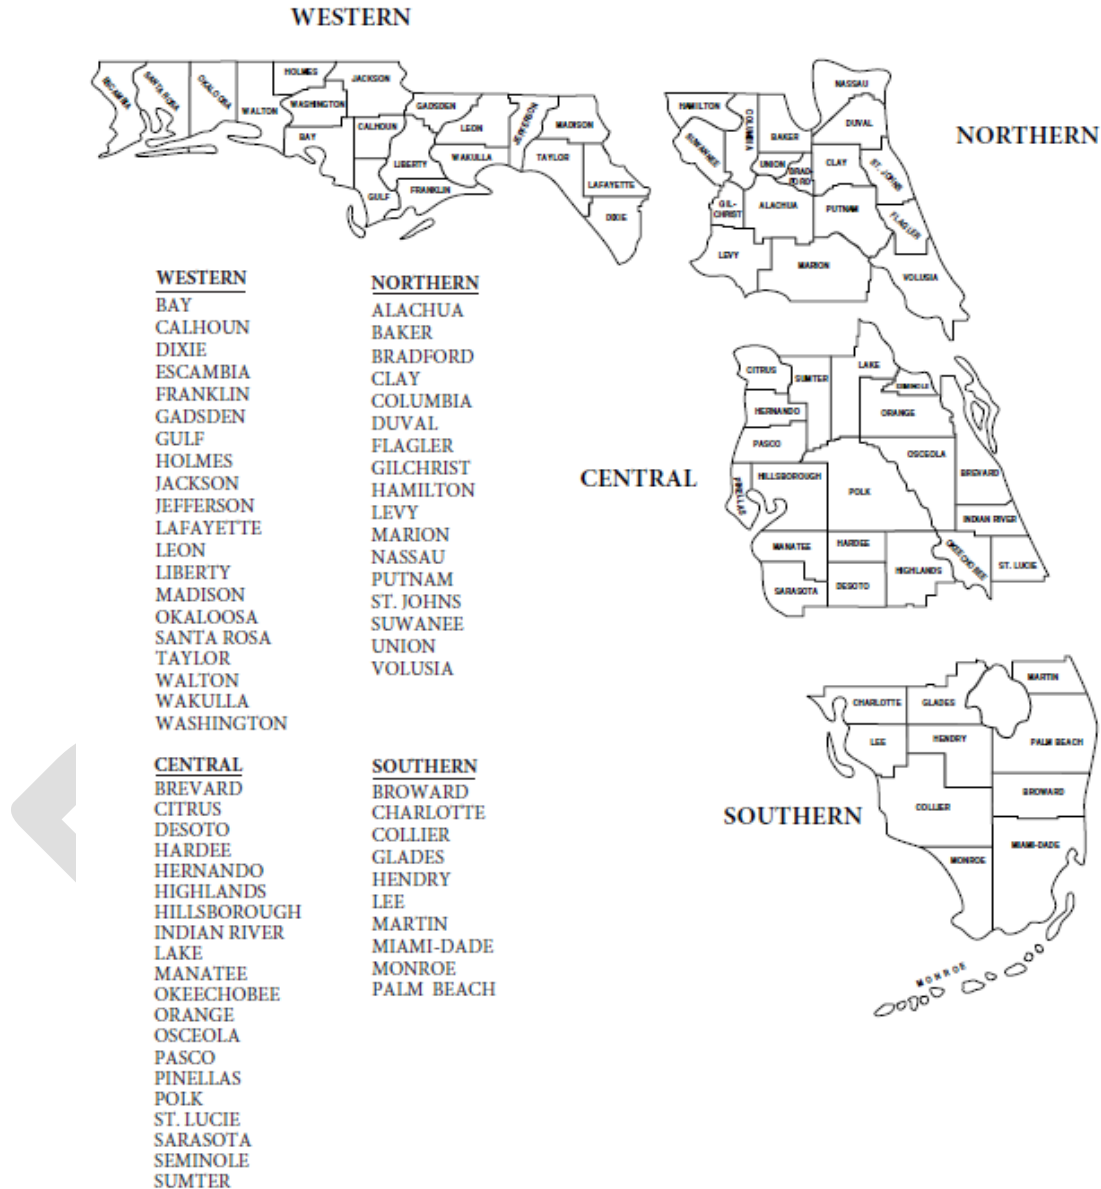

v.10_2015

FLORIDA SHERIFFS ASSOCIATION
Cooperative Purchasing Program
Contract Terms and Conditions

Appendix B. Bid Calendars

FSA23-VEL31.0: Pursuit, Administrative, & Other Vehicles	
Bid Calendar Task	Date
Invitation to Bid Announcement (ITB)	5/1/2023 & 5/15/2023
Voluntary Interested Bidder Workshop	6/13/2023
New Item Specification Requests Due	6/23/2023
Pre-Bid Meeting	7/11/2023
Request for Clarifications Due to FSA	7/18/2023
FSA VendorLink Bidder Training	7/24/2023
Bid System Open	7/25/2023
Cone of Silence	7/25/2023 - 9/11/2023
Bid Submissions Due	8/30/2023
Public Bid Opening	9/1/2023
Bid Tabulations Posted	9/1/2023
Bid Evaluation	9/5/2023 - 9/8/2023
Intent To Award	9/11/2023
Final Award & Effective Date of New Contract	10/1/2023

FSA23-VEH21.0: Heavy Trucks & Buses	
Bid Calendar Task	Date
Invitation to Bid Announcement (ITB)	5/1/2023 & 5/15/2023
Voluntary Interested Bidder Workshop	6/14/2023
New Item Specification Requests Due	6/23/2023
Pre-Bid Meeting	7/12/2023
Request for Clarifications Due to FSA	7/18/2023
FSA VendorLink Bidder Training	7/24/2023
Bid System Open	7/25/2023
Cone of Silence	7/25/2023 - 9/11/2023
Bid Submissions Due	8/30/2023
Public Bid Opening	9/1/2023
Bid Tabulations Posted	9/1/2023
Bid Evaluation	9/5/2023 - 9/8/2023
Intent To Award	9/11/2023
Final Award & Effective Date of New Contract	10/1/2023

FLORIDA SHERIFFS ASSOCIATION
Cooperative Purchasing Program
Contract Terms and Conditions

FSA23-EQU21.0: Equipment	
Bid Calendar Task	Date
Invitation to Bid Announcement (ITB)	5/1/2023 & 5/15/2023
Voluntary Interested Bidder Workshop	6/7/2023-6/8/2023
New Item Specification Requests Due	6/23/2023
Pre-Bid Meeting	7/13/2023
Request for Clarifications Due to FSA	7/18/2023
FSA VendorLink Bidder Training	7/24/2023
Bid System Open	7/25/2023
Cone of Silence	7/25/2023 - 9/11/2023
Bid Submissions Due	8/30/2023
Public Bid Opening	9/1/2023
Bid Tabulations Posted	9/1/2023
Bid Evaluation	9/5/2023 - 9/8/2023
Intent To Award	9/11/2023
Final Award & Effective Date of New Contract	10/1/2023

For the most up to date information, please refer to <https://www.flsheriffs.org/law-enforcement-programs/cooperative-purchasing-program/become-a-vendor>

* Details for the Workshop, Mandatory Pre-Bid Meeting, and Public Bid Openings will be posted on FSA's website, emailed to interested bidders, or can be found in Florida Administrative Register (as appropriate) for the dates published.

FLORIDA SHERIFFS ASSOCIATION
Cooperative Purchasing Program
Contract Terms and Conditions

Appendix C: ACH Payments



Protecting, Leading & Uniting...since 1893

FLORIDA SHERIFFS ASSOCIATION

2617 Mahan Drive, Tallahassee, Florida 32308
P.O. Box 12519 • Tallahassee, Florida 32317-2519

p: (850) 877-2165

f: (850) 878-8665

www.flsheriffs.org



TO: All Customers of the Florida Sheriffs Association

SUBJECT: Florida Sheriffs Association is going paperless!

Our association is pleased to announce the implementation of accepting electronic payments from customers. If your agency or company is able to pay via ACH, please consider adding the Florida Sheriffs Association to your list of vendors paid via electronic payment.

Florida Sheriffs Association's Banking Information is as follows:

Checking Account

Capital City Bank

Routing Number: 063100688

Account Number: 0010867001

Please email any payment remittance information to accounting@flsheriffs.org.

If you choose to make ACH payments to the association, there is no additional charge. However, the information above can be used to pay with a wire transfer. If you choose to pay via wire, there is a charge of \$25 per wire that you will need to add to your payment.

If you have any questions at all, please contact Trish Eldridge at teldridge@flsheriffs.org or call (850) 559-5668.

Sincerely,

Trish Eldridge

Director of Accounting and Finance
Florida Sheriffs Association

FLORIDA SHERIFFS ASSOCIATION

Cooperative Purchasing Program

Contract Terms and Conditions

Appendix D: Federal Clauses

Applicability of Third-Party Contract Provisions*

(Excluding micro-purchases, except Davis-Bacon requirements apply to construction contracts exceeding \$2,000.)

In addition to other provisions negotiated with purchasers placing federally funded purchase orders, Vendors must comply with the following provisions upon award of a federally funded purchase order:

PROVISION	Professional Services/A&E	Operations/ Management	Construction	Materials & Supplies
Equal Employment Opportunity			All	
Davis-Bacon Act			>\$2,000	
Copeland "Anti-Kickback" Act			>\$2,000	
Contract Work Hours and Safety Standards Act	>\$100,000	>\$100,000	>\$100,000	>\$100,000
Rights to Inventions Made Under a Contract or Agreement	If the purchase order involves performance of experimental, developmental or research work	If the purchase order involves performance of experimental, developmental or research work	If the purchase order involves performance of experimental, developmental or research work	If the purchase order involves performance of experimental, developmental or research work
Clean Air Act	>\$150,000	>\$150,000	>\$150,000	>\$150,000
Federal Water Pollution Control Act	>\$150,000	>\$150,000	>\$150,000	>\$150,000
Debarment and Suspension	All	All	All	All
Byrd Anti-Lobbying Amendment	>\$100,000	>\$100,000	>\$100,000	>\$100,000
Procurement of Recovered Materials	All	All	All	All
Prohibition on Certain Telecommunications and Video Surveillance Services or Equipment	All	All	All	All
Domestic Preferences for Procurements	All	All	All	All

*References to the code of regulations (CFR) or United States Code (USC) were accurate at the time of publication. It is the responsibility of the bidder to ensure compliance is met of the referenced state and federal laws within the published rules.

EQUAL EMPLOYMENT OPPORTUNITY: Except as otherwise provided under 41 CFR Part 60, all contracts that meet the definition of "federally assisted construction contract" in 41 CFR Part 60-1.3 must include the equal opportunity clause provided under 41 CFR 60-1.4(b), in accordance with Executive Order 11246, "Equal Employment Opportunity" (30 FR 12319, 12935, 3 CFR Part, 1964-1965 Comp., p. 339), as amended by Executive Order 11375, "Amending Executive Order 11246 Relating to Equal Employment Opportunity," and implementing regulations at 41 CFR part 60, "Office of Federal Contract Compliance Programs, Equal Employment Opportunity, Department of Labor." The clause set forth in 41 CFR 60-1.4(b) is incorporated herein by reference. Vendor must comply with this clause and include this clause in all lower-tier federal assisted construction contracts.

FLORIDA SHERIFFS ASSOCIATION

Cooperative Purchasing Program

Contract Terms and Conditions

DAVIS-BACON ACT, as amended (40 U.S.C. 3141-3148): When required by Federal program legislation, all prime construction contracts in excess of \$2,000 awarded by non-Federal entities must include a provision for compliance with the Davis-Bacon Act (40 U.S.C. 3141-3144, and 3146-3148) as supplemented by Department of Labor regulations (29 CFR Part 5, "Labor Standards Provisions Applicable to Contracts Covering Federally Financed and Assisted Construction"). In accordance with the statute, contractors must be required to pay wages to laborers and mechanics at a rate not less than the prevailing wages specified in a wage determination made by the Secretary of Labor. In addition, contractors must be required to pay wages not less than once a week. The non-Federal entity must place a copy of the current prevailing wage determination issued by the Department of Labor in each solicitation. The decision to award a contract or subcontract must be conditioned upon the acceptance of the wage determination. The non-Federal entity must report all suspected or reported violations to the Federal awarding agency. The contracts must also include a provision for compliance with the Copeland "Anti-Kickback" Act (40 U.S.C. 3145), as supplemented by Department of Labor regulations (29 CFR Part 3, "Contractors and Subcontractors on Public Building or Public Work Financed in Whole or in Part by Loans or Grants from the United States"). The Act provides that each contractor or subrecipient must be prohibited from inducing, by any means, any person employed in the construction, completion, or repair of public work, to give up any part of the compensation to which he or she is otherwise entitled. The non-Federal entity must report all suspected or reported violations to the Federal awarding agency. Vendors performing construction must comply with all applicable provisions of the Davis-Bacon Act and include this clause in all lower-tier subcontracts for construction.

CONTRACT WORK HOURS AND SAFETY STANDARDS ACT (40 U.S.C., chapter 37): Vendor shall comply with Sections 102 and 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C., chapter 37), as supplemented by Department of Labor regulations (29 CFR part 5).

(a) Overtime requirements. Neither Vendor nor any contractor or subcontractor contracting for any part of the purchase order work which may require or involve the employment of laborers or mechanics shall require or permit any such laborer or mechanic in any workweek in which he or she is employed on such work to work in excess of forty hours in such workweek unless such laborer or mechanic receives compensation at a rate not less than one and one-half times the basic rate of pay for all hours worked in excess of forty hours in such workweek.

(b) Violation; liability for unpaid wages; liquidated damages. In the event of any violation of the clause set forth in Paragraph 15(a), Vendor and any subcontractor responsible therefor shall be liable for the unpaid wages. In addition, Vendor or such subcontractor shall be liable to the United States (in the case of work done under the Contract for the District of Columbia or a territory, to such District or to such territory), for liquidated damages. Such liquidated damages shall be computed with respect to each individual laborer or mechanic, including watchmen and guards, employed in violation of the clause set forth in Paragraph 15(a), in the sum of \$29 for each calendar day on which such individual was required or permitted to work in excess of the standard workweek of forty hours without payment of the overtime wages required by the clause set forth in Paragraph 15(a) of this section.

(c) Withholding for unpaid wages and liquidated damages. Purchaser shall upon its own action or upon written request of an authorized representative of the Department of Labor withhold or cause to be withheld, from any moneys payable on account of work performed by Vendor or a subcontractor under the purchase order or any other Federal contract with Purchaser, or any other federally-assisted contract subject to the Contract Work Hours and Safety Standards Act, which is held by Purchaser, such sums as may be determined to be necessary to satisfy any liabilities of Vendor or its subcontractor for unpaid wages and liquidated damages as provided in the clause set forth in Paragraph (a).

(d) Subcontracts. Vendor shall insert in any subcontracts over \$100,000 for construction and other purposes that involve the employment of mechanics or laborers, the clauses set forth in Paragraphs (a) through (d) and also a clause requiring the subcontractors to include these clauses in any lower-tier subcontracts.

RIGHTS TO INVENTIONS MADE UNDER A CONTRACT OR AGREEMENT: If the Federal award meets the definition of "funding agreement" under 37 CFR § 401.2 (a) and the recipient or subrecipient wishes to enter into a contract with

FLORIDA SHERIFFS ASSOCIATION

Cooperative Purchasing Program

Contract Terms and Conditions

a small business firm or nonprofit organization regarding the substitution of parties, assignment or performance of experimental, developmental, or research work under that "funding agreement," the recipient or subrecipient must comply with the requirements of 37 CFR Part 401, "Rights to Inventions Made by Nonprofit Organizations and Small Business Firms Under Government Grants, Contracts and Cooperative Agreements," and any implementing regulations issued by the awarding agency. Vendor shall comply with these requirements when performing a purchase order involving experimental, developmental or research work and flowdown this clause to lower-tier subcontractors performing such work.

CLEAN AIR ACT (42 U.S.C. 7401 *et seq.*) and the FEDERAL WATER POLLUTION CONTROL ACT (33 U.S.C. 1251 *et seq.*), as amended: Vendor agrees to comply with all applicable standards, orders or regulations issued pursuant to the Clean Air Act (42 U.S.C. 7401 *et seq.*) and the Federal Water Pollution Control Act as amended (33 U.S.C. 1251 *et seq.*). Violations shall be reported to the Federal awarding agency and the Regional Office of the Environmental Protection Agency (EPA). Vendor shall comply with the requirements of Clean Air Act and the Federal Water Pollution Control Act and include this clause in all lower-tier subcontracts with a value over \$150,000.

DEBARMENT AND SUSPENSION (E.O.s 12549 and 12689): By accepting or performing this purchase order, Vendor certifies that it is not identified in the Exclusions area of the System for Award Management as being currently debarred, suspended, proposed for debarment, or otherwise excluded ("SAM Exclusion"). Vendor shall obtain similar certifications from its lower-tier subcontractors for each subcontract in excess of \$25,000 and Vendor shall not award lower-tier subcontracts in excess of \$25,000 to an entity subject to a SAM Exclusion.

LOBBYING RESTRICTIONS (31 U.S.C. 1352): By accepting or performing this purchase order, Vendor certifies that it will not and has not used Federal appropriated funds to pay any person or organization for influencing or attempting to influence an officer or employee of any agency, a member of Congress, officer or employee of Congress, or an employee of a member of Congress in connection with obtaining any Federal contract, grant or any other award covered by 31 U.S.C. 1352. Vendor shall also disclose to Purchaser any lobbying with non-Federal funds that takes place in connection with obtaining any Federal award or contract. Vendor shall flow down this clause and require this certification for lower-tier subcontractors with a subcontract of \$100,000 or more. Vendor shall provide its disclosure and all disclosures received from lower-tier subcontractors to Purchaser.

PROCUREMENT OF RECOVERED MATERIALS: A non-Federal entity that is a state agency or agency of a political subdivision of a state and its contractors must comply with section 6002 of the Solid Waste Disposal Act, as amended by the Resource Conservation and Recovery Act. The requirements of Section 6002 include procuring only items designated in guidelines of the Environmental Protection Agency (EPA) at 40 CFR part 247 that contain the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition, where the purchase price of the item exceeds \$10,000 or the value of the quantity acquired during the preceding fiscal year exceeded \$10,000; procuring solid waste management services in a manner that maximizes energy and resource recovery; and establishing an affirmative procurement program for procurement of recovered materials identified in the EPA guidelines. Vendor shall comply with this clause and include this clause in all lower-tier subcontracts.

PROHIBITION ON CERTAIN TELECOMMUNICATIONS AND VIDEO SURVEILLANCE SERVICES OR EQUIPMENT:

(a) Recipients and subrecipients are prohibited from obligating or expending loan or grant funds to:

- (1) Procure or obtain;
- (2) Extend or renew a contract to procure or obtain; or
- (3) Enter into a contract (or extend or renew a contract) to procure or obtain equipment, services, or systems that uses covered telecommunications equipment or services as a substantial or essential component of any system, or as critical technology as part of any system. As described in Public Law 115-232, section 889, covered telecommunications equipment is telecommunications equipment produced by Huawei Technologies Company or ZTE Corporation (or any subsidiary or affiliate of such entities).

FLORIDA SHERIFFS ASSOCIATION

Cooperative Purchasing Program

Contract Terms and Conditions

(i) For the purpose of public safety, security of government facilities, physical security surveillance of critical infrastructure, and other national security purposes, video surveillance and telecommunications equipment produced by Hytera Communications Corporation, Hangzhou Hikvision Digital Technology Company, or Dahua Technology Company (or any subsidiary or affiliate of such entities).

(ii) Telecommunications or video surveillance services provided by such entities or using such equipment.

(iii) Telecommunications or video surveillance equipment or services produced or provided by an entity that the Secretary of Defense, in consultation with the Director of the National Intelligence or the Director of the Federal Bureau of Investigation, reasonably believes to be an entity owned or controlled by, or otherwise connected to, the government of a covered foreign country.

(b) In implementing the prohibition under Public Law 115-232, section 889, subsection (f), paragraph (1), heads of executive agencies administering loan, grant, or subsidy programs shall prioritize available funding and technical support to assist affected businesses, institutions and organizations as is reasonably necessary for those affected entities to transition from covered communications equipment and services, to procure replacement equipment and services, and to ensure that communications service to users and customers is sustained.

(c) See Public Law 115-232, section 889 for additional information.

DOMESTIC PREFERENCES FOR PROCUREMENTS:

(a) As appropriate and to the extent consistent with law, the non-Federal entity should, to the greatest extent practicable under a Federal award, provide a preference for the purchase, acquisition, or use of goods, products, or materials produced in the United States (including but not limited to iron, aluminum, steel, cement, and other manufactured products). Vendor agrees to comply with the requirements of this clause and include the requirements of this clause in all subawards including all contracts and purchase orders for work or products under this award.

(b) For purposes of this section:

(1) "Produced in the United States" means, for iron and steel products, that all manufacturing processes, from the initial melting stage through the application of coatings, occurred in the United States.

(2) "Manufactured products" means items and construction materials composed in whole or in part of non-ferrous metals such as aluminum; plastics and polymer-based products such as polyvinyl chloride pipe; aggregates such as concrete; glass, including optical fiber; and lumber.