


Little Giant® KING KOMBO™

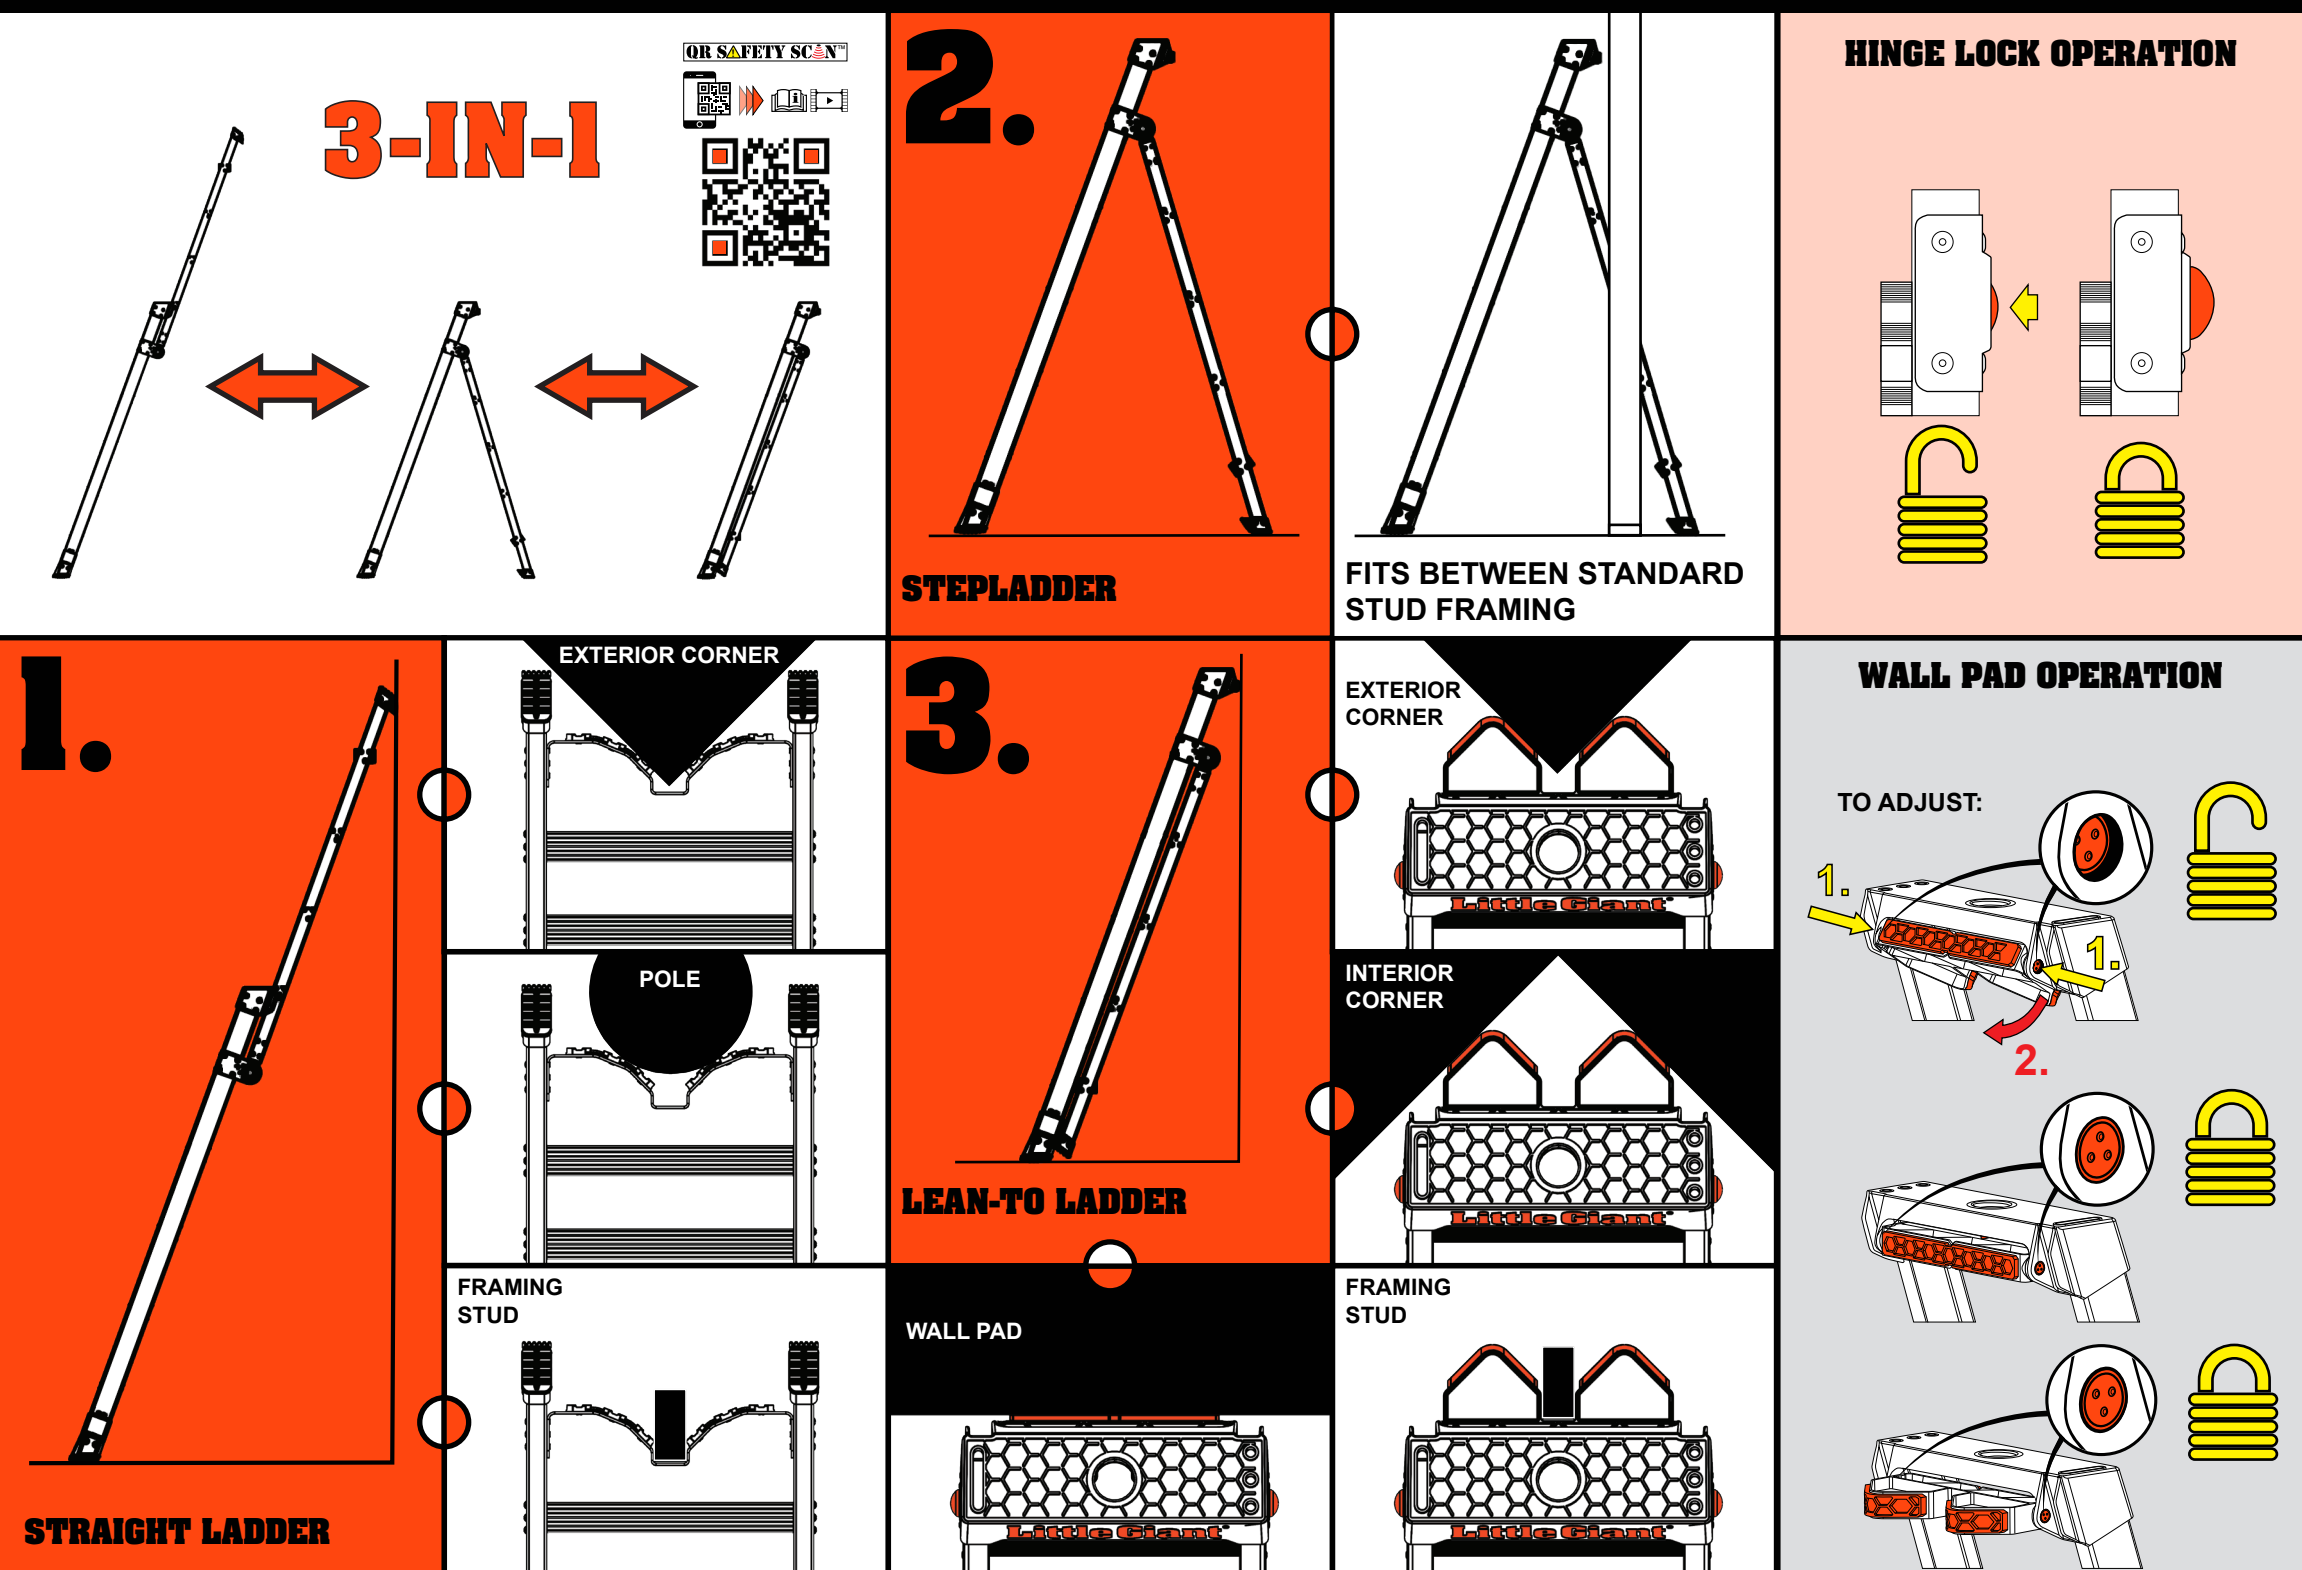

Unlock the hinges by pushing straight in on the palm buttons until they stay in the open (unlocked) position on both hinges. To lock, move the ladder into the desired position. The hinge locks are spring-assisted, and will spring into the closed (locked) position when hinge is rotated into the next ladder position.

NOTE: If there is pressure on the hinge lock mechanism, it will be difficult to unlock the hinge. To relieve pressure, simply adjust one half of the ladder back and forth until the hinge lock moves with minimal force. **DO NOT FORCE HINGE LOCK** in or out with any tools as it will cause permanent damage to the hinge mechanism. It should never require more than light pressure to unlock the hinge if the ladder is aligned properly.


WARNING: ALWAYS MAKE SURE BOTH HINGE LOCKS ARE COMPLETELY LOCKED BEFORE CLIMBING THE LADDER. FAILURE TO DO SO MAY RESULT IN INJURY OR DEATH.

KING KOMBO™ KING KOMBO™ KING KOMBO™



Up to 20% of stepladder-related injuries happen when a user misses the bottom step while descending a ladder, resulting in numerous injuries, such as sprained ankles, knee injuries and broken backs.

The patent-pending **GROUND CUE®** gives the operator a tactile and audible signal that they have reached the bottom step.

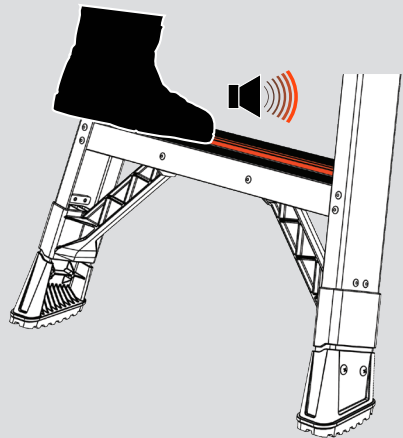

NEVER CLIMB A DAMAGED, BENT, OR BROKEN LADDER!

IF YOU NEED REPLACEMENT PARTS, PLEASE CONTACT YOUR LITTLE GIANT LADDERS DISTRIBUTOR. IF THE LADDER CANNOT BE REPAIRED, DESTROY IT AND REMOVE IT FROM SERVICE. FOR YOUR SAFETY, GO THROUGH THE FOLLOWING INSPECTION CHECK-LIST BEFORE EACH USE.

PREOPERATIONAL LADDER INSPECTION CHECKLIST

- ❑ There are no missing parts, and all rivets and/or fasteners are tight and secure.
- ❑ The steps and rails are in good condition with no cracks, twists, bends or large dents.
- ❑ All four feet sit flat on a level floor with the ladder in the stepladder position, and the ladder does not wobble.
- ❑ The feet are all present and in good condition, and the tread is not worn through.
- ❑ The hinge locks function properly, and fully lock into the storage, stepladder, and straight ladder positions.
- ❑ All safety labels are present and legible.

IF YOU ENCOUNTER ANY ISSUES DURING THE INSPECTION, PLEASE CONTACT YOUR LITTLE GIANT LADDERS DISTRIBUTOR FOR REPLACEMENT PART AND WARRANTY INFORMATION.

WARRANTY

Little Giant Ladder Systems guarantees all its products to be free from material and manufacturing defects. Contact the distributor to obtain local warranty duration information, and if you believe your product is defective, to obtain repair/replacement information.



Distributor contact information can be found at the bottom of a label on the product containing the PAS-MARK logo.

DANGER: MISUSE OF A LADDER MAY RESULT IN A FALL, SERIOUS INJURY, PARALYSIS OR DEATH. LITTLE GIANT LADDER SYSTEMS ASSUMES NO LIABILITY FOR DAMAGE OR INJURY THAT MAY RESULT FROM FAILING TO FOLLOW ALL INSTRUCTIONS CORRECTLY. HEED THE FOLLOWING SAFETY PRECAUTIONS:

General Operating Safety Tips

1. Select ladder size to reach work without climbing above the highest standing level or over-reaching. Never tie or fasten ladders together to gain additional height.
2. Weight of user, tools, and materials shall not exceed working load capacity.
3. Do not use where electrical hazard exists.
4. Inspect the ladder before use. Do not use ladders with missing or damaged parts. Make sure locks and moving parts are in good working order and replace heavily worn feet and illegible labels.
5. Keep ladder and hinges clean from unsafe materials and free of slippery substances.
6. Set ladder feet on a firm and stable surface, with rungs level side-to-side. Maintain a distance of no less than 5 cm of clearance between ladder feet and edge of surface. Do not place in front of unlocked doors opening toward ladder.
7. Do not use on slippery surfaces without securing the ladder from movement.
8. To protect children, do not leave the ladder set up and unattended.
9. Do not use ladders if your judgement or balance is reduced by age, health, alcohol or drugs.
10. Face the ladder and use both hands when climbing up or down. Remove jewelry, and wear clean slip-resistant work shoes. Use extreme caution getting on and off ladder.
11. Lean into or hold onto ladder to maintain three points of contact while working.
12. Do not over-reach. Keep the ladder close to your work and keep your body centered between side rails. Climb down and move the ladder as needed. Use care if pushing or pulling to the side.
13. Do not climb on or off the ladder from the side unless it is secured against tipping or sideward motion.
14. When possible, have another person hold the ladder.
15. To avoid pinching, keep clothing, jewelry, and body parts out of all moving mechanisms.
16. Do not use ladders in high winds or storms.
17. Do not spend long periods of time on a ladder without regular breaks.
18. Never drop or apply an impact load to a ladder.

Stepladder Mode Safety Tips

1. Do not walk or move the ladder while standing on it.
2. Do not stand on or climb above the second rung from the top of the ladder. Do not straddle over ladder top. Do not sit on any part of the ladder.

Straight Ladder Mode Safety Tips

1. When using your ladder in the straight ladder mode, stake the feet to the ground and tie down the top for extra security. Extend the ladder at least 1 m above a supporting roof or eave.
2. Do not stand on or climb above the third rung from the top of the ladder. If accessing a roof, do not lean or push on the top of the ladder, which can cause the bottom to move. Do not step on rungs above the top support.
3. Do not allow the full weight of the ladder to fall on the hinges as the ladder folds from the straight ladder mode to the stepladder mode.
4. Do not use the ladder as a brace, plank, platform, or hoist.

Little Giant Ladder Systems is not responsible for faults in the product if it is clear the fault is due to:

- not using, maintaining or storing the product in accordance to these instructions.
- being rebuilt, modified or subjected to other external damage or accident.
- unintentionally being damaged by any object or substance.
- being overloaded or set up incorrectly.
- being repaired by an unauthorized service partner.

KING KOMBO™ KING KOMBO™ KING KOMBO™



This ladder is intended to carry a maximum load of

150 kg
INDUSTRIAL

AS/NZS 1892.1

Little Giant Ladder Systems

CLIMB ON

83676 v0 9 19 AS/NZS

KING KOMBO is a trademark, and LITTLE GIANT, LITTLE GIANT LADDER SYSTEMS, CLIMB ON, and GROUND CUE are registered trademarks of Wing Enterprises, Inc. in the United States. LITTLE GIANT is registered in Australia and New Zealand.

LITTLE GIANT® KING KOMBO™ ladders may be protected by one or more U.S. or international patents, and/or may have additional patents pending. Visit www.LittleGiantLadders.com/patents for details. This web page is provided in compliance with the virtual patent marking provisions of the America Invents Act.