


TECHNICAL INFORMATION

Models No. ▶ 6824N

Description ▶ Drywall Screwdriver

CONCEPTION AND MAIN APPLICATIONS

Model 6824N has been developed as a new version of 6824 series model. Their feature is "Normal Clutch" which is convenient for unscrewing.

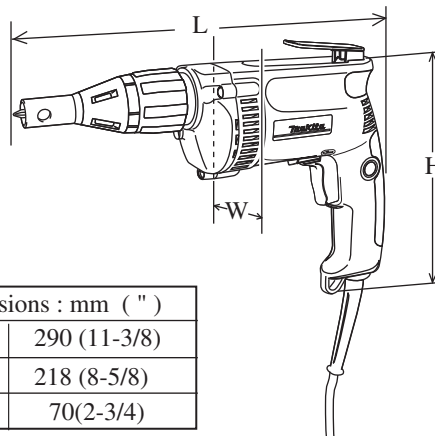

Dimensions : mm (")	
Length (L)	290 (11-3/8)
Height (H)	218 (8-5/8)
Width (W)	70(2-3/4)

► Specification

Voltage (V)	Current (A)	Cycle (Hz)	Continuous Rating (W)		Max. Output(W)
			Input	Output	
120	6.5	50 / 60	(710)	340	590

Model No.		6824N
Rated ampere with 120V : A		6.5
No load speed : min -1=rpm		0 - 4,500
Driving shank		6.35mm (1/4") hex
Capacity : mm (")	Self drilling screw	6 (1/4)
	Drywall screw	5 (3/16)
Variable switch		Yes
Reverse switch		Yes
Protection from electric shock		by double insulation
Cord length : m (ft)		2.5 (8.2)
Net weight : Kg (lbs)		1.4 (3.1)
Shipping unit weight: kg. (lbs.)		2.0 (4.40)
Master carton weight: kg. (lbs.)		10.0 (22)
Master carton quantity		5
Shipping unit dimensions: mm (")		350 x 276 x 81 (13.78 x 10.87 x 3.19)
Master carton dimensions: mm (")		408 x 363 x 302 (16.06 x 14.29 x 11.89)
Pallet quantity		200


► Standard equipment

- * Philips bit 2 - 25 1 pc. (784211-2A)
- * Magnetic socket bit 6.35-76 1 pc. (784801-1)
- * Locator Complete 1 pc. (151726-8)

► Optional accessories

- * Philips bit 1 - 25
- * Philips bit 2 - 25
- * Philips bit 3 - 25
- * Magnetic connect bit 6.35-60
- * Adjust sleeve complete for magnetic connect bit 6.35-76

► Features and benefits

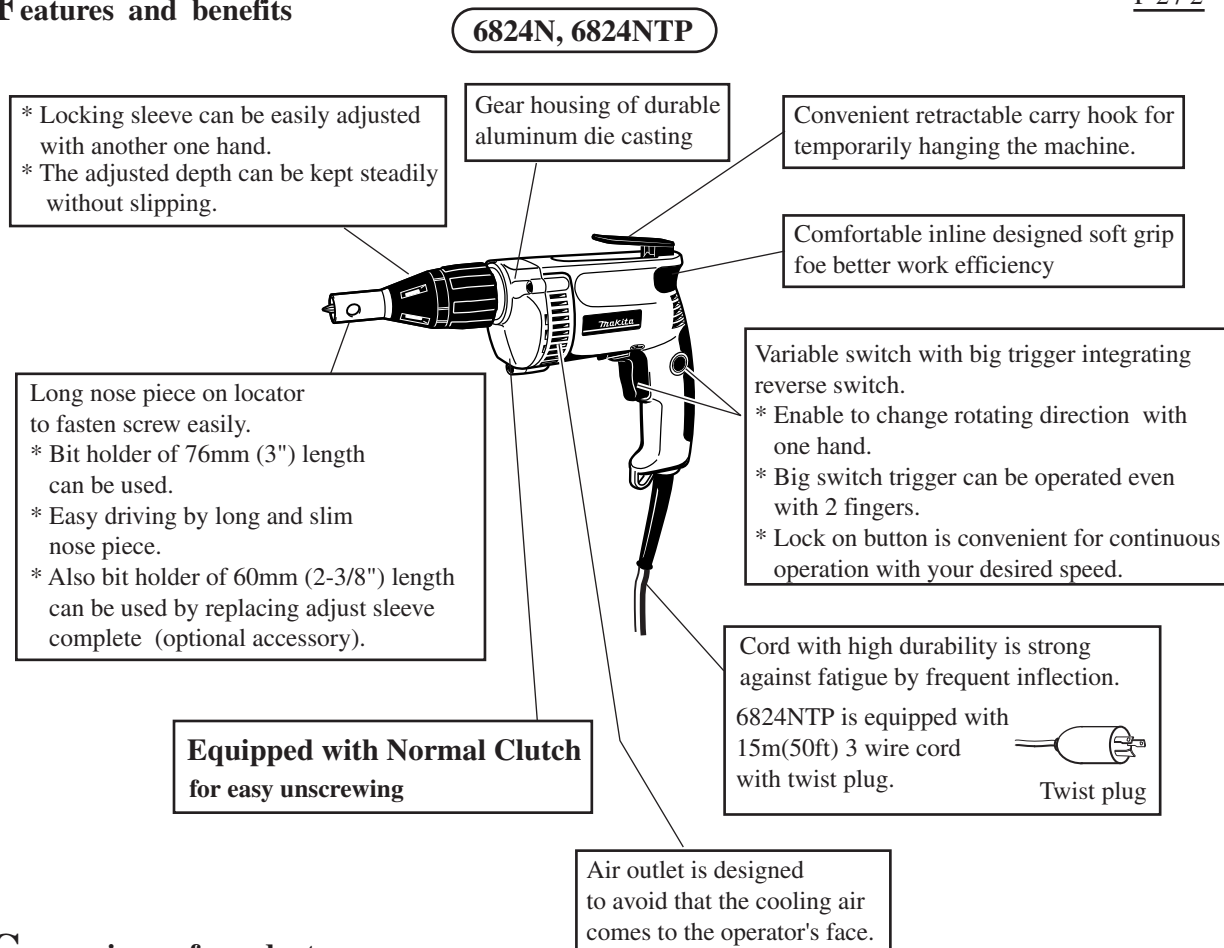

► Comparison of products

Model No.		MAKITA				DeWALT
		6824N	6824NTP	6824	6824TP	DW252
Specifications						
Rated ampere with 120V : A		6.5	6.5	6.5	6.5	6.0
No load speed : min -1=rpm		0 - 4,500	0 - 4,500	0 - 4,500	0 - 4,500	0 - 4,000
Driving shank		6.35mm (1/4") hex	6.35mm (1/4") hex	6.35mm (1/4") hex	6.35mm (1/4") hex	6.35mm (1/4") hex
Capacity : mm (")	Self drilling screw	6 (1/4)	6 (1/4)	6 (1/4)	6 (1/4)	6 (1/4)
	Drywall screw	5 (3/16)	5 (3/16)	5 (3/16)	5 (3/16)	5 (3/16)
Silent clutch		No	No	Yes	Yes	No
Variable switch		Yes	Yes	Yes	Yes	Yes
Reverse switch		Yes	Yes	Yes	Yes	Yes
Material of gear housing		Aluminum	Aluminum	Aluminum	Aluminum	Plastic
Protection from electric shock		by double insulation	by grounding	by double insulation	by grounding	by double insulation
Overall length : mm (")		290 (11-3/8)	290 (11-3/8)	290 (11-3/8)	290 (11-3/8)	310 (12-1/4)
Net weight : Kg (lbs)		1.4 (3.1)	1.4 (3.1)	1.4 (3.1)	1.4 (3.1)	1.3 (2.8)
Cord length : m (ft)		2.5 (8.2)	15 (50)	2.5 (8.2)	15 (50)	2.4 (7.9)
Standard equipments		* Philips bit 2-25 * Magnetic connect bit 76	* Philips bit 2-25 * Magnetic connect bit 76	* Philips bit 2-25 * Magnetic connect bit 76	* Philips bit 2-25 * Magnetic connect bit 76	* Philips bit 2-25 * Magnetic connect bit 76