


DEVELOPS MORE TORQUE, FASTER
1/2" IMPACT WRENCHES

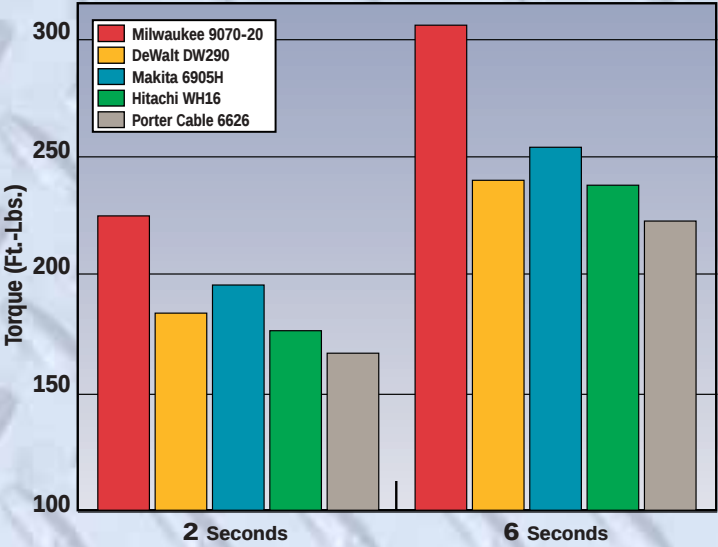

IN REPETITIVE FASTENING APPLICATIONS, MILWAUKEE GETS THE JOB DONE UP TO 65% FASTER!

SOURCE: Internal tests performed on a Skidmore-Wilhelm Model RL Analyzer. Each torque application in an average of five trials per tool.

COMMON APPLICATIONS

- Installation And Removal Of Concrete Anchor Bolts/Nuts/Screws
- Metal Building Frame And Panel Assembly
- Plant Maintenance, Moving/Repairing Machinery
- Farming Tractor And Implement Repair
- Dock And Sea Wall Construction
- Building Decks, Gazebos And Swing Sets
- Drilling Landscaping Timbers
- Retaining Walls
- Assembly/Removal Of Portable Seating
- Agricultural Irrigation System Installation
- Automobile Maintenance And Wheel Lug Nuts
- Cordless Wrench For Roadside Vehicle Repair
- Department Of Public Works Applications
- Utility Crew Applications

ACCESSORIES



IMPACT RESISTANT CARRYING CASE

48-55-9075 Standard equipment for 9072-22 Kit and 9079-22 Kit.



CONTRACTOR BAG

48-55-3490 Made of tough, water ristant, 600 denier material. Provides extra storage for job-site tools and accessories.



18 VOLT BATTERY PACKS

48-11-2230 2.4 Amp-Hr battery

POWER-PLUS ONE HOUR CHARGER

48-59-0245 Charges ALL Milwaukee Power-Plus batteries, including Ni-Cd and Ni-MH.



48-59-0184 Plugs into vehicles cigarette lighter. Compatible with ALL Milwaukee Power-Plus batteries, including Ni-Cd and Ni-MH.



1/2" SQUARE DRIVE HEX SOCKETS

Standard equipment for 9072-22 Kit.

49-66-3080 1/2" 49-66-3110 11/16"
49-66-3090 9/16" 49-66-3120 3/4"
49-66-3100 5/8" 49-66-3130 13/16"



5" LENGTH 1/2" SQUARE DRIVE EXTENSION

48-95-5000 Adapts to 1/2" Square Drive. Provides 5" additional length where required for use with sockets.



1/2" SQUARE DRIVE UNIVERSAL JOINT

48-03-0500 Fits 1/2" Square Drive and used with Hex Sockets to reach difficult places at various angles...also allows clearance around obstructions.



1/2" SQUARE DRIVE TO 7/16" HEX ADAPTER

48-66-0061 Use with 7/16" hex shank auger bits, selfeed bits or other 7/16" hex shank accessories which have ball-retainer grooves.



TOOL SPECIFICATIONS

1/2"



CATALOG NUMBER	9070-20	9071-20	9072-20	9072-22
VOLTS (AC/DC)	120	120	120 (AC Only)	120 (AC Only)
AMPS	7.0	7.0	7.0	7.0
IMPACTS PER MINUTE	2,600	2,600	1,000-2,600	1,000-2,600
NO LOAD RPM	1,800	1,800	600-1,800	600-1,800
TORQUE (FT.-LBS.)	300	300	100-300	100-300
OVERALL LENGTH (INCHES)	11-5/8	11-5/8	11-5/8	11-5/8
NET WEIGHT (LBS.) – TOOL ONLY	6.0	6.0	6.0	6.0
SHIP WEIGHT (LBS.)	7.6	7.6	7.6	12.7

STANDARD EQUIPMENT: FOR 9070-20, 9071-20, 9072-20 – Tool Only. FOR 9072-22 – Includes Tool, Six Socket Set (1/2", 9/16", 5/8", 11/16", 3/4", 13/16") and Impact Resistant Carrying Case 48-55-9075.

3/4"



CATALOG NUMBER	9075-20
VOLTS (AC/DC)	120
AMPS	7.0
IMPACTS PER MINUTE	2,500
NO LOAD RPM	1,750
TORQUE (FT.-LBS.)	380
OVERALL LENGTH (INCHES)	11-5/8
NET WEIGHT (LBS.) – TOOL ONLY	6.2
SHIP WEIGHT (LBS.)	8.0

STANDARD EQUIPMENT: FOR 9075-20 – Tool Only.

18 VOLT 1/2"



CATALOG NUMBER	9079-20	9079-22
VOLTS	18	18
TORQUE (FT. LBS.)	240	240
RPM	0-1400	0-1400
IMPACTS PER MINUTE	0-2200	0-2200
BATTERIES	NA	2
OVERALL LENGTH (INCHES)	11-5/8	11-5/8
NET WEIGHT (LBS.) - TOOL W/ BATTERY	9.0	9.0
SHIP WEIGHT (LBS.)	7.3	17.8

STANDARD EQUIPMENT FOR 9079-20 – Tool Only. FOR 9079-22 – Tool, 2-2.4 Ah Batteries, Charger 48-59-0245 and Impact Resistant Carrying Case 48-55-9075.

ONE YEAR FREE MAINTENANCE PROGRAM

ONE YEAR FREE MAINTENANCE – The 9070-20, 9071-20, 9072-20, 9072-22, 9075-20, 9079-20, 9079-22 are covered against normal wear for one year from the date of purchase (proof of purchase is required).

Anytime during the first year take your tool or ship prepaid to a Milwaukee Branch Office Service Center where it will be checked and serviced at no charge and returned transportation prepaid. The plan does not apply where evidence of misuse, use of improper accessories or repairs have been made by others.

MILWAUKEE ELECTRIC TOOL CORPORATION
A Company Within The Atlas Copco Group
FOR MORE INFORMATION CALL 1-262-783-8311
WWW.MIL-ELECTRIC-TOOL.COM

IMPACTWRNC/3-01/C-GRPH/100M/Printed in U.S.A.



BEST
POWER TO
WEIGHT
RATIO

1/2" 9070-20
9071-20
9072-20
9072-22
3/4" 9075-20
18 VOLT 9079-20
9079-22





MORE TORQUE PER POUND THAN ANY COMPETITOR!

BEST POWER TO WEIGHT RATIO

AVAILABLE IN CORDLESS!



240
FT.-LBS.
MAX
TORQUE

18 VOLT 1/2" IMPACT WRENCH (9079-22)

- The MOST torque (240 ft. lbs.) of any cordless impact wrench!
- The torque of a corded impact wrench, without the cord!
- Easily removes and tightens lug nuts on vehicles
- Variable Speed Reversing Switch, 0-1400 RPM
- 0-2200 Impacts per minute
- Reversible battery pack makes it easy to get into tight spaces
- Mid-handle design for comfort and balance
- 1/2" Pin/Detent Socket Retainer Holds Sockets And Adapters More Securely
- Comfortable soft-grip handle pad
- Includes TWO 2.4 Ah batteries, delivering maximum run time
- Part of the Milwaukee 18 Volt Cordless System



Great for landscaping and snow removal maintenance where an extension cord cannot be used.



Ideal for emergency road service. Easily removes and fastens lug nuts.



High torque hard joint fastening.



Drill large holes with little torque reaction.

9072-20 FEATURES:

- 1/2" Pin/Detent Socket Retainer Holds Sockets And Adapters More Securely
- 300 Ft.-Lbs. of Torque
- Variable Speed Switch Offers Added Control For Drilling In Wood Or Driving Lag Bolts.
- Trigger Speed Control Switch Includes Speed Limiting Dial For Setting Desired Speed/Torque
- 10' Quik-Lok® Rubber Cord
- Kit Model 9072-22 Includes Six Sockets and Impact Resistant Carrying Case



9070-20 FEATURES:

- 1/2" Pin/Detent Socket Retainer Holds Sockets And Adapters More Securely
- 300 Ft.-Lbs. of Torque
- Forward/Reverse Rocker Switch (AC/DC) Is Ideal When Frequent Reversing Is Necessary
- 8' Rubber Cord

9071-20 FEATURES:

- 1/2" "Hog" Ring Socket Retainer For Frequent Socket Changes
- 300 Ft.-Lbs. of Torque
- Forward/Reverse Rocker Switch (AC/DC) Is Ideal When Frequent Reversing Is Necessary
- 8' Rubber Cord



9075-20 FEATURES:

- Pin/Detent Socket Retainer Holds Sockets And Adapters More Securely
- Delivers The Extra Torque Needed For Large Bolts Or For Removing Stubborn Nuts
- 380 Ft.-Lbs. of Torque
- Forward/Reverse Rocker Switch (AC/DC) Is Ideal When Frequent Reversing Is Necessary
- 8' Rubber Cord