

Model Type	Skyjack SJ4726 Electric Scissor Lift	
Working height	9.82m	
Length	2.33m	
Width	1.20m	
Lifting Capacity	454kg	
Machine weight	1979kg	
Power	Electric	
Use	 IN/OUT	

STANDARD FEATURES

The Skyjack SJ4726 electric scissor lift is engineered for productivity, reliability, and ease of use, making it a trusted choice across construction, maintenance, and industrial applications. Combining a generous platform size with impressive lift capability, it delivers a safe and stable solution for elevated work.

- Drivable at full height
- Variable speed, dual rear wheel electric drive
- Dual holding brakes
- SKYCODED™ Colour coded and numbered wiring system
- On-board visual interface with diagnostic capabilities
- Shroud style, impact resistant composite control box with extended cable
- Low battery indicator light on control box
- Proportional controls for drive & lift functions
- 0.91m roll out extension deck
- 24V DC Power source
- Low voltage battery protection
- 25% Gradeability
- Solid rubber, non-marking tyres
- Pothole protection system
- Tilt alarm with drive & lift cut-out (3.5° x 1.5°)
- 12.5 m/s Wind rating
- Flashing light
- Lanyard attachment points
- Operator horn
- Forklift pockets and tie down / lift lugs
- Overload sensing system
- Fold down hinged railing system
- Half height spring hinged entry gate
- Universal smart charger
- Single point emergency lowering
- Arm guard with slow close descend
- Telematics ready

IPAF Category 3a

Do you hold a valid operator's licence?

The Powered Access Licence (PAL) Card is recognised worldwide as proof of platform operator training to the highest standard.

It is issued by the International Powered Access Federation (IPAF) to platform operators who successfully complete a training course at an IPAF approved training centre.

Quick checklist for employers and operators using powered access machines:

- ✓ I have an IPAF PAL card
- ✓ Date is still valid (Licence expires after 5 years)
- ✓ All categories for the machine's being used are listed on the PAL card (e.g. 3a, 3b, PAV).



If you can answer yes to all three, you're good to go!

If not, please call us to discuss your requirements and arrange a training course.







For more information head to our website starplatforms.co.uk



SJ4726 Electric Scissor Lift

Dimensions	
Work Height A	9.82m
Raised Platform Height B	7.82m
Lowered Platform Height C	1.17m
Overall Width D	1.20m
Overall Length E	2.33m
Stowed Height (Rails Up) F	2.29m
Stowed Height (Rails Down) G	1.90m
Platforms Width (Inside Dimension) H	1.07m
Platforms Length (Inside Dimension) I	2.11m
Specifications	
Extension Deck (Roll Out)	1.2m
Ground Clearance (Pothole Raised)	10cm
Ground Clearance (Pothole Deployed)	1cm
Wheelbase	1.75m
Weight	1,979kg
Gradeability	25%
Turning Radius (Inside)	0.72m
Turning Radius (Outside)	2.72m
Lift Time (With Rated Load)	60 sec
Lower time (With Rated Load)	33 sec
Drive Speed (Stowed)	3.4 km/h
Drive Speed (Raised)	0.7 km/h
Maximum Drive Height	Full Height
Capacity (Overall)	454kg
Distributed Capacity (Main Platform)	318 kg
Distributed Capacity (Extension Deck)	136 kg
Local Floor Load (With Rated Load)	823 kPa
Overall Floor Load (With Rated Load)	8.5kPa
Max # of persons at 0 m/s wind rating	3
Max # of persons up to 12.5 m/s w/rating	1
Tyre Type	Solid, N/M
Tyre Size	16 x 5 x 12
Star Code	SE2646

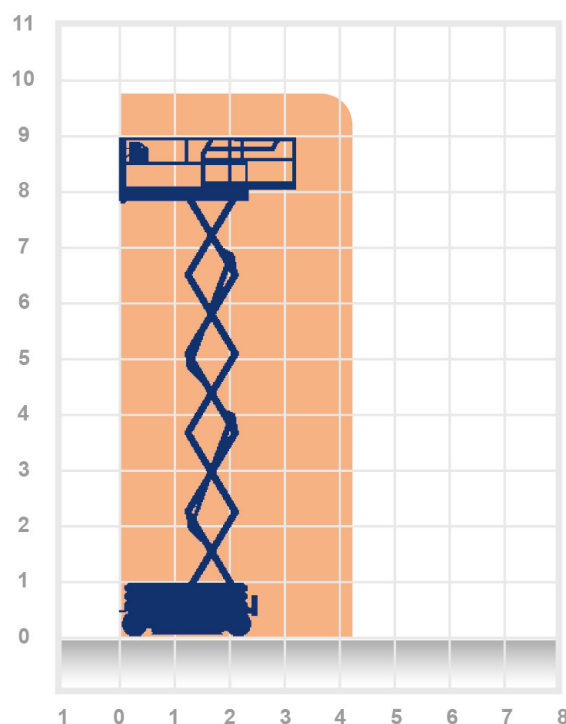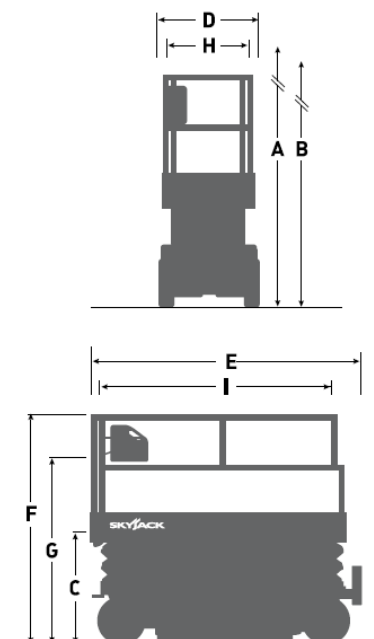

Have you discovered our sister company, Star Power?

Your one-stop shop for temporary power hire

03300 535622 / star-power.co.uk

