

DEFCUBE GLOBAL 500 - 2,200 LITRES

The AdBlue storage solution from Western Global



The DEFCUBE Global is a transportable, environmentally secure, double-walled diesel exhaust fluid storage tank, that offers extended run time on stage IV/V diesel generators and other non-road mobile machinery. Ideal for both hot and cold climates, the DEFCUBE Global is the ideal solution for the temporary power industry's auxiliary DEF dispensing and replenishment needs.

FEATURES

STACKABLE DESIGN

Stackable design (2 high full, 3 high empty). Will stack on WG 30TCG diesel tank (22DEF only).

LOCKABLE EQUIPMENT CABINET

Secure lockable compartment for pumps & accessories.

COMPATIBILITY

Compatible with Stage V gen-sets with onboard lift pump from JCB, Generac, etc.

TRANSPORTABLE

Transportable full design.

RENTAL READY

Robust 'rental ready' design with outer containment tank.

STAINLESS STEEL

Stainless steel fitting plate that is customisable by end user depending on fittings required.

REMOVABLE INNER TANK

Removable inner polyethylene tank (8mm thick) - ideal for storing DEF.

LIFTABLE FULL


Tank certified for top lift by 3rd party.

STANDARD FIT

Standard fit out includes fill cap, breather vent, pump feed and contents gauge.

FOUR WAY FORKLIFT POCKETS

Forklift pockets and lifting lugs for ease of transport.

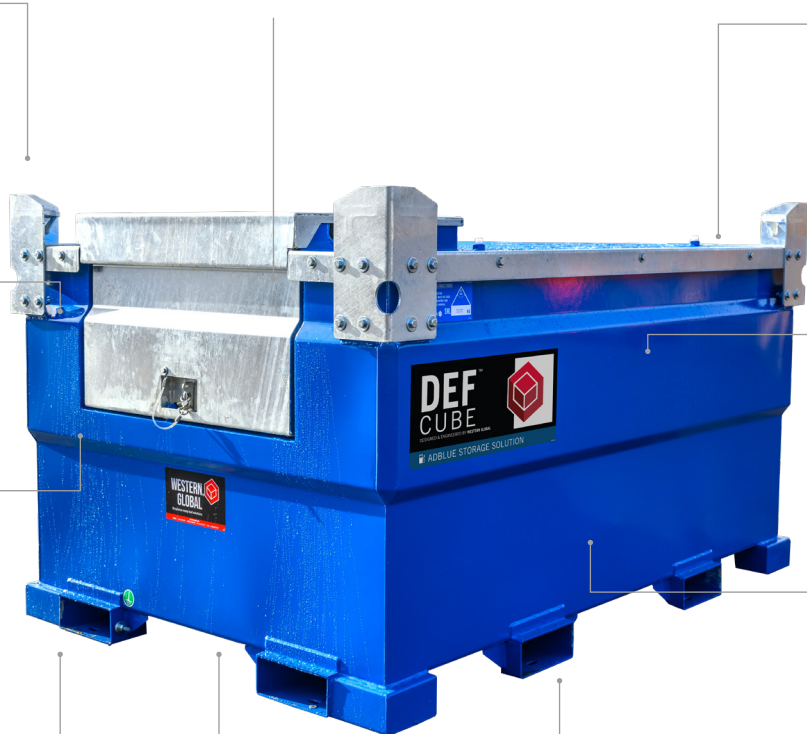



IDEAL USES AND APPLICATIONS

GENERATORS AND AUXILIARY EQUIPMENT

The DEFCUBE Global can be easily connected to generators to supply DEF in the same way auxiliary diesel tanks are connected to a generator unit.

SHORT TERM DEF REQUIREMENT

The DEFCUBE Global is the ideal solution for short term, onsite DEF storage. Due to its mobile design, the DEFCUBE Global can transport DEF to any site - reaching even the most difficult locations.

MODELS AND CAPABILITIES



SPECIFICATIONS	05DEF	22DEF
Capacity	500 L	2,200 L
Dimensions (L x W x H)	1,132 x 1,132 x 1,145 mm	2,316 x 1,566 x 1,326 mm
Cabinet Dimensions (W x H)	337 x 424 mm	368 x 1051 mm
Weight (Empty)	328 / 828 Kg	810 / 3,340 Kg
Optional pump	240V, 12V and Handpump options	240V, 12V and Handpump options
Optional heater kit for tank with generator feed	Heating jacket for inner tank 2,300W Heated feed hose 400W Heating controller module with thermostat 230V AC power cable (6m length)	N/A

*22DEF available for delivery from April 2024