

XCR90 Rough Terrain Crane


Technical specifications



90t



48m



63.1m



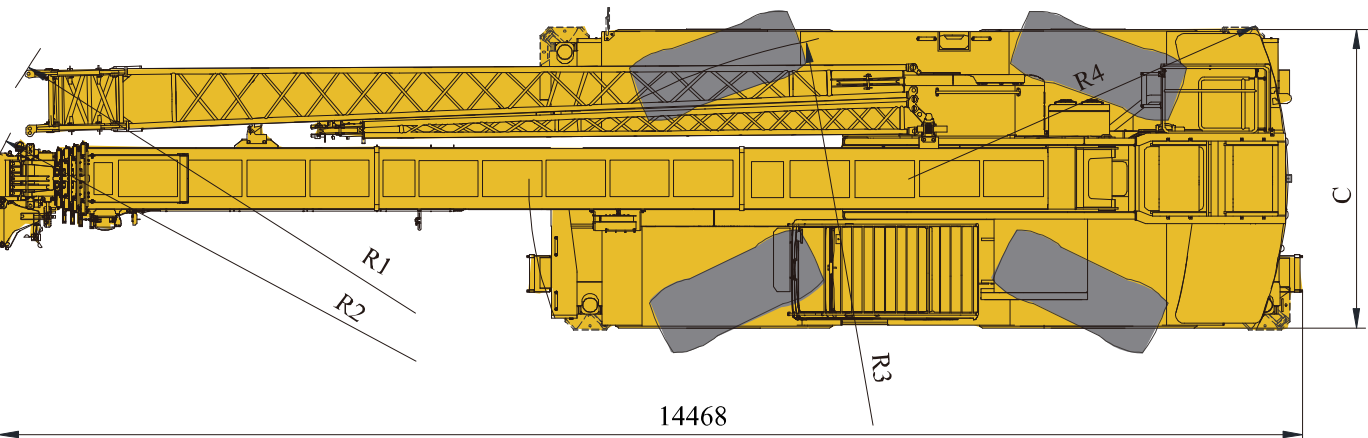
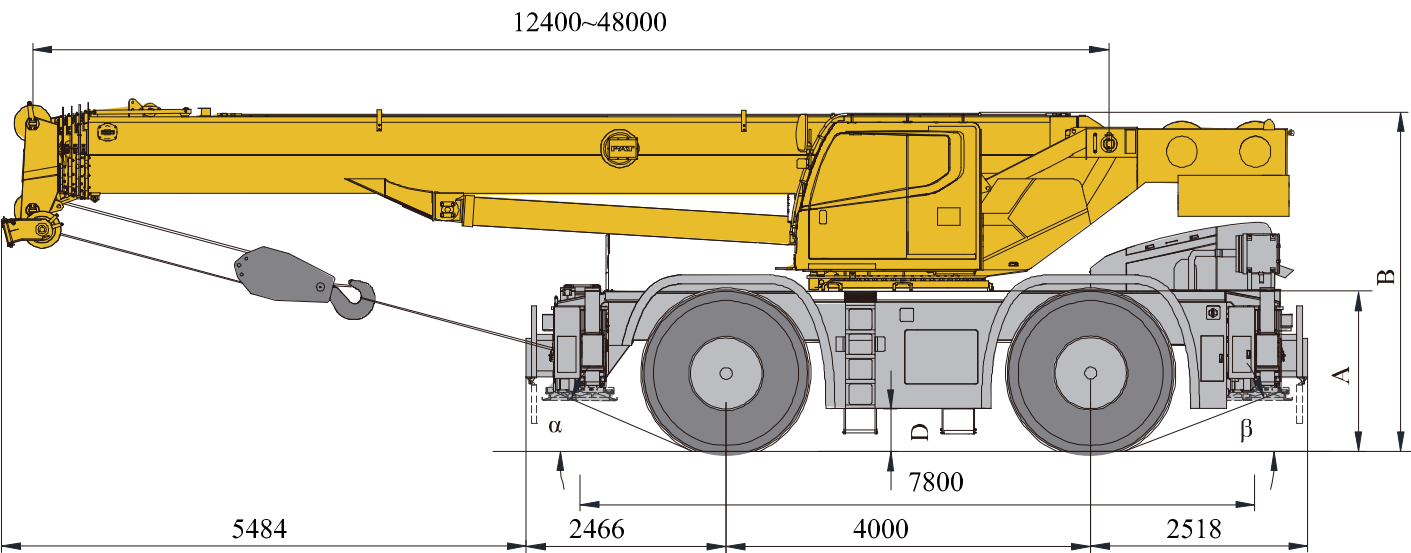
November.2021

Contents

Contents

Dimensions	3
Technical specifications	4-5
Weight / Working speeds	6
Counterweight	7
Boom / Jib combinations	8-9
Boom	10-12
Jib	13-15
Description of symbols	16
Table of main technical parameters	17-18
Notes	19

Dimensions



	α	β	A	B	C	D	R1	R2	R3	R4
29.5R25	24°	24°	1896	3898	3280	550	11264	11589	6500	4544

Technical specifications

		
Boom	1 basic boom and 4-telescoping sections, U-shape cross section welding structure. Double cylinder plus ropes telescoping mechanism. 6 pulleys on boom head are standard. Boom length: 12.4 m ~ 48 m.	●
Jib	Two-section lattice structure. Three offset angles of 0°, 15° and 30° are available. It is stowed along the side of the boom. Jib length 10.5m~17.5 m.	●
Frame	Made of high strength fine grained steel, welded torsion-resistant frame type construction with large cross-section, high load-bearing capacity.	●
Outrigger	4 outriggers, H-shaped arrangement, which are controlled by electrical and hydraulic and located at both sides of chassis frame.	●
Engine	SC9DK260.1G3, in line, six-cylinder water-cooled compression ignition diesel engine, manufactured by Shangchai, with rated power of 192/2000(kW/(r/min)), max. torque of 1110/(1200-1600)(N.m/(r/min)), off-road EU Stage IIIA emission standard compliant Fuel tank capacity: approx. 305 L	○
Engine	QSB6.7-C260-30, in line, six-cylinder water-cooled compression ignition diesel engine, manufactured by Dongkang, with rated power of 194/2200(kW/(r/min)), max. torque of 990/1500(N.m/(r/min)), off-road EU Stage IIIA emission standard compliant Fuel tank capacity: approx. 305 L	○
Transmission	6WG210, automatic transmission from ZF Germany, with 6 forward and 3 reverse gears	●
Axles	Both front and rear axles are for driving and steering, and the axles have features of great load bearing capacity	●
Suspensions	Front axle is rigidly connected with frame; rear axle is equipped with swing hydraulic suspensions, which have cushioning function when driving on roads; the rear suspension cylinder may be locked to rigid state so as to meet the requirement for travel with a load suspended, increasing operation stability.	●
Tires	4 specialized off-road, large bearing capacity. Tire specifications: 29.5R25.	●
Steering	Front axle independent steering, tight turning radius steering, crab walk steering and rear axle independent steering modes are available. The steering angle can be self-adjusted when changing mode.	●
Brakes	Service brake: double-circuit hydraulic disc brake, acting on all wheels. Automatically braking and alarm are available when the pressure in braking system is too low. Parking brake: spring-loaded brake, acting on front axles, hydraulic-released independent disc brake.	●
Hydraulic system	A dual-variable displacement pump, used for hoisting, elevating and telescoping operations, and a gear pump, used for slewing, outrigger, steering and braking operations; a load sensitive proportional multi-way change valve is used as main valve; an independent hydraulic oil radiator. Tank capacity: approx. 1057 L.	●
Operating mode	Hydraulic controlled pilot operation system is equipped with two levers controlling the main movements of the crane.	●
Electrical System	24 V DC, two sets of 12 V battery in series.	●
Main winch system	The system is driven by a hydraulic motor through a planetary gear reducer, with a normally closed brake and a balance valve equipped.	●
Auxiliary winch system	The system is driven by a hydraulic motor through a planetary gear reducer, with a normally closed brake and a balance valve equipped.	○
Slewing system	Single-row four-point ball contact slewing ring, driven by a hydraulic motor through planetary gear reducer, and with a normally closed brake fitted.	●
Operator's cab	Tiltable cab, with sliding door and adjustable seat equipped. It is equipped with safe glass and roof protective grille. Sun shade is available for windshield and roof window. Heater and air conditioner, radio, 12 V and 24 V DC outlets are standard.	●
Safety devices	Hydraulic balance valve, hydraulic relief valve, hydraulic double-way valve and LMI. Lowering limiter is equipped in winch to prevent rope over-releasing. Anti-two block is fitted on the boom head to prevent rope over-winding.	●
Counter weight	10 t 1.5t.	● ○
Hook Block	55 t hook block, 7 t hook block	●

Product parts list is as mentioned above. Please refer to the product quotation for specific parts.

Symbol explanation:

- —it means the standard configuration;
- —it means the optional configuration.

Weight



Axle	1	2	Gross vehicle weight
t	28.723	24.775	53.498 (10t counterweight)
	27.530	27.468	54.998 (10t counterweight + Optional 1.5t counterweight)



Hook	No. of lines	Weight (kg)	Remarks
55t	8	470	Single hook
7t	1	210	Single hook

Working speeds

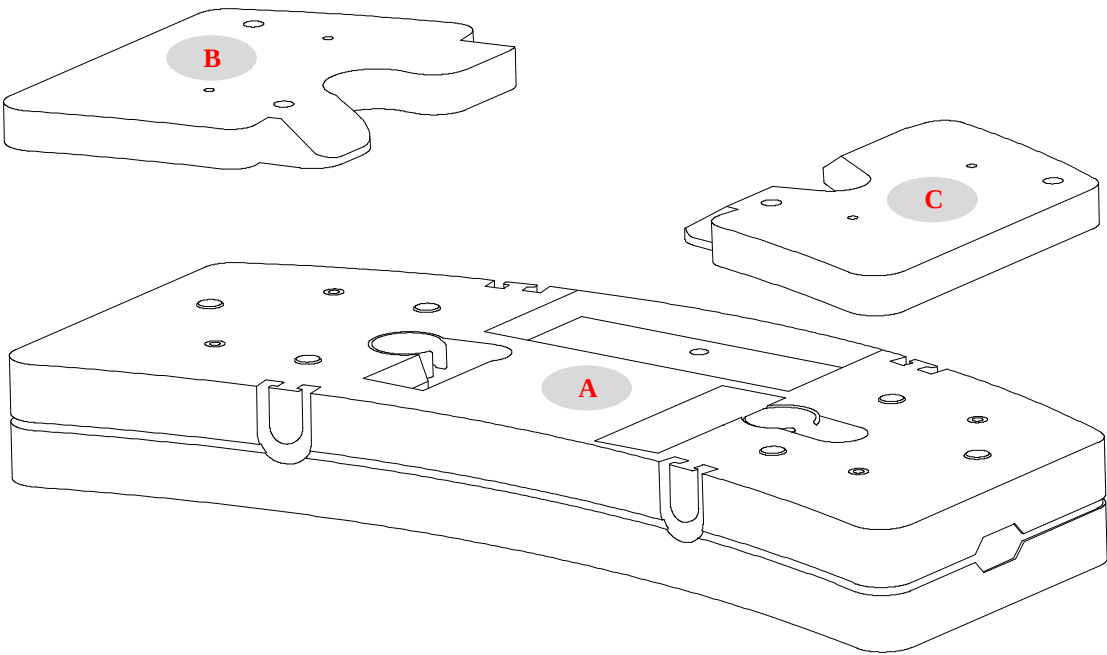


		
29.5 R 25	34.8	65%



Drive	Working speed		Max. single line pull	Rope diameter/ length
	0-145	m/min, no load, 4th layer	78kN	20mm/240m
	0-90	m/min, no load, 4th layer	78kN	20mm/150m
	0-2r/min			
	Approx. 55s for boom elevation from -1.5° to 80°			
	Approx. 110s for boom extension from 12.4m to 48m			

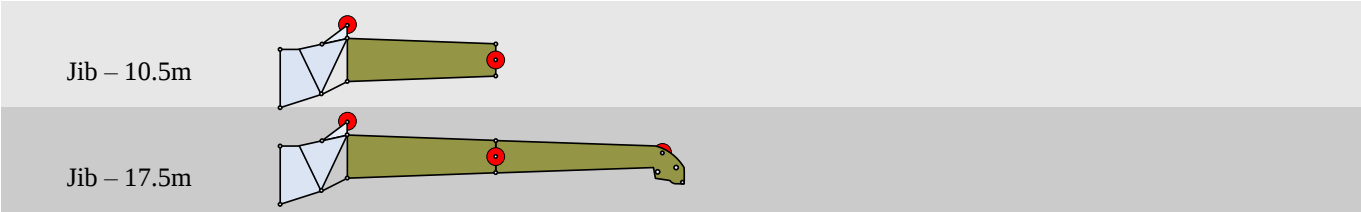
Counterweight




Counterweight	A	B (optional)	C (optional)
Size (L×W×H) mm	3260×1539×550	1372×980×124	1372×980×124
Weight t	10	0.75	0.75

Working mode	0t	10t	10t+1.5t (optional)
Combinations	—	A	A+B+C

Boom / Jib combinations

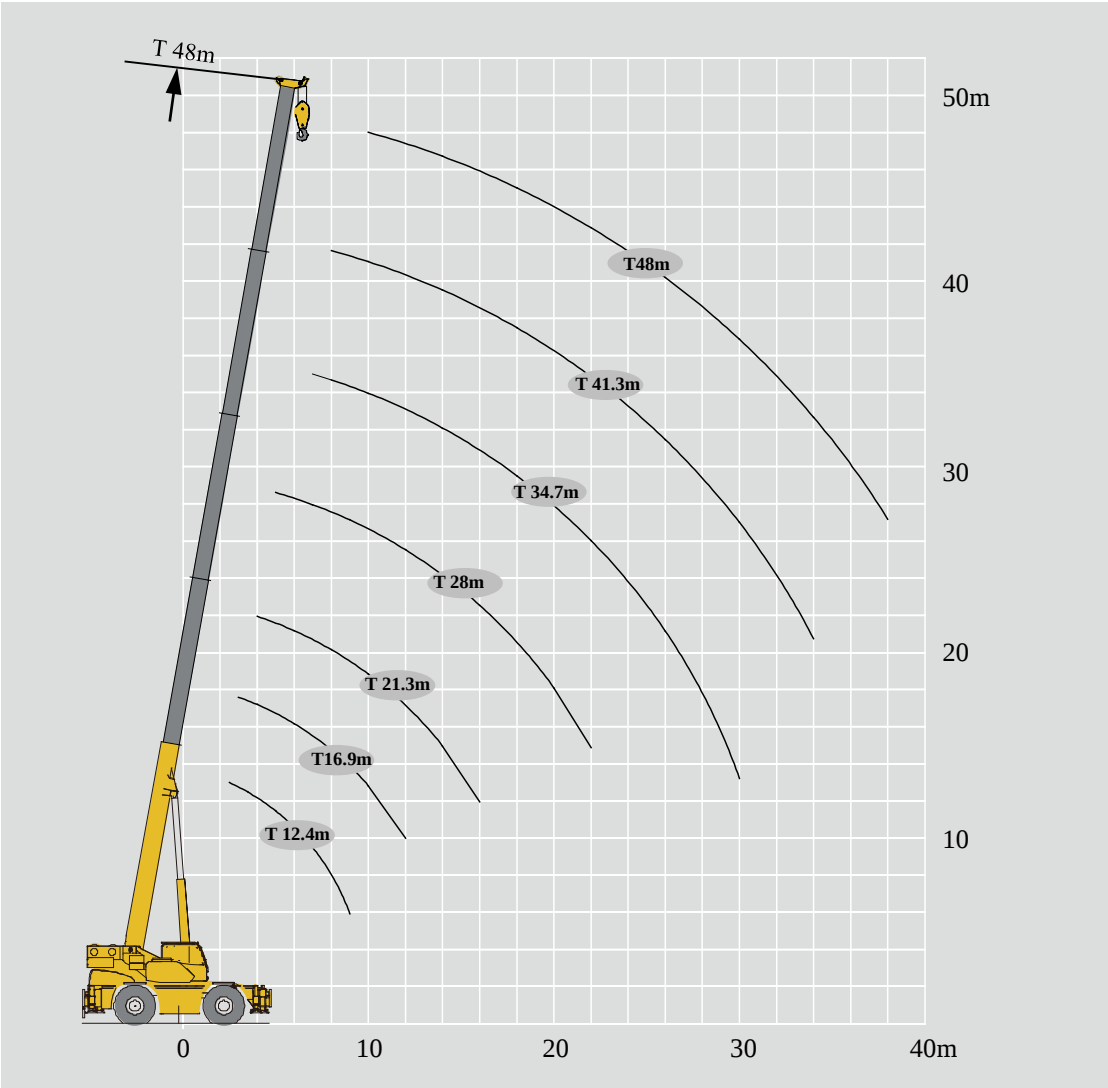



Component	Structure	Size (L×W×H) mm	Weight kg
First and second jib section assembly + Connecting bracket		Folded: 11100×900×1350	1330

Boom / Jib combinations




Telescopic boom	Telescopic boom + First jib section	Telescopic boom + First and second jib sections
12.4~48m	48m+10.5m	48m+17.5 m

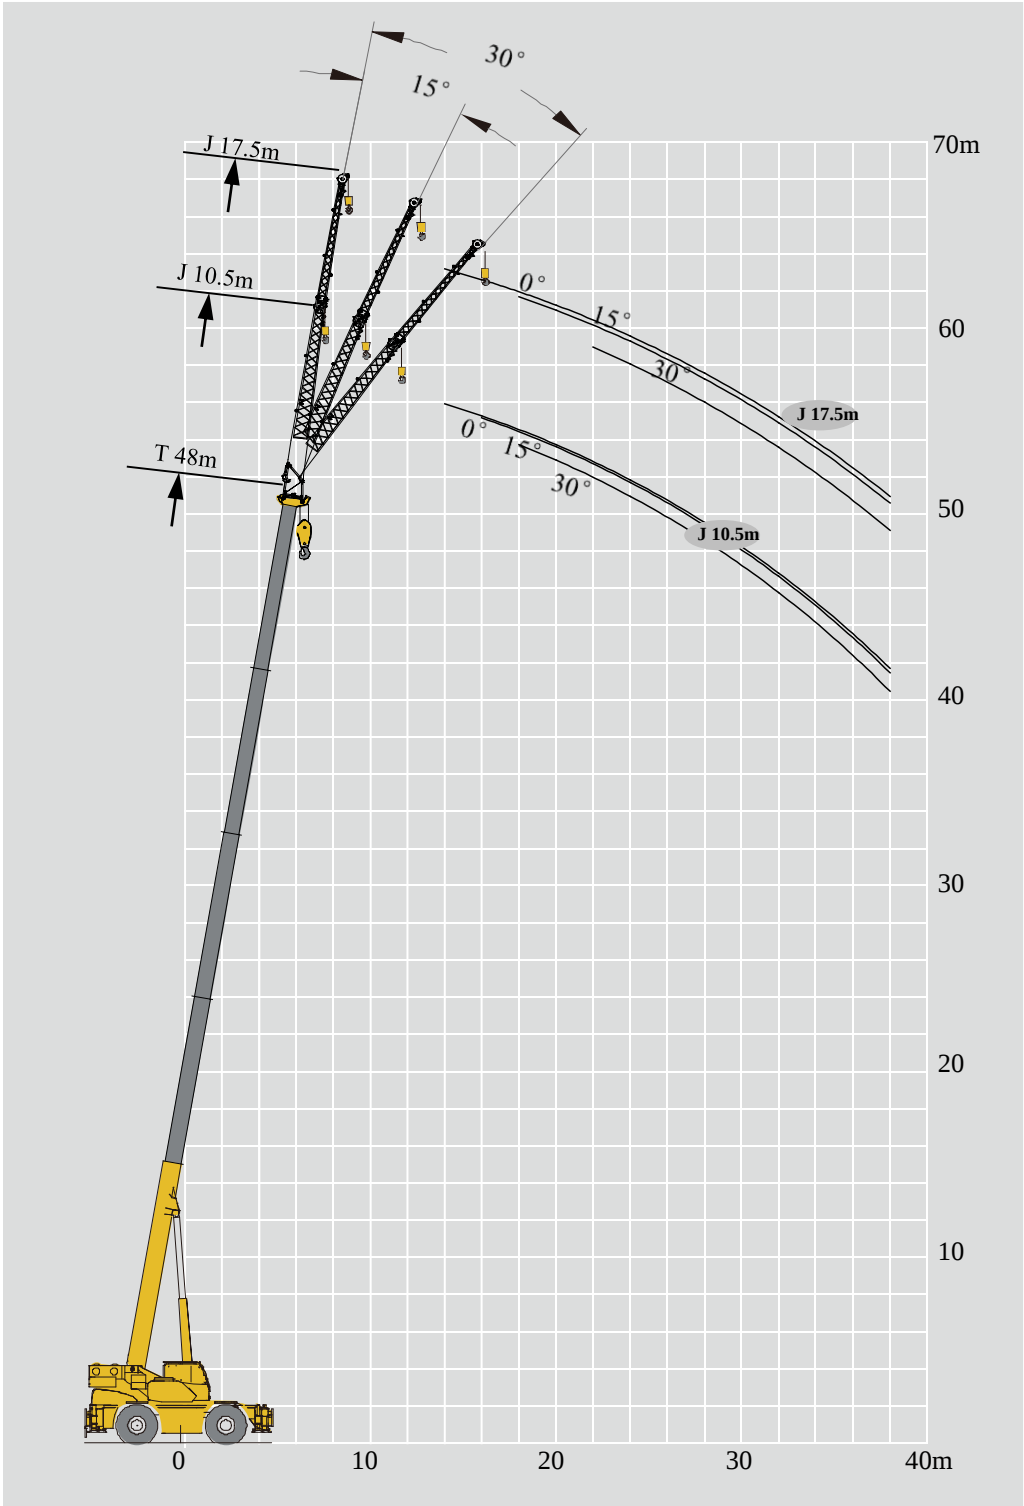



   																	
 m	12.4m	16.9m	21.3m	28m	34.7m	41.3m	48m	19.1m	25.8m	32.4m	39.1m	23.5m	30.2m	36.9m	43.6m	 m	
2.5	90.0*															2.5	
3	80.0	63.3														3	
3.5	75.0	63.3														3.5	
4	72.4	63.3	46.0					35.1								4	
5	57.9	57.9	45.0	33.5				35.0	35.3			34.8				5	
6	48.3	48.3	40.0	33.5				35.0	33.9	23.3		34.8	32.4			6	
7	41.4	41.0	38.0	31.9	25.4			35.0	31.6	21.9		34.8	29.7			7	
8	35.0	35.0	36.4	29.5	23.3	17.3		35.0	29.7	20.7	16.1	34.8	27.9	21.0		8	
9	28.8	28.0	29.5	27.5	21.9	17.3		33.2	27.9	19.5	15.4	32.3	26.7	20.1	13.1	9	
10		24.0	23.7	25.3	20.5	17.2	11.4	26.7	26.4	18.4	14.8	26.2	25.3	19.2	13.0	10	
12		16.6	16.1	17.7	18.3	16.6	11.4	18.9	20.1	16.7	13.6	18.4	19.2	17.6	12.5	12	
14			11.8	13.1	14.0	14.4	11.4	14.2	14.9	15.1	12.1	13.7	14.5	15.1	12.0	14	
16			8.7	9.9	10.8	11.3	10.3		11.7	12.4	10.8	10.5	11.3	11.9	10.6	16	
18				7.7	8.6	9.1	9.1		9.4	9.8	9.8	8.3	8.9	9.6	9.5	18	
20				6.1	6.7	7.3	7.7		7.6	8.0	8.6		7.3	7.5	8.1	20	
22				4.8	5.4	6.0	6.3			6.7	6.9		5.8	6.3	6.7	22	
24					4.5	4.9	5.3			5.6	5.8		4.8	5.4	5.6	24	
26					3.6	3.8	4.4			4.7	4.9		3.9	4.5	4.8	26	
28					2.6	3.2	3.6				4.3			3.7	4.0	28	
30					2.0	2.5	3.0				3.6			3.0	3.4	30	
32						2.0	2.3				3.1				2.7	32	
34						1.6	1.9								2.2	34	
36							1.4								1.7	36	
38							1.0								1.4	38	
2nd	0	50%	100%	100%	100%	100%	100%	0%	0%	0%	0%	50%	50%	50%	50%	2nd	
3rd	0	0	0	25%	50%	75%	100%	25%	50%	75%	100%	25%	50%	75%	100%	3rd	
4th	0	0	0	25%	50%	75%	100%	25%	50%	75%	100%	25%	50%	75%	100%	4th	
5th	0	0	0	25%	50%	75%	100%	25%	50%	75%	100%	25%	50%	75%	100%	5th	



*The lifting load with a * followed is available only when the boom sheave block is used together with the single top, with 13 parts of line.



	 12.4-48m T  7.8m×7.7m  360°  10t															
	12.4m	16.9m	21.3m	28m	34.7m	41.3m	48m	19.1m	25.8m	32.4m	39.1m	23.5m	30.2m	36.9m	43.6m	
2.5	90.0*															2.5
3	80.0	63.3														3
3.5	75.0	63.3														3.5
4	72.4	63.3	46.0					35.1								4
5	57.9	57.9	45.0	33.5				35.0	35.3			34.8				5
6	48.3	48.3	40.0	33.5				35.0	33.9	23.3		34.8	32.4			6
7	41.4	41.0	38.0	31.9	25.4			35.0	31.6	21.9		34.8	29.7			7
8	35.0	35.0	35.0	29.5	23.3	17.3		35.0	29.7	20.7	16.1	34.8	27.9	21.0		8
9	28.7	28.0	27.9	27.5	21.9	17.3		31.5	27.9	19.5	15.4	30.6	26.7	20.1	13.1	9
10		22.4	22.0	23.9	20.5	17.2	11.4	25.3	26.4	18.4	14.8	24.5	25.3	19.2	13.0	10
12		15.3	14.9	16.7	18.3	16.6	11.4	17.7	19.0	16.7	13.6	16.7	18.1	17.6	12.5	12
14			10.6	12.3	14.0	13.7	11.4	13.2	14.1	14.8	12.1	12.2	13.6	14.2	12.0	14
16			7.7	9.2	10.8	10.6	10.3		11.0	11.7	10.8	9.3	10.6	11.1	10.6	16
18				7.1	7.8	8.4	8.8		8.8	9.2	9.7	7.0	8.2	8.9	9.3	18
20				5.5	6.2	6.8	7.2		7.2	7.5	8.1		6.7	7.0	7.6	20
22				4.2	4.9	5.5	5.9			6.2	6.3		5.3	5.8	6.3	22
24					3.9	4.5	4.8			5.2	5.3		4.3	4.8	5.2	24
26					3.1	3.4	4.0			4.4	4.4		3.5	4.0	4.4	26
28					2.4	2.8	3.3				3.9			3.2	3.6	28
30					1.8	2.2	2.7				3.2			2.6	3.0	30
32						1.8	1.9				2.8				2.3	32
34						1.3	1.7								1.9	34
36							1.2								1.5	36
38							0.9								1.1	38
2nd	0	50%	100%	100%	100%	100%	100%	0%	0%	0%	0%	50%	50%	50%	50%	2nd
3rd	0	0	0	25%	50%	75%	100%	25%	50%	75%	100%	25%	50%	75%	100%	3rd
4th	0	0	0	25%	50%	75%	100%	25%	50%	75%	100%	25%	50%	75%	100%	4th
5th	0	0	0	25%	50%	75%	100%	25%	50%	75%	100%	25%	50%	75%	100%	5th



* The lifting load with a * followed is available only when the boom sheave block is used together with the single top, with 13 parts of line.



48m T 10.5m J 7.8m×7.7 m 360° 11.5t					48 m+10.5m				
					0°	15°	30°		
14					5.5			14	
16					5.5	4.5		16	
18					5.5	4.5	2.6	18	
20					5.5	4.4	2.5	20	
22					5.2	4.1	2.4	22	
24					4.5	3.8	2.2	24	
26					3.8	3.6	2.1	26	
28					3.1	3.2	2.0	28	
30					2.5	2.6	2.0	30	
32					2.2	2.1	1.9	32	
34					1.8	1.8	1.8	34	
36					1.4	1.5	1.5	36	
38					1.0	1.1	1.3	38	


48m T 17.5m J 7.8m×7.7 m 360° 11.5t					48 m+17.5m				
					0°	15°	30°		
14					2.8			14	
16					2.8			16	
18					2.8	2.1		18	
20					2.8	2.0		20	
22					2.8	1.8	1.1	22	
24					2.8	1.7	1.1	24	
26					2.7	1.6	0.9	26	
28					2.5	1.5	0.9	28	
30					2.3	1.3	0.9	30	
32					2.1	1.2	0.8	32	
34					1.8	1.2	0.8	34	
36					1.5	1.1	0.8	36	
38					1.2	1.1	0.8	38	

 48m T  10.5m J  7.8m×7.7 m  360°  10t 48 m+10.5m									
 m		0°	15°	30°			 m		
14		5.5					14		
16		5.5	4.5				16		
18		5.5	4.5	2.6			18		
20		5.5	4.4	2.5			20		
22		5.2	4.1	2.4			22		
24		4.5	3.8	2.2			24		
26		3.8	3.6	2.1			26		
28		3.1	3.2	2.0			28		
30		2.5	2.6	2.0			30		
32		2.0	2.1	1.8			32		
34		1.6	1.6	1.7			34		
36		1.2	1.3	1.4			36		
38		0.9	1.0	1.2			38		

 48m T  17.5m J  7.8m×7.7 m  360°  10t 48 m+17.5m									
 m		0°	15°	30°			 m		
14		2.8					14		
16		2.8					16		
18		2.8	2.1				18		
20		2.8	2.0				20		
22		2.8	1.8	1.1			22		
24		2.8	1.7	1.1			24		
26		2.7	1.6	0.9			26		
28		2.5	1.5	0.9			28		
30		2.3	1.3	0.9			30		
32		2.0	1.1	0.7			32		
34		1.6	1.1	0.7			34		
36		1.3	1.0	0.7			36		
38		1.0	1.0	0.7			38		

Description of symbols

Symbol glossary

	Outriggers		Axle
	Radius		Driving speed
	Boom angle		Grade ability
	Boom length		Tires
	Hook block		Counterweight
	360° rotation		Superstructure
	Winch		Rough terrain crane

Crane specific symbols

	Boom		Jib
--	------	---	-----

Table of main technical parameters

Category	Item		Unit	Parameter		Allowance
Dimensions	Outline size (length×width×height)		mm	14468×3280×3898		±1%
	Wheel base		mm	4000		±1%
	Track (Front/ Rear)		mm	2520/2520		±1%
	Front/ Rear overhang		mm	2466/2383		±1%
	Front/ Rear extension		mm	5484/135		±1%
Weight	Gross vehicle weight		kg	53498 (10t counterweight)	54998 (11.5t counterweight)	±3%
	Axle load	1st axle	kg	28723	27530	±3%
		2nd axle	kg	24775	27468	±3%
Power	Engine model		——	SC9DK260.1G3/QSB6.7-C260-30		—
	Engine rated power/rpm		kW/(r/min)	192/2000、194/2200		—
	Engine rated torque/rpm		N.m/(r/min)	1110/ (1200~1600) 、900/1500		—
Travel	Max. travel speed		km/h	≥34.8		—
	Min. travel speed		km/h	2		—
	Min. turning diameter		m	≤13		—
	Min. ground clearance		mm	550		±1%
	Approach angle		°	24		±1°
	Departure angle		°	24		±1°
	Braking distance (at 24 km/h)		m	≤9		—
	Max. grade ability		%	≥62		—

Table of main technical parameters

Category	Item		Unit	Parameter	Allowance
Main performance	Max. total rated lifting capacity		t	90	±5%
	Min. rated working radius		m	2.5	±1%
	Turning radius at turntable tail	Counterweight	mm	4544	±1%
	Max. load moment	Base boom	kN.m	2840	±5%
		Fully-extended boom	kN.m	1615	±5%
	Outrigger span	Longitudinal	m	7.8	±1%
		Lateral	m	7.7	±1%
	Hoist height	Base boom	m	13	±1%
		Fully-extended boom	m	48	±1%
		Fully-extended boom + Jib	m	63.1	±1%
	Boom length	Base boom	m	12.4	±1%
		Fully-extended boom	m	48	±1%
		Fully-extended boom + Jib	m	65.5	±1%
	Jib offset angle		°	0°、15°、30°	—
Working speed	Boom raising time		s	≤55	—
	Boom fully extending time		s	≤110	—
	Max. slewing speed		r/min	≥2	—
	Outrigger extending and retracting time	Outrigger beam	Retracting	s	≤35
			Extending	s	≤40
		Outrigger jack	Retracting	s	≤40
			Extending	s	≤55
	Hoisting speed (single line, 4th layer, no load)	Main winch	m/min	≥145	—
		Auxiliary winch	m/min	≥90	—

1. The total rated loads given in the rated load charts are the maximum lifting capacity when the crane is set up on firm and level ground, which includes the weight of the hook block and slings. The weight of above-mentioned devices should be deducted from the rated lifting load.
2. The working radius shown in the rated load charts is the radius when the load is lifted off the ground, and it is the actual value including loaded boom deflection. Take boom deflection into consideration before beginning a lifting operation.
3. A lifting operation is permissible only when the wind force is below grade 5 (instantaneous wind speed is 14.1 m/s, wind pressure is 125 N/m²).
4. Before beginning lifting operation, the operator should know the weight of the load to be lifted and its working range, and then select proper working conditions. Never operate the crane beyond the limit shown in the chart. Use the lower value from the chart when the boom length or working radius is between the range of values.
5. Observe the boom angle limit. Never operate the crane with the boom angle beyond the recommended limit even if a load is not being carried. Otherwise, the crane will tip.
6. The boom should be extended according to the telescoping code shown by digits, which means the percentage of boom sections extended.



Add: 31-33 Westpool drive
Hallam, Victoria 3803,
Australia.

Mobile :
+61 455 111 174



<http://www.xcmg.net.au>

This print does not belong to the contract. We reserve the right to modify the design (such as product model, parameters and configuration) without notice for improvement. The pictures are just for reference. The product in the picture may not be standard configuration. Some parts need to be purchased separately. Conform to the local laws for license application and road traveling.