



SOLID
TO SUCCEED

ARTICULATED BOOM LIFT

XGA26K



The print does not belong to the contract, nor a part of the vehicle purchase contract. We reserve the right to revise the product model, parameters, configuration based on the continuous improvement requirements of the product, without prior notice. Pictures are for reference only, and the specific product shall depend on the real product.

XGA26K

Articulated boom lift


FEATURES

MEASUREMENTS

26.6m working height
Up to 150/256kg lift capacity

PRODUCTIVITY

2.4m x 0.9m working platform
3 entry type platform with side swing doors
160° platform rotation
4-wheel drive
Axle balance system
Platform and chassis emergency stop
Emergency power unit
Axle balance pressure detection system
4-wheel braking system

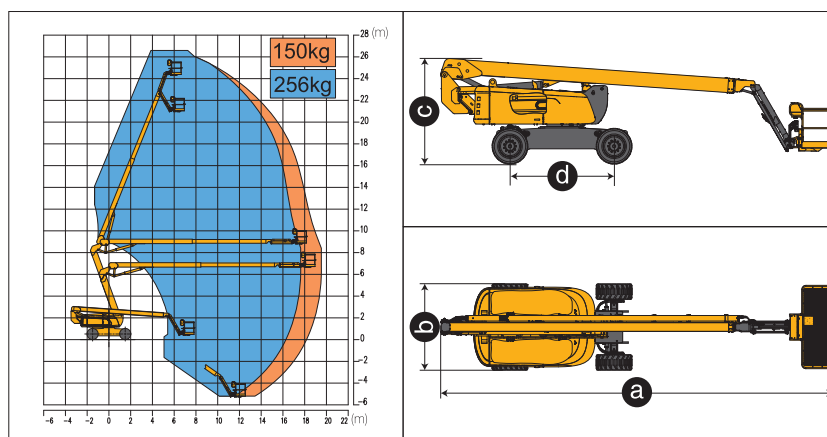

POWER

12V DC emergency power
Cold start components
Engine air pre-filter kit
Engine condition monitoring and start protection device
Kubota Euro stage V emission

OPTIONS

Tool tray
Work light assembly
Foam-filled rough terrain tires

Item	Unit	XGA26K
Working height	m	26.6
Platform height	m	24.6
Working radius	m	19.5
Lift capacity	kg	150/256
Occupant capacity	-	2
1st Boom luffing range	°	-1~+70
2nd Boom luffing range	°	-35~+68
Fly jib luffing range	°	-65~+70
Turntable rotation	°	360
Platform rotation	°	160
Drive speed (retracted/extended)	km/h	5/0.6
Turning radius (inside/outside)	m	2.2/4.4
Tailswing	mm	1330
Ground clearance	mm	380
Gradeability	%	45
Tires	-	18-625
Power source	-	Kubota V2607
Rated power	kW/(r/min)	48/(2400)
Fuel tank	L	180
Hydraulic tank	L	150
Weight	kg	18100
Platform size	mm	2400x900
a Length (transportation)	mm	11760/9900
b Width	mm	2490
c Height	mm	2950
d Wheelbase	mm	3000

SOLID TO SUCCEED