

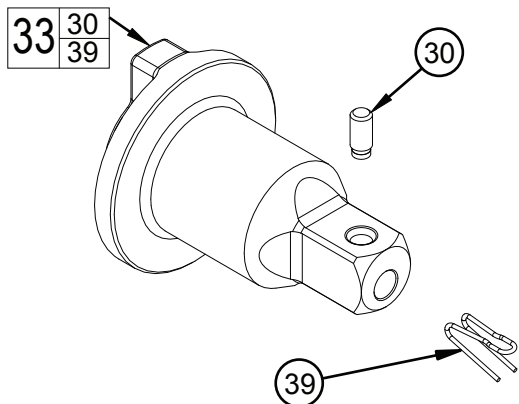


FIG.	PART NO.	DESCRIPTION OF PART	NO.REQ.
30	44-60-1170	Detent Pin	(1)
33	14-73-0145	Anvil Assembly	(1)
39	44-50-8320	Detent Spring	(1)




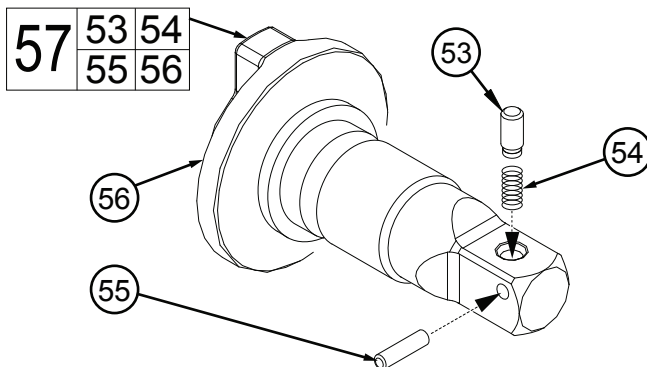


FIG.	PART NO.	DESCRIPTION OF PART	NO.REQ.
53	44-60-0567	Detent Pin	(1)
54	40-50-0895	Detent Spring	(1)
55	44-60-0465	Pivot Pin	(1)
56	-----	1/2" Square Anvil	(1)
57	14-73-0455	Anvil Assembly	(1)

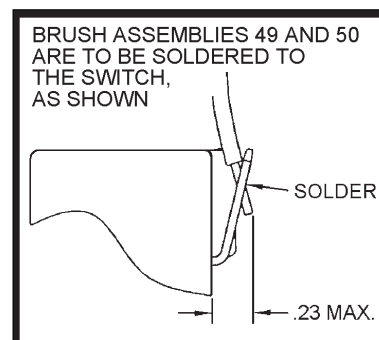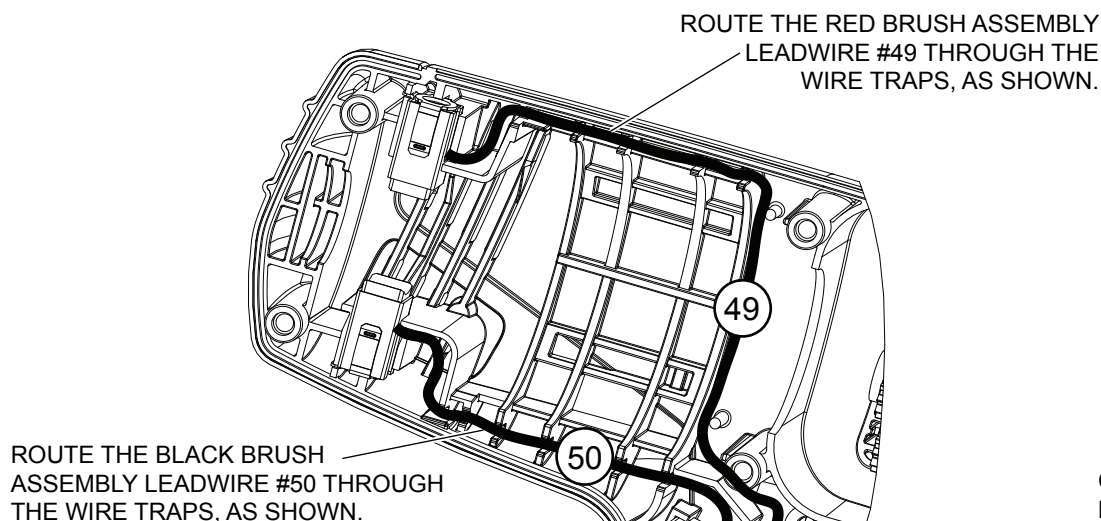


CONNECT THE TERMINALS OF LEADWIRE ASSEMBLIES 47 AND 48 TO THE TABS ON THE BOTTOM OF THE SWITCH AND SOLDER.

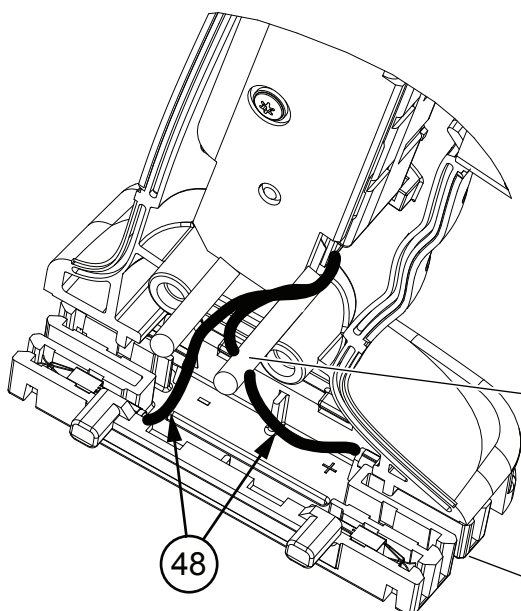

⚠ WARNING
SWITCH POLARITY SENSITIVE
 If wired incorrectly with connector block #16, switch #17 will be damaged and destroyed!

THESE VIEWS OF THE CONNECTOR BLOCK ASSEMBLY ARE SHOWN WITHOUT THE CONNECTOR BLOCK COVER FOR CLARITY.

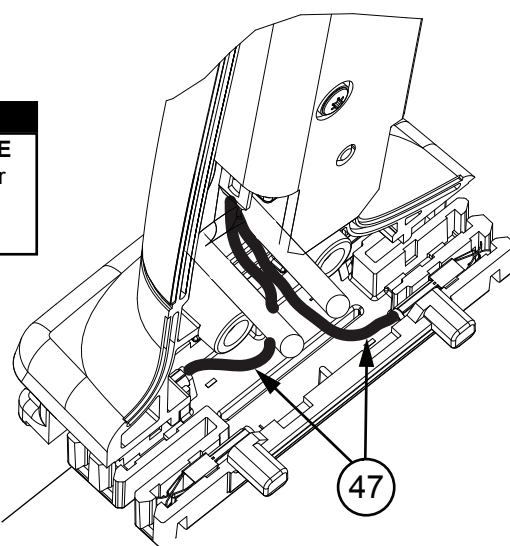

WIRING SPECIFICATIONS

Wire No.	Wire Color	Origin or Gauge	Length	Terminals, Connectors and 1 or 2 End Wire Preparation
47	Black	23-94-0279	-----	Leadwire Assembly.
48	Red	23-94-0179	-----	Leadwire Assembly.
49	Red	22-18-2080	-----	Carbon Brush Assembly - Red
50	Black	22-18-1980	-----	Carbon Brush Assembly - Black

BULK LEAD WIRE - BULLETIN NO. 58-01-0003

TERMINAL DESCRIPTION

Code	Part No.	Qty.