



RENTAL EQUIPMENT SPECIFICATIONS

2024

UNITED
Forklift and
Access Solutions

It's all about you




KONECRANES

Haulotte

ALMACRAWLER



Watch our
Corporate Video

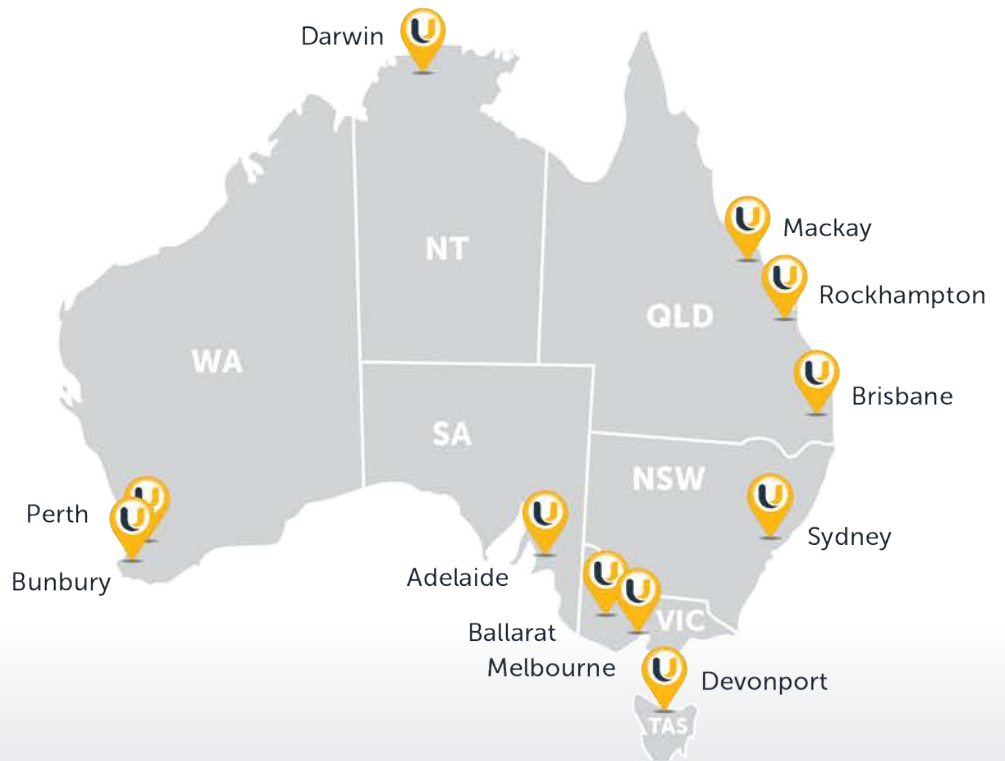

Proud members of the following industry associations



Watch our Product Videos
Use your phone camera or a QR code
scanner app to scan the codes

Disclaimer:

Not all equipment mentioned may be available at each United branch. Manufacturers reserve the right to modify equipment specifications at any time without given notice. United does not warrant that the information contained within is complete and accurate without error. Please refer to manufacturer websites for the most up to date specifications.



COMPLETE RENTAL SOLUTIONS TO SUIT YOUR NEEDS



Whatever your lifting requirements or access needs, United has the most extensive range of reliable and well-maintained forklifts and access equipment for hire to suit most applications.

Choose from our complete range of **forklifts**, **container lift trucks**, **scissor lifts**, **boom lifts** and **telehandlers**, which are ready for immediate delivery to your business or site Australia-wide.



Extensive Range

Choose from Australia's largest range of forklifts and access equipment to suit all your needs.



Flexible Hire

Rent equipment for a day, week, month or up to five years at a great competitive rate.



Fast Delivery

We can organise fast delivery to your site within 24 hours across Australia within the metro areas.



24/7 Backup Support

Rest assured our responsive service vehicles are on call 24/7 for your total piece of mind.



SELF PROPELLED VERTICAL LIFTS

Platform Height Metres Feet	Models	Horizontal Outreach	Up-and-Over Height	Lifting Capacity	Platform Size	Overall Width	Stowed Height	Stowed Length	Gradeability	Weight
3.80 m 12' 6"	Haulotte Star 6 Crawler	0.44 m	-	200 kg	0.74 x 1.00 m	0.76 m	1.72 m	1.44 m	25%	1,150 kg
4.00 m 13' 1"	Haulotte Star 6	-	-	230 kg	0.77 x 1.38 m	0.79 m	1.75 m	1.40 m	25%	835 kg
5.94 m 19' 5"	JLG 20 MVL	-	-	160 kg	0.66 x 0.66 m	0.80 m	1.98 m	1.36 m	20%	1,090 kg
6.70 m 21' 12"	Haulotte Star 8	3.00 m	6.70 m	200 kg	0.78 x 0.98 m	1.00 m	1.99 m	2.70 m	25%	2,585 kg
8.00 m 26' 2"	Haulotte Star 10	3.00 m	8.00 m	200 kg	0.78 x 0.98 m	1.00 m	1.99 m	2.70 m	25%	2,677 kg




➤ Haulotte Star 6 Crawler
/ Star 6



➤ JLG 20 MVL



➤ Haulotte Star 8 / 10

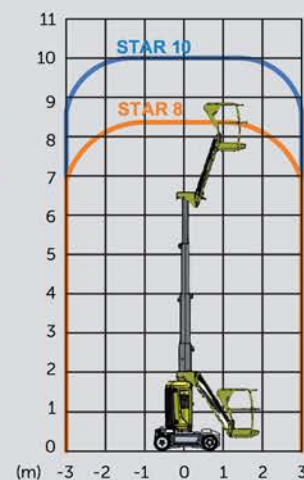

PUSH AROUND VERTICAL LIFTS

Platform Height Metres Feet	Models	Lifting Capacity	Platform Size	Overall Width Stowed With Stabilisers	Stowed Height	Stowed Length	Gradeability	Weight
8.70 m 28' 7"	Haulotte Quick Up 11	159 kg	0.68 x 0.66 m	0.80 m 1.55 m	1.98 m	1.34 m	0%	422 kg
10.30 m 33' 9"	Haulotte Quick Up 12	136 kg	0.68 x 0.66 m	0.80 m 2.06 m	1.98 m	1.40 m		457 kg
12.03 m 39' 5"	Haulotte Quick Up 14	136 kg	0.68 x 0.66 m	0.80 m 2.33 m	2.80 m	1.42 m		557 kg



➤ Haulotte Quick Up 11 / 12 / 14



ELECTRIC SCISSOR LIFTS



All models include **non-marking tyres** • Rough Terrain

Platform Height Metres Feet	Model	Lifting Capacity	Platform Size		Overall Width	Stowed Height		Stowed Length	Gradeability	Weight
			Deck Stowed	Deck Extended		Rails Up	Rails Down			
4.35 m 14' 3"	Haulotte Optimum 6	270 kg	0.68 x 1.68 m	0.76 x 2.59 m	0.76 m	1.91 m	-	1.88 m	25%	1,290 kg
5.77 m 18' 11"	Haulotte Optimum 8	230 kg	0.74 x 1.72 m	0.74 x 2.58 m	0.79 m	1.98 m	-	1.90 m	25%	1,520 kg
5.80 m 19' 0"	Haulotte Optimum 8.1	230 kg	0.70 x 1.68 m	0.70 x 2.59 m	0.76 m	2.00 m	-	1.90 m	25%	1,572 kg
6.20 m 20' 4"	Haulotte Compact 8	350 kg	0.81 x 2.31 m	0.81 x 3.23 m	0.81 m	2.00 m	1.13 m	2.49 m	23%	1,655 kg
8.00 m 26' 2"	Haulotte Compact 10N.1	230 kg	0.80 x 2.30 m	0.80 x 3.22 m	0.81 m	2.17 m	1.33 m	2.48 m	23%	2,445 kg
8.15 m 26' 8"	Haulotte Compact 10	450 kg	1.20 x 2.31 m	1.20 x 3.23 m	1.20 m	2.26 m	1.57 m	2.49 m	23%	2,330 kg
8.28 m 27' 2"	Haulotte Compact 10 RTE	565 kg	1.45 x 2.45 m	1.45 x 3.70 m	1.78 m	2.44 m	1.59 m	2.64 m	25%	3,305 kg
10.00 m 32' 9"	Haulotte Compact 12	300 kg	1.20 x 2.31 m	1.20 x 3.23 m	1.20 m	2.39 m	1.70 m	2.49 m	23%	2,470 kg
10.06 m 33' 0"	Haulotte Compact 12 RTE	450 kg	1.45 x 2.45 m	1.45 x 3.70 m	1.78 m	2.56 m	1.71 m	2.64 m	25%	3,675 kg
11.85 m 38' 8"	Haulotte Compact 14	350 kg	1.20 x 2.31 m	1.20 x 3.23 m	1.20 m	2.50 m	2.08 m	2.49 m	23%	3,168 kg
11.97 m 39' 3"	JLG 4045 R	350 kg	1.05 x 2.43 m	1.05 x 3.34 m	1.15 m	2.54 m	1.91 m	2.71 m	25%	3,175 kg
12.19 m 39' 11"	JLG 4069 LE (Wide)	360 kg	1.65 x 2.92 m	1.65 x 3.83 m	1.75 m	2.83 m	2.04 m	3.07 m	35%	5,300 kg
13.00 m 42' 8"	Haulotte HS15 E PRO	750 kg	1.89 x 3.82 m	1.89 x 4.80 m	2.30 m	3.05 m	2.19 m	4.40 m	45%	7,480 kg
15.00 m 49' 3"	Haulotte HS18 E PRO	750 kg	1.89 x 3.82 m	1.89 x 4.80 m	2.30 m	3.15 m	2.29 m	4.40 m	40%	8,010 kg

DIESEL SCISSOR LIFTS



All models are **rough terrain** • Non-marking tyres

Platform Height Metres Feet	Model	Lifting Capacity	Platform Size		Overall Width	Stowed Height		Stowed Length	Grade- ability	Weight
			Deck Stowed	Deck Extended		Rails Up	Rails Down			
8.15 m 26' 8"	Haulotte Compact 10 DX	565 kg	1.45 x 2.45 m	1.45 x 3.70 m	1.80 m	2.44 m	1.59 m	3.17 m	40%	3,440 kg
10.00 m 32' 9"	Haulotte H12 SX	700 kg	1.89 x 3.91 m	1.89 x 6.00 m	2.25 m	2.59 m	1.71 m	4.18 m	45%	5,440 kg
10.06 m 33' 0"	JLG 330 LRT	905 kg	2.00 x 3.92 m	2.01 x 5.14 m	2.31 m	2.77 m	1.85 m	4.88 m	45%	6,250 kg
10.15 m 33' 3"	Haulotte Compact 12 DX	450 kg	1.45 x 2.45 m	1.45 x 3.70 m	1.78 m	2.56 m	1.70 m	3.17 m	40%	4,060 kg
13.00 m 42' 7"	Haulotte H15 SX	500 kg	1.89 x 4.00 m	1.89 x 6.00 m	2.25 m	2.77 m	1.91 m	4.18 m	45%	6,300 kg
13.11 m 43' 0"	JLG 4394 RT	567 kg	2.18 x 3.81 m	2.18 x 6.25 m	2.39 m	2.89 m	2.19 m	3.86 m	45%	7,150 kg
13.11 m 43' 0"	JLG 430 LRT	565 kg	2.00 x 3.92 m	2.01 x 5.14 m	2.31 m	2.89 m	2.08 m	4.88 m	45%	6,800 kg
16.00 m 52' 5"	Haulotte H18 SX	500 kg	1.89 x 4.00 m	1.89 x 6.00 m	2.25 m	2.99 m	2.11 m	4.18 m	45%	7,240 kg

BI-LEVELLING TRACKED SCISSOR LIFT



Platform Height Metres Feet	Model	Lifting Capacity	Platform Size		Overall Width	Stowed Height		Stowed Length	Gradeability	Weight
			Deck Stowed	Deck Extended		Rails Up	Rails Down			
5.90 m 19' 4"	Athena 850	250 kg	0.78 x 1.50 m	0.78 x 2.25 m	1.30 m	2.29 m	1.99 m	1.94 m	25%	1,990 kg
7.90 m 25'9"	Athena 870	250 kg	1.20 x 1.50 m	1.20 x 2.35 m	1.30m	2.28 m	1.98 m	1.94 m	25%	2,460kg
8.00 m 26' 2"	Athena 1090	300 kg	1.30 x 1.80 m	1.30 x 2.92 m	1.46 m	2.61 m	2.09 m	2.26 m	25%	2,900kg

SCISSOR LIFT & TRAILERS



Platform Height Metres Feet	Model	Lifting Capacity	Platform Size		Overall Width	Stowed Height	Stowed Length	Gradeability	Weight	
			Deck Stowed	Deck Extended					Scissor	With Trailer
5.77 m 18' 93"	Haulotte Optimum 8 AC + Trailer	230 kg	0.74 x 1.72 m	0.74 x 2.58 m	0.79 m	1.98 m	1.90 m	25%	1,520 kg	1,990 kg
5.90 m 19' 36"	Athena 850 + Trailer	250 kg	0.78 x 1.50 m	0.78 x 2.25 m	1.30 m	2.29 m	1.94 m	25%	1,990 kg	2,760 kg

Haulotte Optimum 8



Athena 850



Bi-levelling tracked scissor lift
ideal for sloping terrain




TRAILER MOUNTED & SELF-PROPELLED BOOMS


• Compact • AC Power to Platform • Automatic Levelling • Self-Drive

Platform Height Metres	Feet	Models	Horizontal Outreach	Up & Over Height	Lifting Capacity	Platform Size	Overall Width		Stowed Height	Stowed Length	Weight
							Stowed	With Stabilisers			
10.60 m	34' 9"	Snorkel MHP 13	5.60 m	5.65 m	250 kg	0.78 x 1.25 m	1.58 m	3.70 m	2.05 m	5.99 m	1,200 kg
11.30 m	37' 0"	Haulotte HTA 13P	6.90 m	5.80 m	227 kg	0.76 x 1.22 m	1.66 m	3.00 m	1.95 m	4.95 m	1,542 kg
13.40 m	43' 11"	Snorkel MHP 15	6.45 m	6.90 m	227 kg	0.78 x 1.25 m	1.77 m	3.70 m	2.10 m	7.45 m	1,500 kg


▶ Snorkel MHP 13

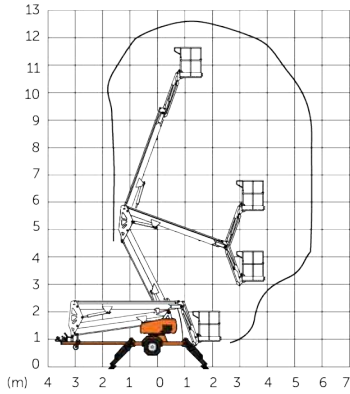

▶ Haulotte HTA 13P

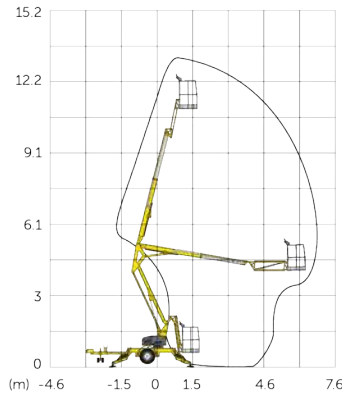


▶ Snorkel MHP 15

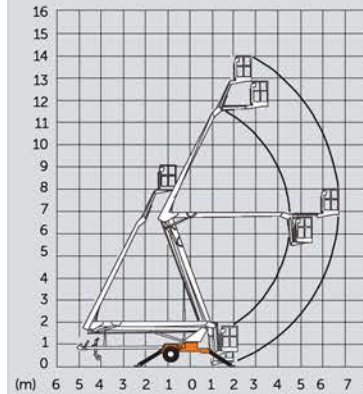




TRACKED TELESCOPIC BOOM LIFTS

• Full Electric Drive

Platform Height Metres	Feet	Models	Horizontal Outreach	Lifting Capacity	Platform Size	Overall Width		Stowed Height	Gradability	Stowed Length	Weight
						Stowed	Working				
12.20 m	40'	Jibbi 1270 EVO	8.20 m	230kg	0.70 x 1.80 m	1.15 m	1.95 m	1.99 m	25%	3.80 m	3,600 kg
14.00 m	45' 1"	Jibbi 1670 EVO	8.50 m	230 kg	0.70 x 1.40 m	1.35 m	1.90 - 2.45 m	1.99 m	25%	5.10 m	3,850 kg
17.90 m	58' 7"	Jibbi 1890 PRiMO	9.92 m	250 kg	0.70 x 1.80 m	2.20 m	-	2.16 m	25%	5.86 m	5,870 kg

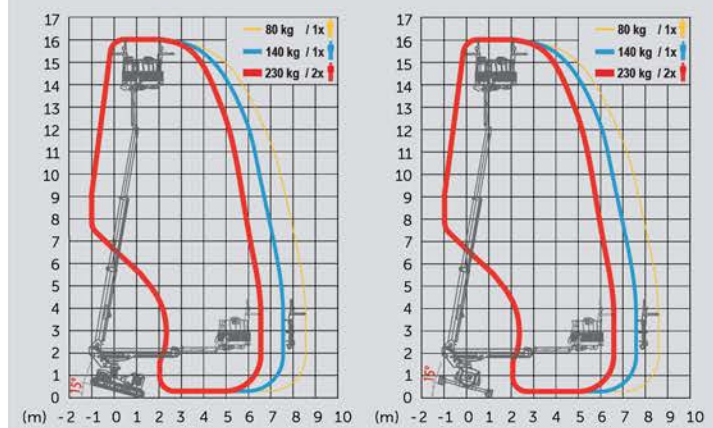

▶ Jibbi 1270 EVO

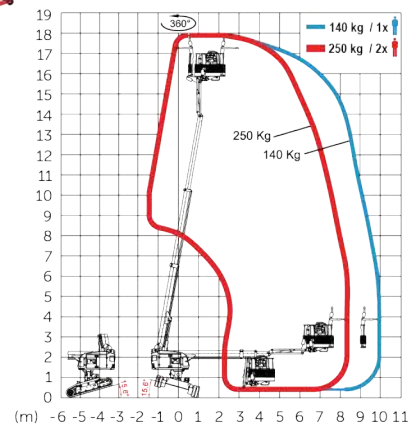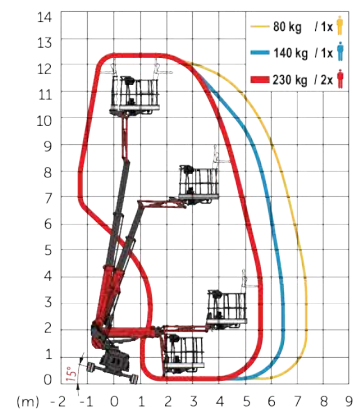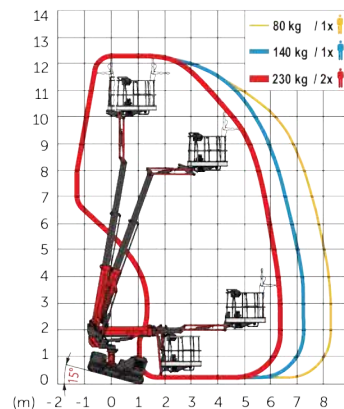


TELESCOPIC BOOM LIFTS




Platform Height Metres Feet	Model	Lifting Capacity	Platform Size	Overall Width		Stowed Height	Stowed Length	Gradeability	Weight
				Stowed	Axles Ext.				
13.44 m 44' 1"	Haulotte H16 TPX	230 kg	0.80 x 1.80 m	2.30 m	-	2.20 m	8.43 m	50%	6,800 kg
14.01 m 45' 1"	Haulotte HT16 RTJ PRO	250 / 350 kg	0.76 x 1.83 m	2.29 m	-	2.47 m	9.16 m	45%	7,930 kg
14.02 m 45' 11"	JLG 460 SJ	230 kg	0.91 x 2.44 m	2.30 m	-	2.39 m	8.84 m	45%	7,930 kg
20.31 m 66' 7"	JLG 660 SJ	230 kg	0.91 x 2.44 m	2.42 m	-	2.56 m	10.21 m	45%	13,550 kg
20.50 m 67' 3"	Haulotte HT23 RTJ PRO	230 / 450 kg	0.91 x 2.44 m	2.47 m	-	2.70 m	10.40 m	40%	13,400 kg
25.90 m 84' 12"	Haulotte HT28 RTJ PRO	230 / 350 kg	0.91 x 2.44 m	2.48 m	-	2.85 m	13.05 m	45%	18,100 kg
26.21 m 85' 11"	JLG 860 SJ	230 kg	0.91 x 2.44 m	2.49 m	-	3.05 m	12.19 m	45%	17,200 kg
40.20 m 131' 90"	Haulotte HT43 RTJ PRO	230 / 450 kg	0.91 x 2.44 m	2.50 m	3.30 m	3.05 m	14.80 m	40 %	21,400 kg
41.15 m 135' 0"	JLG 1350 SJP	227 / 454 kg	0.91 x 2.44 m	2.49 m	3.82 m	3.05 m	11.86 m	45%	20,400 kg
45.75 m 150' 1"	JLG 1500 SJP	230 / 450 kg	0.91 x 2.44 m	2.49 m	3.81 m	3.05 m	13.11 m	40%	21,772 kg


Haulotte H16 TPX

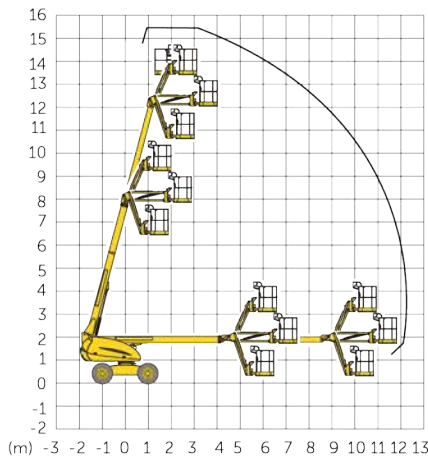


Haulotte HT16 RTJ PRO

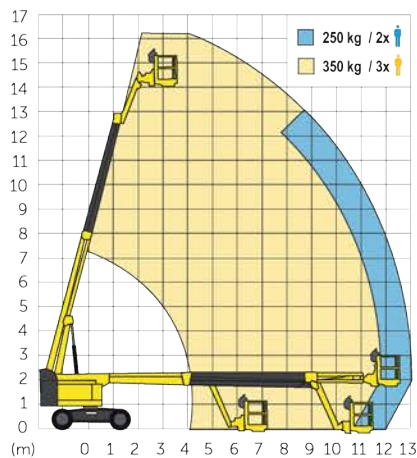


JLG 460 SJ

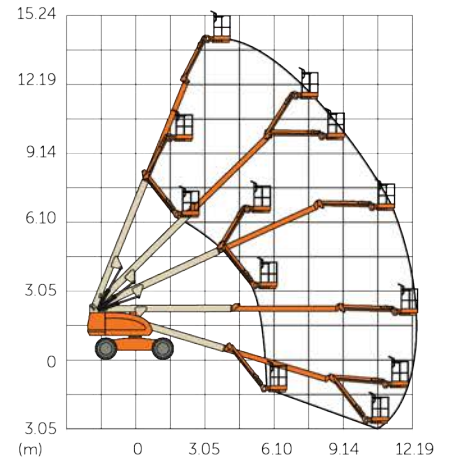


JLG 660 SJ

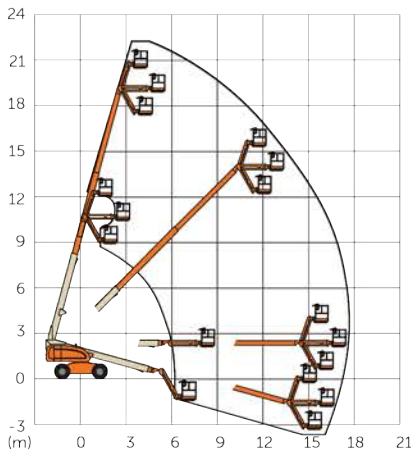


Haulotte H23 RTJ PRO

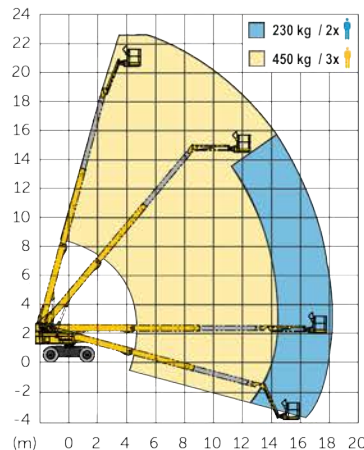


Haulotte HT28 RTJ PRO

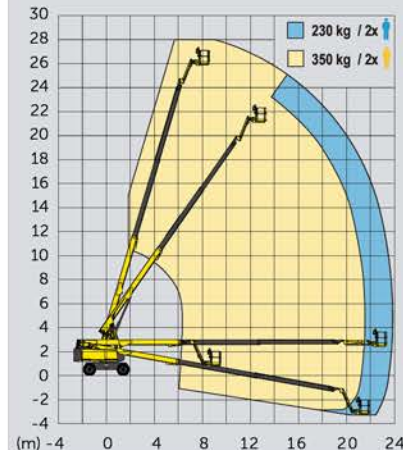


JLG 860 SJ

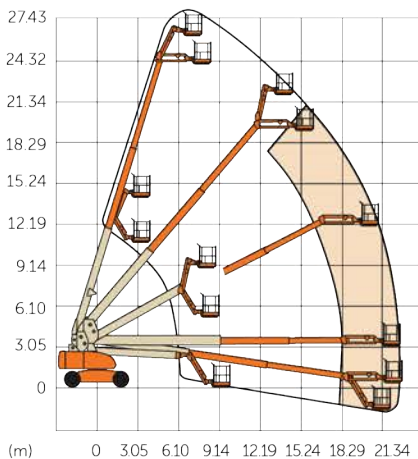


HT43 RTJ PRO

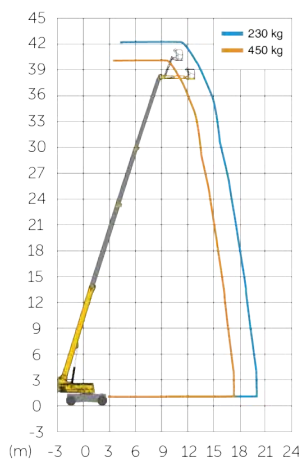

JLG 1350 SJP

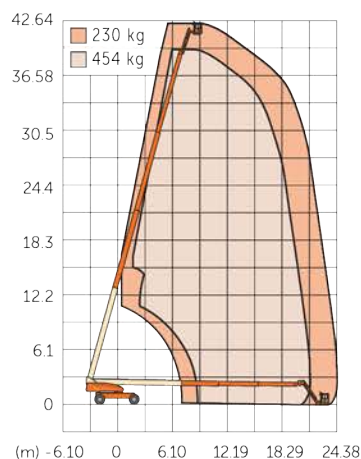

JLG 1500 SJ

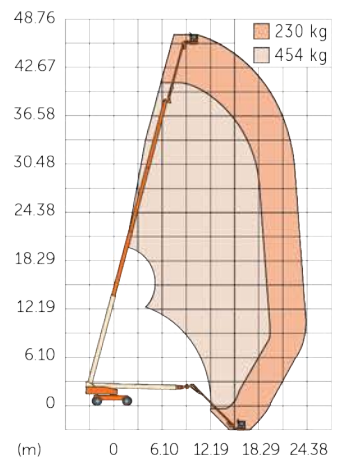




ELECTRIC ARTICULATING BOOMS


All models include **non-marking tyres** • Hybrid Models

Platform Height Metres Feet	Models	Horizontal Outreach	Up & Over Height	Lifting Capacity	Platform Size	Overall Width	Stowed Height	Stowed Length	Gradeability	Weight
9.68 m 31' 1"	Haulotte HA12 CJ+	7.22 m	4.74 m	200 kg	0.80 x 1.14 m	1.20 m	1.99 m	4.20 m	25%	7,110 kg
10.20 m 33' 6"	Nifty HR12	6.10 m	4.00 m	200 kg	0.65 x 1.10 m	1.60 m	1.95 m	4.10 m	30%	3,470 kg
10.28 m 33' 9"	JLG H340 AJ	6.06 m	5.17 m	230 kg	0.76 x 1.52 m	1.93 m	2.00 m	5.52 m	45%	4,675 kg
12.87 m 42' 3"	Haulotte HA15 IP	8.65 m	6.25 m	230 kg	1.07 x 1.15 m	1.52 m	2.10 m	6.65 m	25%	7,230 kg
13.70 m 44' 1"	Haulotte SIGMA 16 PRO	8.05 m	7.40 m	230 kg	0.80 x 1.20 m	1.75 m	2.00 m	6.65 m	25%	6,950 kg
18.76 m 61' 5"	Haulotte HA20 LE PRO	11.91 m	8.52 m	250 kg	0.80 x 1.83 m	2.41 m	2.50 m	6.19 m	45%	9,785 kg


Haulotte HA12 CJ+

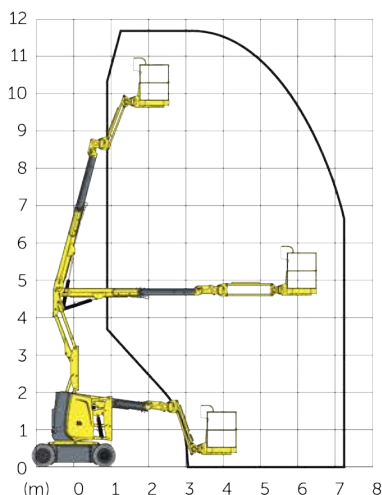


Nifty HR12

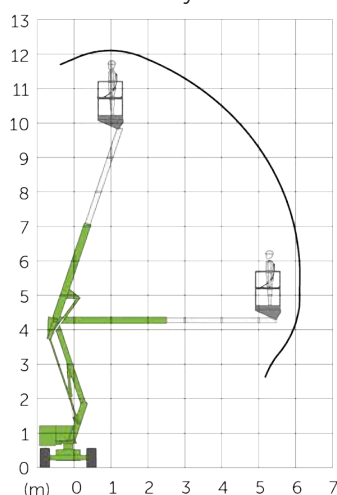


JLG H340 AJ

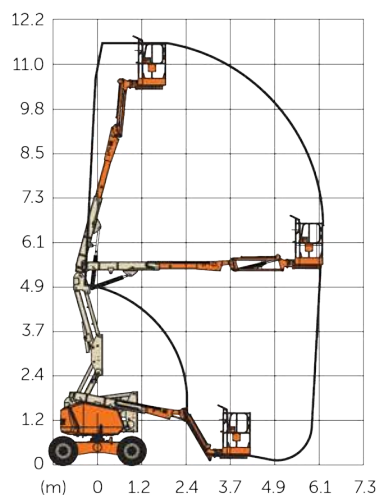


Haulotte HA15 IP

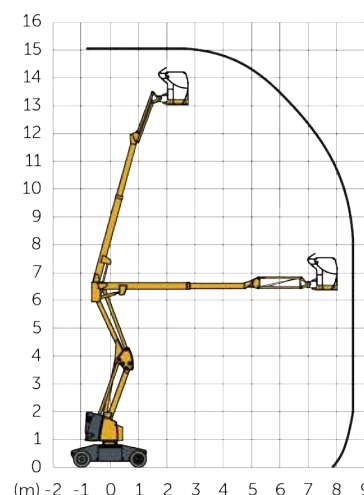

Haulotte SIGMA 16 PRO

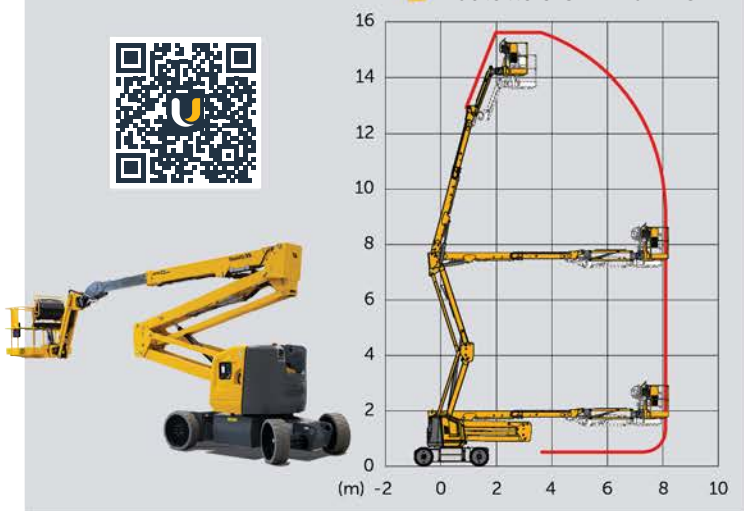

Haulotte HA20 LE PRO

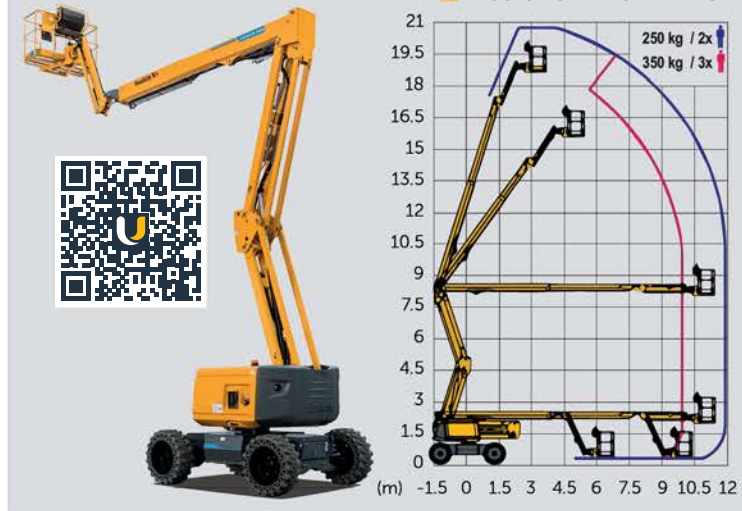


DIESEL ARTICULATING BOOMS


All models include **Anti-crush safety bar** • AC Power to Platform • Non-marking tyres

Platform Height Metres Feet	Models	Horizontal Outreach	Up & Over Height	Lifting Capacity	Platform Size	Overall Width Stowed Axles Ext.	Stowed Height	Stowed Length	Gradeability	Weight
10.40 m 34' 1"	Haulotte HA120 PX	6.60 m	5.70 m	230 kg	0.80 x 1.50 m	1.90 m -	2.20 m	5.50 m	45%	5,620 kg
14.00 m 45' 11"	Haulotte HA16 PX	9.15 m	6.60 m	230 kg	0.80 x 1.80 m	2.30 m -	2.20 m	6.95 m	50%	6,950 kg
14.00 m 45' 11"	Haulotte HA16 RTJ PRO	8.30 m	7.65 m	230 kg	0.80 x 1.83 m	2.44 m -	2.30 m	6.75 m	40%	6,650 kg
15.30 m 50' 2"	Haulotte HA18 PX	10.60 m	6.60 m	230 kg	0.78 x 1.80 m	2.30 m -	2.30 m	7.60 m	50%	8,050 kg
18.86 m 61' 11"	Haulotte HA20 RTJ PRO	12.12 m	8.40 m	230 kg	0.80 x 1.83 m	2.42 m -	2.51 m	8.80 m	45%	9,600 kg
23.60 m 77' 5"	Haulotte HA260 PX	16.20 m	6.76 m	230 kg	0.80 x 1.80 m	2.38 m -	2.71 m	12.00 m	40%	15,890 kg
24.38 m 79' 11"	JLG 800 AJ	15.80 m	9.78 m	230 kg	0.91 x 1.83 m	2.44 m -	3.00 m	11.13 m	30 / 45%	15,558 kg
24.40 m 80' 1"	Haulotte HA26 RTJ PRO	17.50 m	9.30 m	250 kg	0.91 x 2.44 m	2.48 m -	2.97 m	11.80 m	45%	15,500 kg
29.80 m 97' 9"	Haulotte HA32 PX	21.30 m	11.35 m	250 kg	0.80 x 2.44 m	2.53 m 3.30 m	2.80 m	11.40 m	45%	20,100 kg
38.10 m 125' 7"	JLG 1250 AJP	19.25 m	18.44 m	227 / 454 kg	0.91 x 2.44 m	2.49 m 3.81 m	3.05 m	11.46 m	n/a / 45%	20,080 kg
39.50 m 129' 7"	Haulotte HA41 RTJ PRO	20.10 m	17.50 m	230 kg	0.91 x 2.44 m	2.50 m 3.33 m	2.99 m	13.10 m	40%	23,900 kg


➤ Haulotte HA120 PX

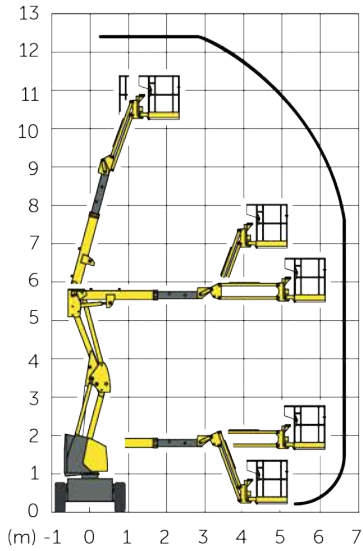


➤ Haulotte HA16 /18 PX

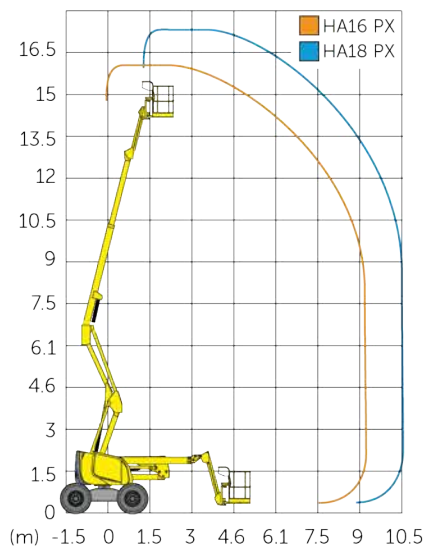


➤ Haulotte HA16 RTJ PRO

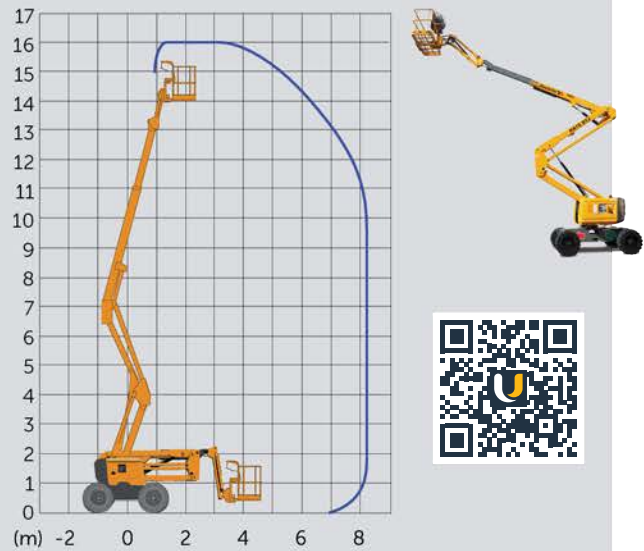


➤ Haulotte HA20 RTJ PRO

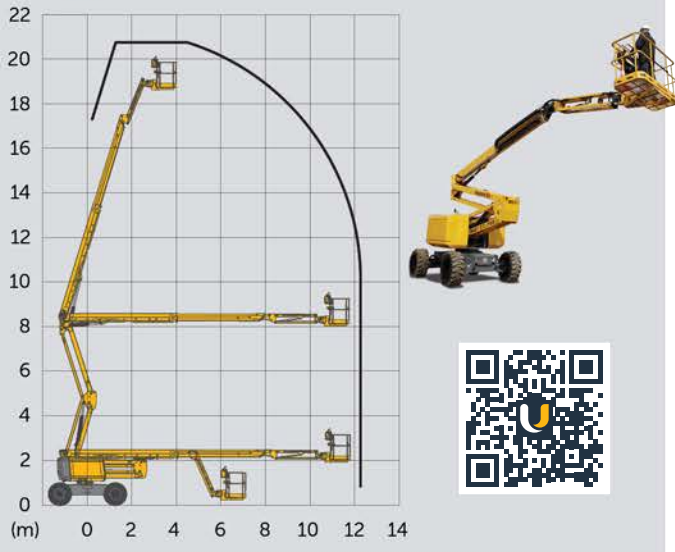


➤ Haulotte HA260 PX

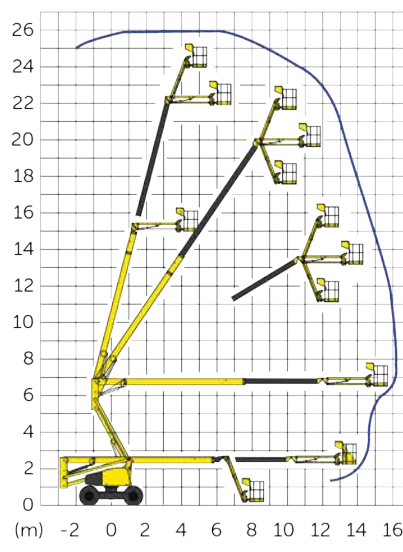


➤ JLG 800 AJ

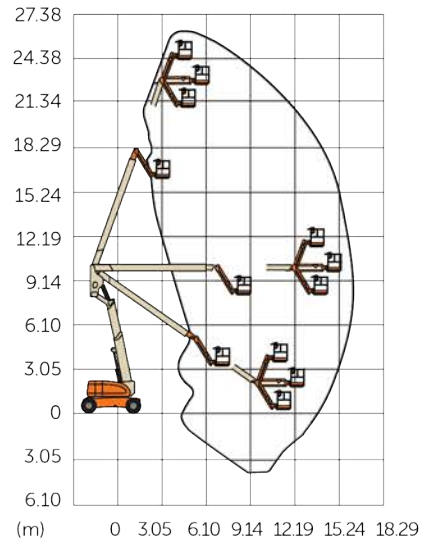


➤ Haulotte HA26 RTJ PRO

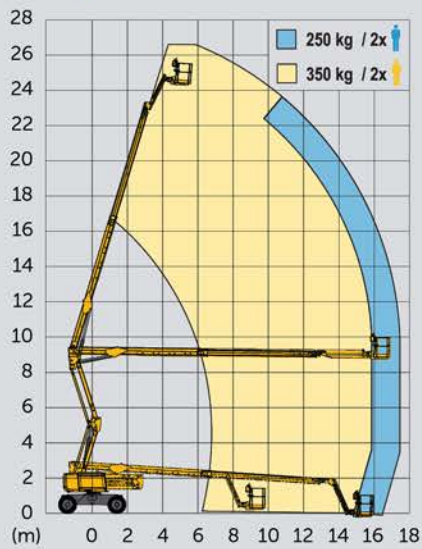



➤ Haulotte HA32 PX

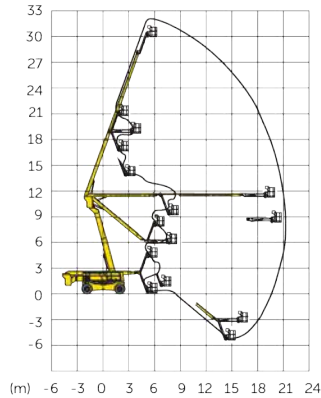

➤ JLG 1250 AJ

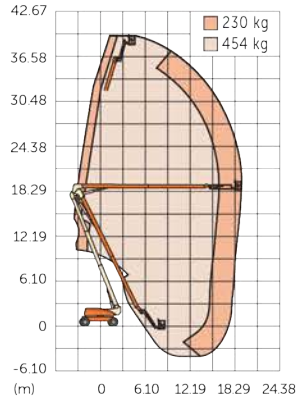

➤ Haulotte HA41 RTJ PRO

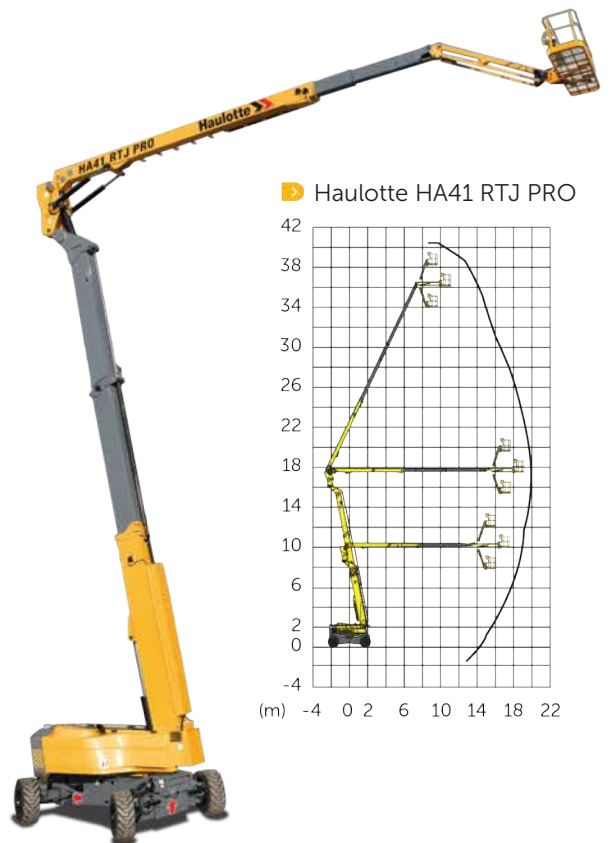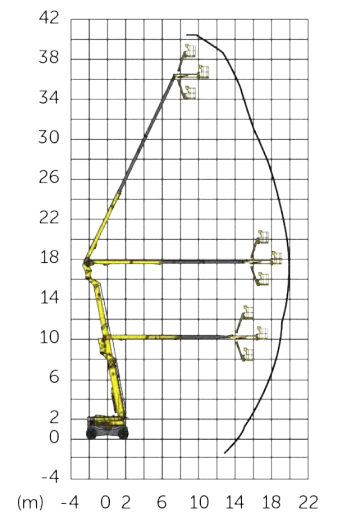



TELEHANDLERS





Maximum Lift Capacity	Models	Maximum Fork Height Metres Feet	Maximum Forward Reach	Overall Height	Overall Width	Length at fork holder plate	Gross Vehicle weight	Stabilisers
2,500 kg	JCB 525-60	6.00 m 19' 8"	3.06 m	1.89 m	1.84 m	4.00 m	5,490 kg	✗
2,990 kg	Haulotte HTL 3010	10.00 m 32' 1"	7.20 m	2.42 m	2.26 m	4.96 m	8,570 kg	✗
3,000 kg	JCB 531-70	7.00 m 22' 11"	3.70 m	2.49 m	2.34 m	4.99 m	7,220 kg	✗
3,500 kg	Haulotte HTL 3510	10.00 m 32' 9"	7.20 m	2.42 m	2.26 m	4.96 m	8,570 kg	✗
4,000 kg	Haulotte HTL 4014	13.60 m 44' 7"	9.80 m	2.60 m	2.43 m	6.46 m	10,420 kg	✓
4,000 kg	Haulotte HTL 4017	16.70 m 54' 9"	12.85 m	2.60 m	2.43 m	6.70 m	11,710 kg	✓
4,000 kg	JCB 540-180 (HV)	17.51 m 57' 5"	13.34 m	2.59 m	2.35 m	6.27 m	11,380 kg	✓

JCB 525-60

Haulotte HTL 3010

JCB 531-70







Haulotte HTL 3510

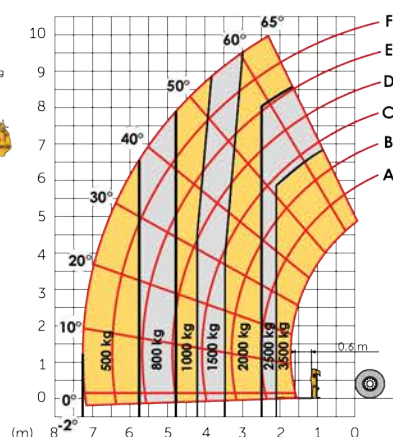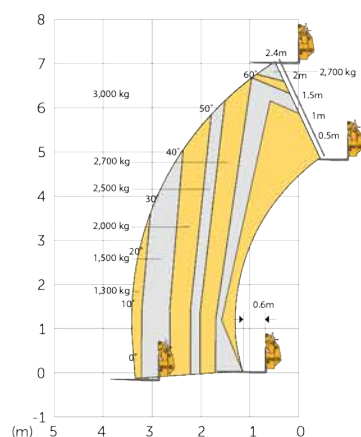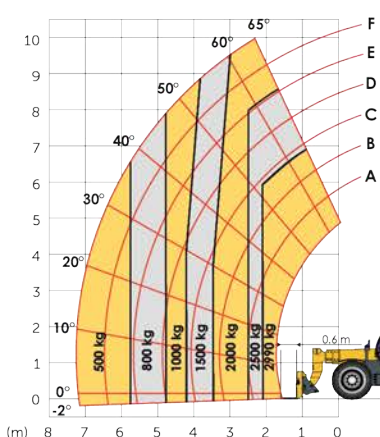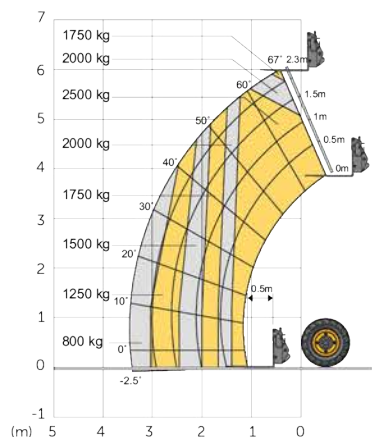

Haulotte HTL 4014

Haulotte HTL 4017

JCB 540-180 (HV)

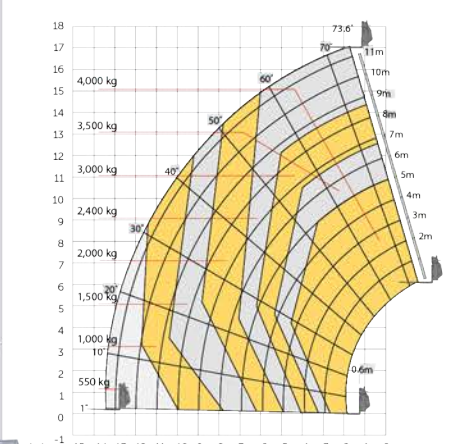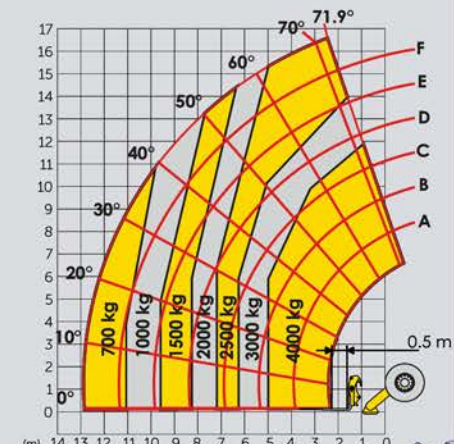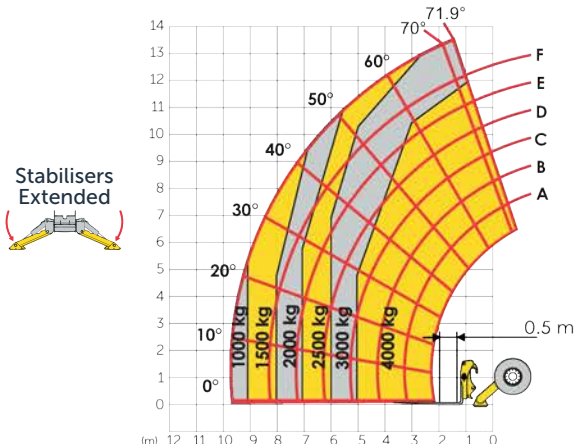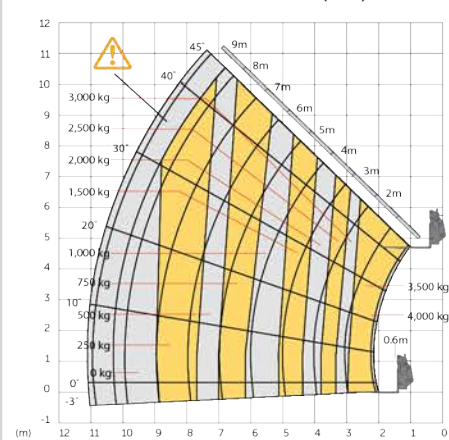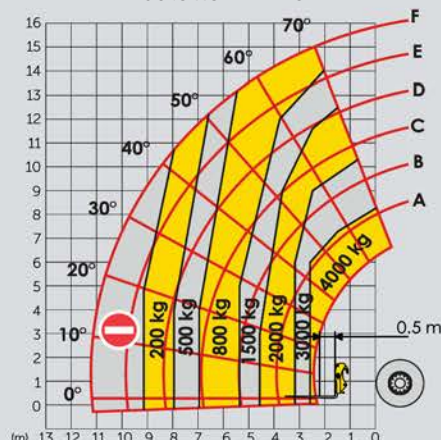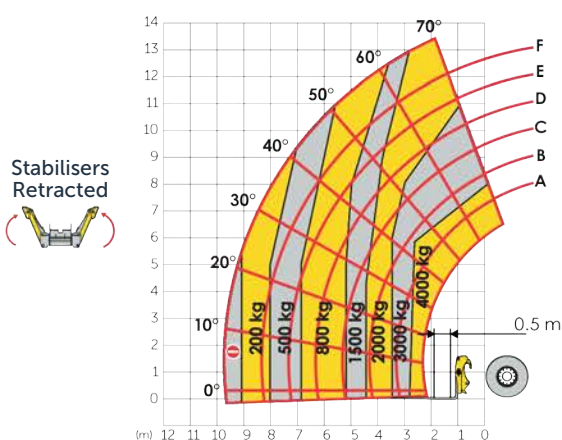

FORKLIFTS & CONTAINER LIFT TRUCKS



Pallet Trucks



1.5-2T Electric Walkie

- Ergonomic controls
- Speedy acceleration
- Precision drive control
- Water resistant construction

Walkie Stackers



1-2T Electric

- Up to 5,000mm masts
- Double reach masts
- Precision drive control
- Closed chassis with waterproofing

Reach Trucks



0.9-3T Stand-on 1.4-2T Sit-on

- 4,300mm-13,000mm masts
- Double reach masts
- Side shift attachment

Order Pickers



1T Stand-on

- 4,300mm-8,500mm masts
- Side shift attachment

Electric Forklifts



1-2.5T 4-Wheel 1.3-2T 3-Wheel

- 4,300mm-7,000mm masts
- Container masts
- Side shift attachment

LPG / Petrol & Diesel Forklifts



1-65T Forklifts

2.5T All Terrain Forklifts

- 4,300mm-6,000mm masts
- Container masts
- Side shift attachment
- High performance engines
- Heavy duty masts

Container Handlers & Reach Stackers



8-10T Empty Container Handlers

- 7-8 container high masts
- Single & Twin Pick masts
- Fast lift and lowering speeds



35-45T Top Lift Container Handlers

- 3-5 container high masts
- High lift capacity
- Fast lift, lowering & driving speeds



10-45T Reach Stackers

- 3-6 container high / 3 rows deep
- Empty, Full & Intermodal models
- High lift capacity

WE'RE UNITED BEHIND YOUR BUSINESS



T: 131 607

unitedequipment.com.au

SALES | RENTALS | SERVICE | PARTS | FINANCE | TRAINING

WE BRING MORE OF THE WORLD'S BEST TO YOU



KONECRANES

Haulotte

ALMACRAWLER



WA

Perth
Bunbury

NT

Darwin

SA

Adelaide

QLD

Brisbane
Mackay
Rockhampton

NSW

Sydney

VIC

Melbourne
Ballarat

TAS

Devonport