



XCMG



XC988

WHEEL LOADER

Engine	Weichai WP12 Tier III
Maximum Power	250 kW @ 2100 rpm
Operating Weight	27,400 kg
Bucket Capacity	4.5 m ³
Rated Operating Load	8,500 kg





XCMG

SOLID
TO SUCCEED

XC988

SPECIFICATIONS

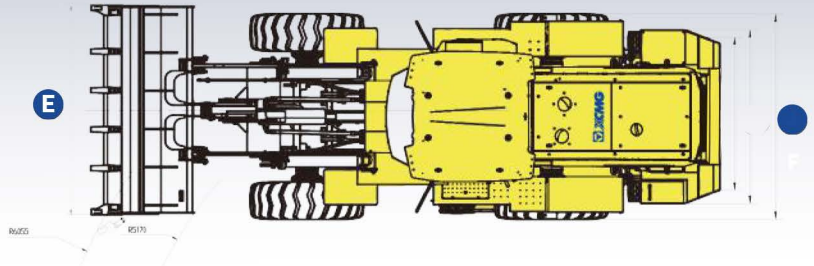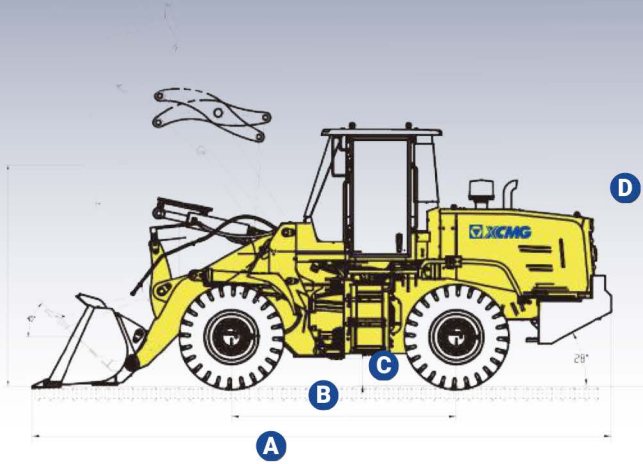

Main dimensions

Unit: mm

Model	A	B	C	D	E	F
XC988	8950	3600	448	3220	3230	2400

ENGINE

Make	Weichai
Model	WP12
Emission Regulation	Tier III
Maximum Power	250 kW @ 2100 rpm
Displacement	11.6 L

TRANSMISSION

Make	XCMG
Type	Countershaft, Powershift
Maximum Travel Speed fwd	36.5 km/h

AXLES

Differential Type	Limited slip
-------------------	--------------

BRAKES

Service Brake System	Wet disc brake
Service Brake Actuation	Hydraulic
Parking Brake System	Manual electronic control
Parking Brake Actuation	Hydraulic

TYRES

Size	29.5R25
Type	Tubeless

STEERING

Steering Configuration	Articulated
------------------------	-------------

LOADING SPECIFICATIONS

Bucket Capacity	4.5 m ³
Rated Operating Load	8,500 kg
Dumping Angle	45°
Bucket Width	3230 mm
Maximum Dump Height	3220 mm
Maximum Dumping Distance	1217 mm
Maximum Digging Force	240 kN

HYDRAULIC SYSTEM

Main Pump Type	Gear + Piston
Hydraulic Cycle Time	10.8 s

OPERATING WEIGHT

Operating Weight	27,400 kg
------------------	-----------

OPERATOR STATION

Cabin Safety	ROPS & FOPS
--------------	-------------